

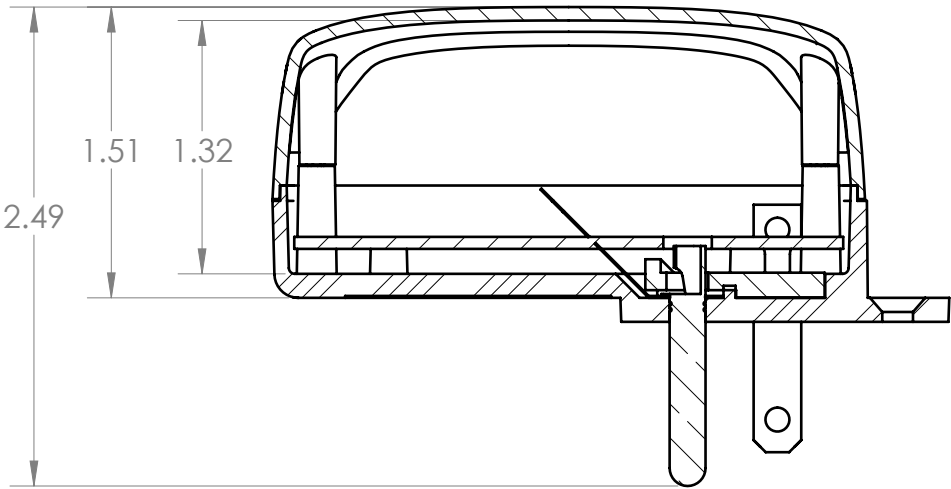
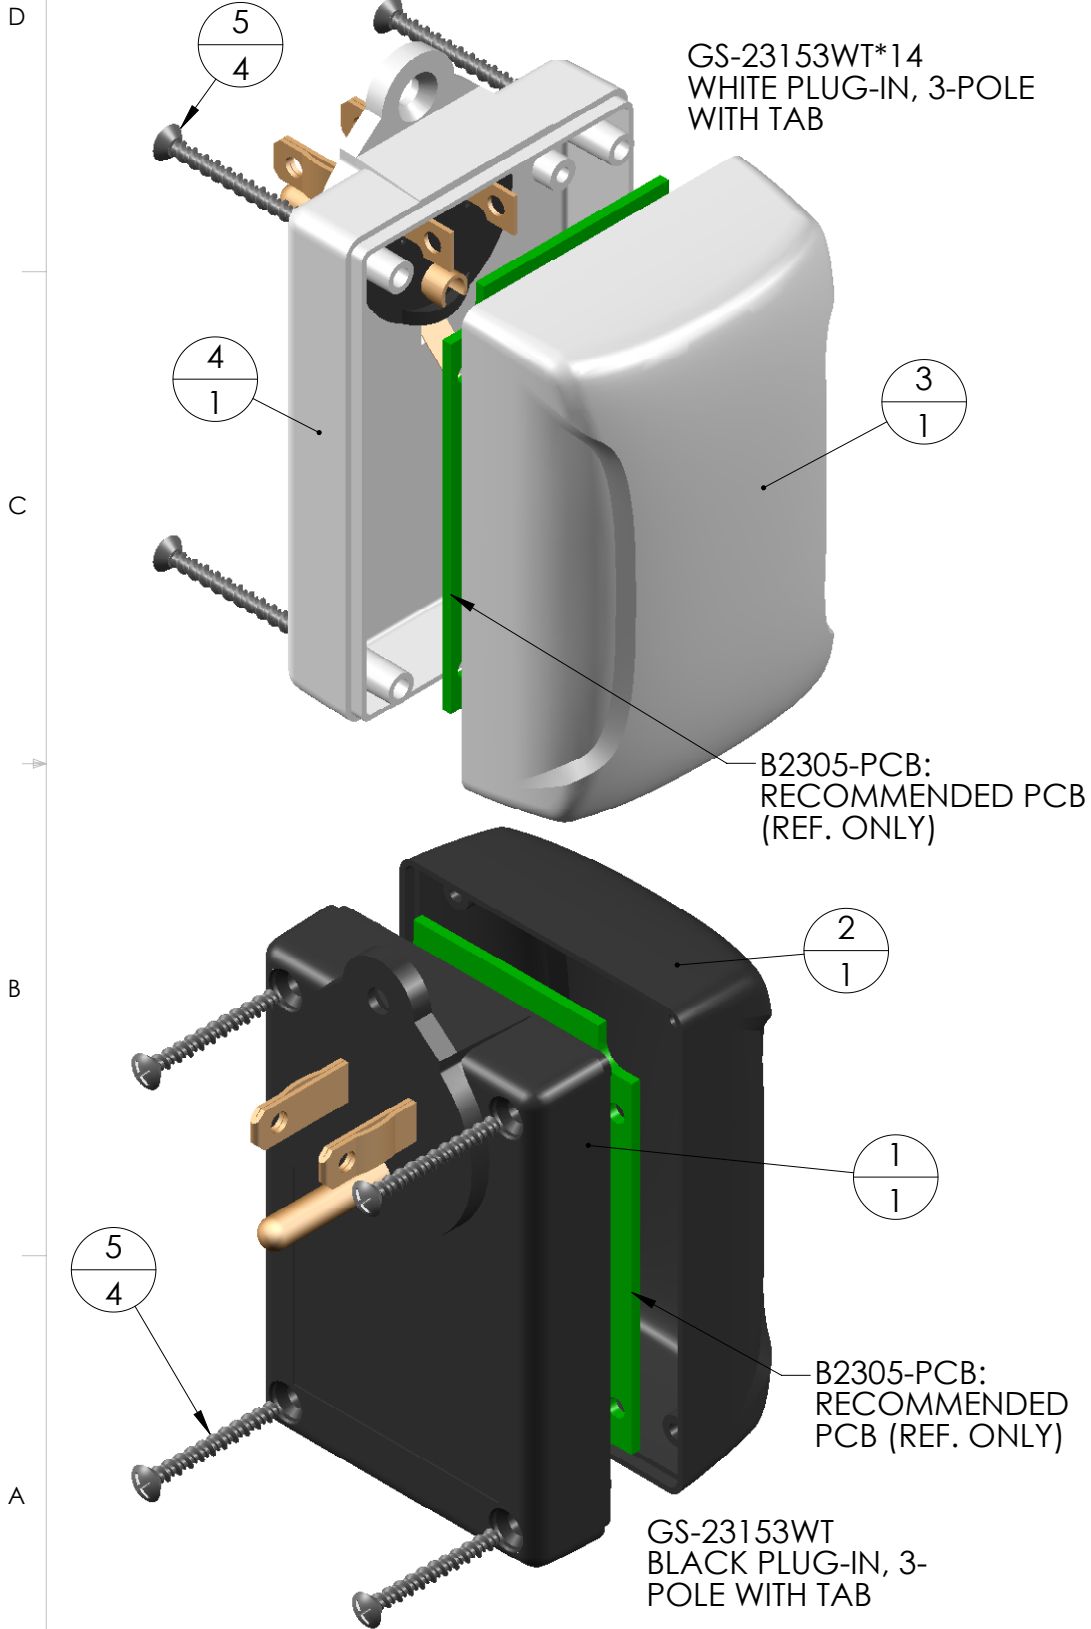


ITEM NO.	PART NUMBER	DESCRIPTION	GS-23153WT/QTY.	GS-23153WT*14/QTY.
1	B23053XWT	BLACK PLUG-IN BASE, 3 POLE, WITH TAB	1	-
2	GS-2310BP	CASE, BLACK	1	-
3	GS-2310BP*14	CASE, WHITE	-	1
4	B23053XWT*14	WHITE PLUG-IN BASE, 3 POLE, WITH TAB	-	1
5	SCREWS-HL1-BR	THREAD FORMING ASS'Y SCREW: 1.00 INCH	4	4

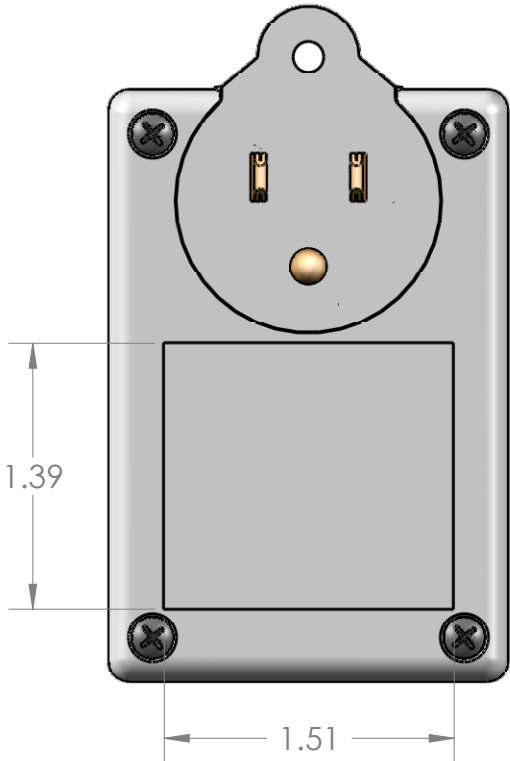

SECTION A-A

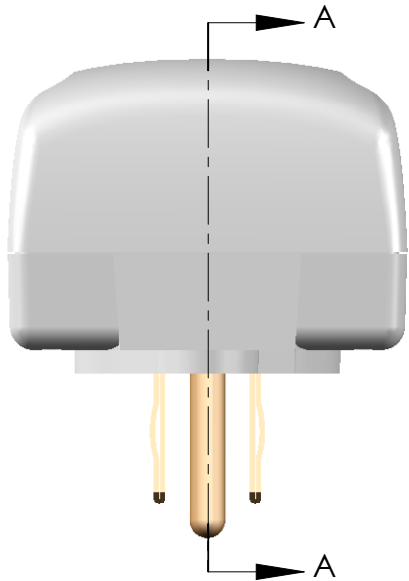

NOTES:
1.

REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE
REVISIONS					

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES: ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL: $\pm .010$
THREE PLACE DECIMAL: $\pm .005$
PRINTED GRAPHICS: $\pm .010$
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: GS-2315 ASS'Y

PART NO.
GS-2315 ASS'Y
PRODUCT

CLIENT

DRAWN
CHECKED

NAME

D.M.F.

DATE

3/9/2009
12/31/2999



POLYCASE™
YOUR PERFECT FIT
1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088

SIZE

B

TITLE:
PRODUCT ASSEMBLY
DRAWING


REV


-

SCALE: 1:1








SHEET 1 OF 1

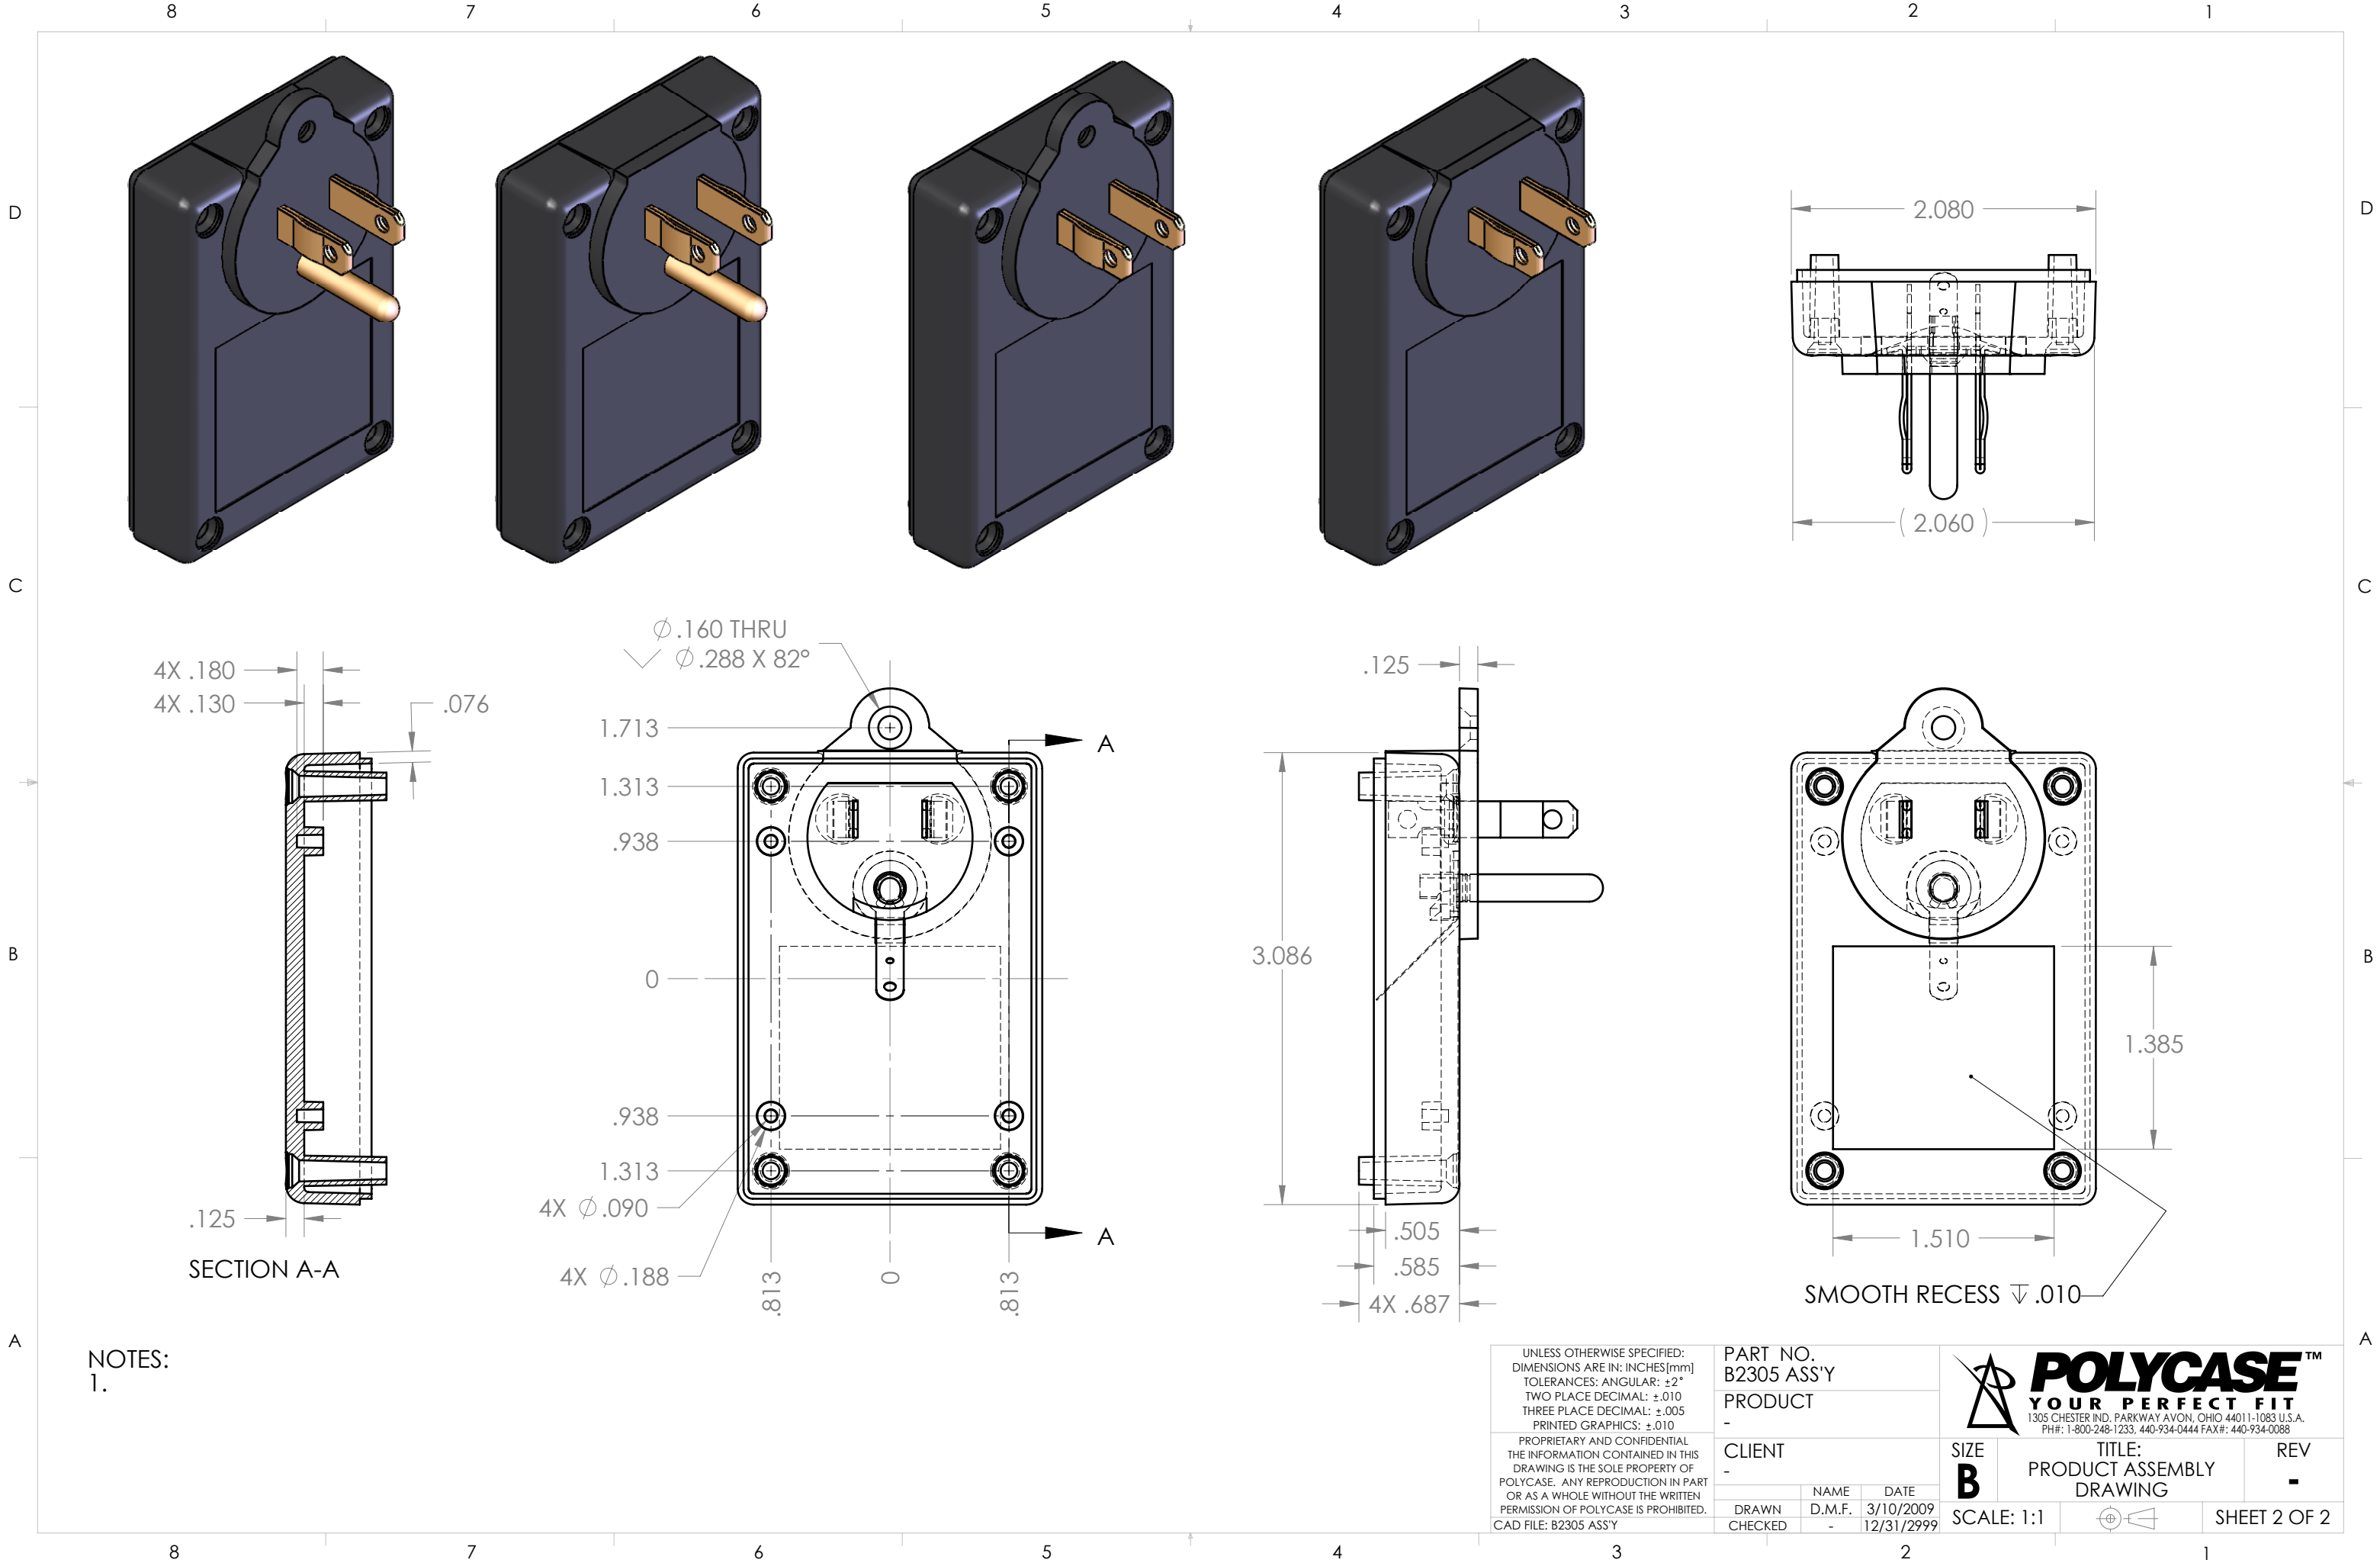

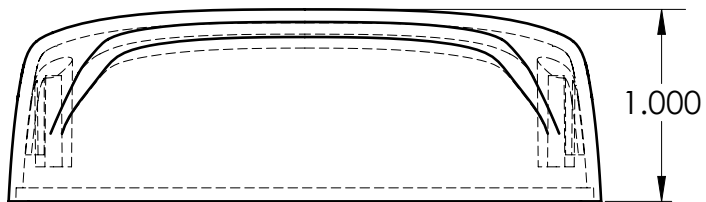

NOTES:
1.

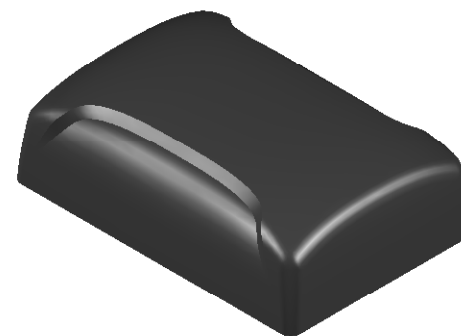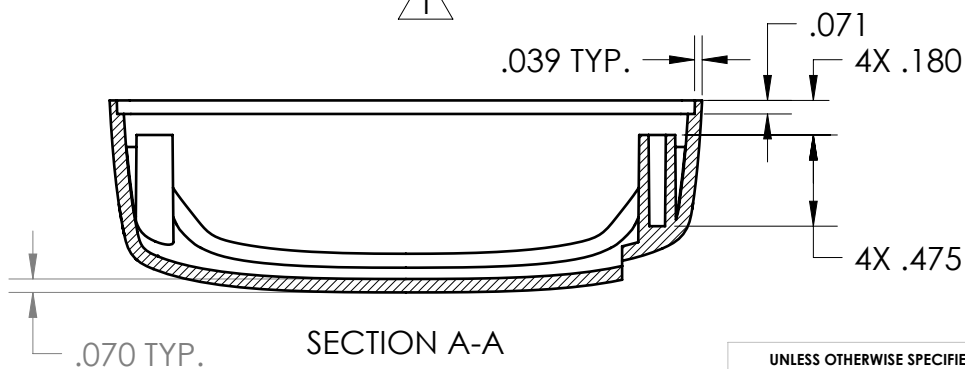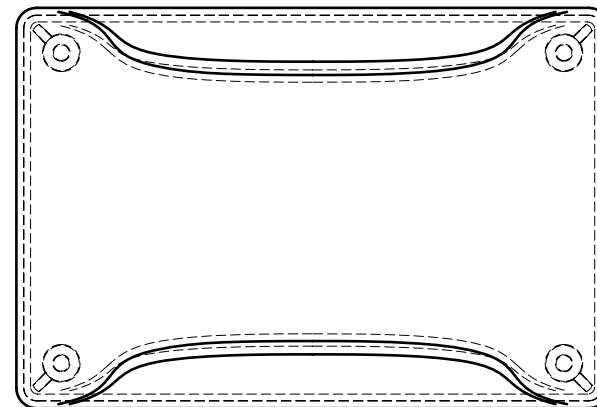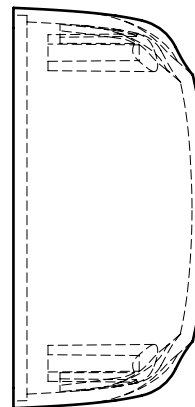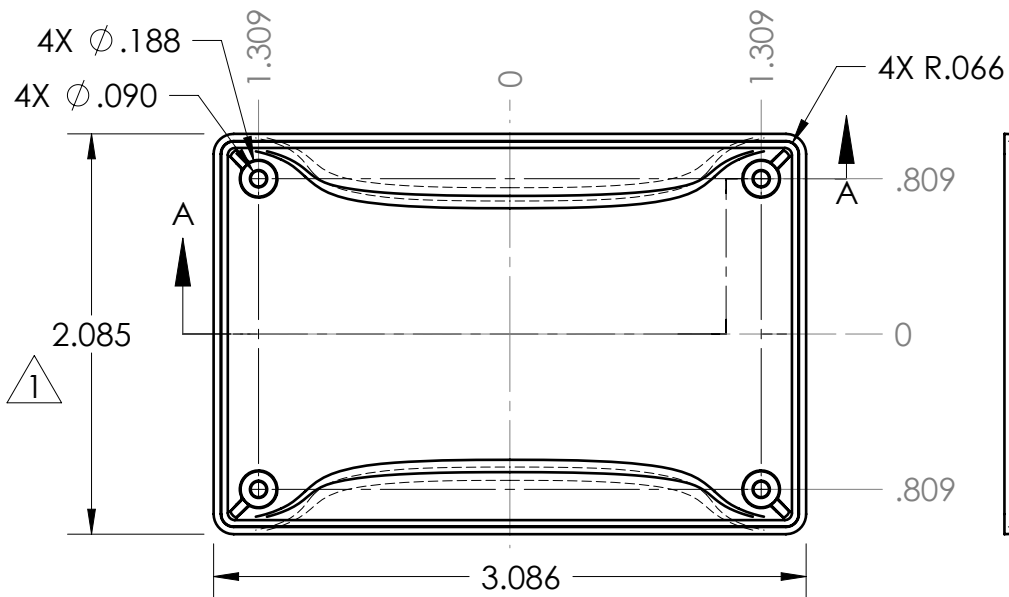

SECTION A-A

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL: $\pm .010$
THREE PLACE DECIMAL: $\pm .005$

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: GS-2310B

PART NO.
GS-2310BP
PRODUCT

CLIENT



POLYCASE™
YOUR PERFECT FIT
1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088

SIZE
A

TITLE:
Product Detail Drawing

REV
1

SCALE: 1:1



SHEET 1 OF 1

REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE
1	3.086 WAS 3.081 2.085 WAS 2.080	B4 C5	D.M.F.		3/23/2009

REVISIONS



5

4

3



2

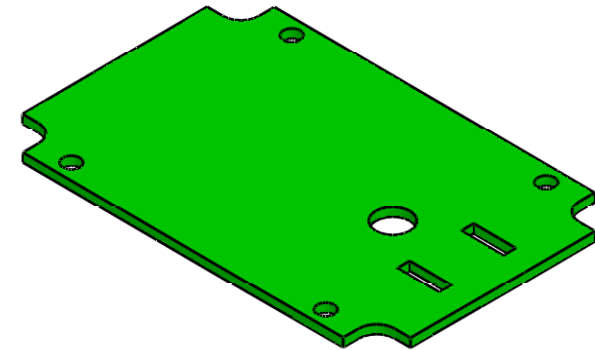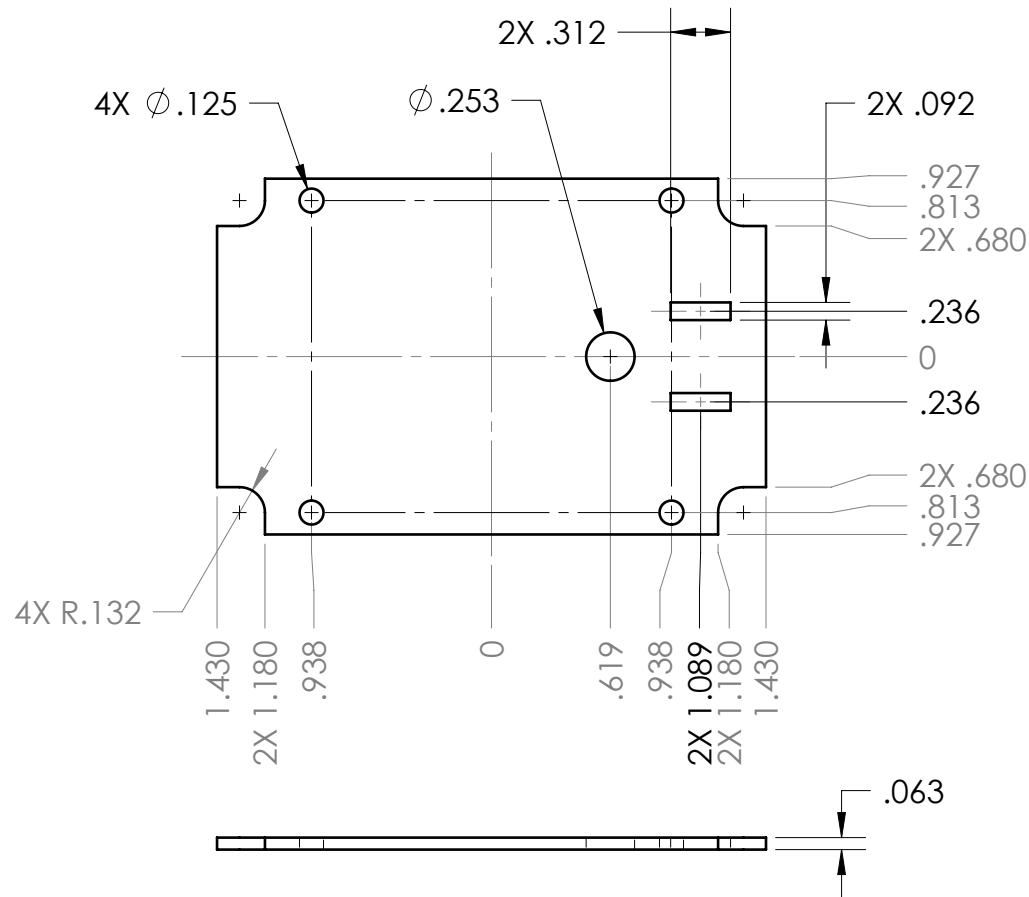1



NOTES:

1. INCLUDES .031 CLEARANCE WITH INSIDE WALLS, BLADES, GROUND PIN, AND SCREW TOWERS.
2. AN OPTIONAL METHOD OF CONNECTING PCB TO BLADES AND GROUND PIN IS TO DECREASE THE CLEARANCE AROUND THE BLADES AND GROUND PIN AND SOLDER THEM DIRECTLY TO THE PCB.

<div>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES[mm] TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±.010 THREE PLACE DECIMAL: ±.005 PRINTED GRAPHICS: ±.010</div> <div>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED.</div> <div>CAD FILE: B2305-PCB</div>						<div>PART NO. B2305-PCB</div>		<div>POLYCASE™ YOUR PERFECT FIT 1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A. PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088</div>				
						<div>PRODUCT -</div>		<div>SIZE A</div> <div>TITLE: PCB Drawing</div> <div>REV -</div>				
						<div>CLIENT -</div>						
						<div>DRAWN CHECKED</div> <div>NAME D.M.F. B.M.B.</div> <div>DATE 3/11/2009 3/25/2009</div>						
ZONE	REV.	DESCRIPTION	BY	APPR'D	DATE	<div>SCALE: 1:1</div> <div></div> <div>SHEET 1 OF 1</div>						
REVISIONS												

ZONE	REV.	DESCRIPTION	BY	APPR'D	DATE
REVISIONS					

5

4

3

2

1