
BOM Table							
ITEM NO.	PART NUMBER	Rev.	DESCRIPTION	Material	Color	Flame Rating	QT\
1	WP-40B*15	-	WP BASE, W/PCB BOSSES	POLYCARBONATE	LIGHT GRAY	UL94-HB (UL FILE E41613)	1
2	WC-41C*08	-	WC COVER, W/GASKET	POLYCARBONATE	CLEAR	UL94-HB (UL FILE E41613)	1
3	SCREWS-SSM4-20-6	-	ASSEMBLY SCREWS, 6 PACK				1
3.1	SCREWS-SSM4-20	01 M4X0.7 X 20	Omm OAL, PHILLIPS DRIVE MACHINE SCREW	STAINLESS STEEL			6

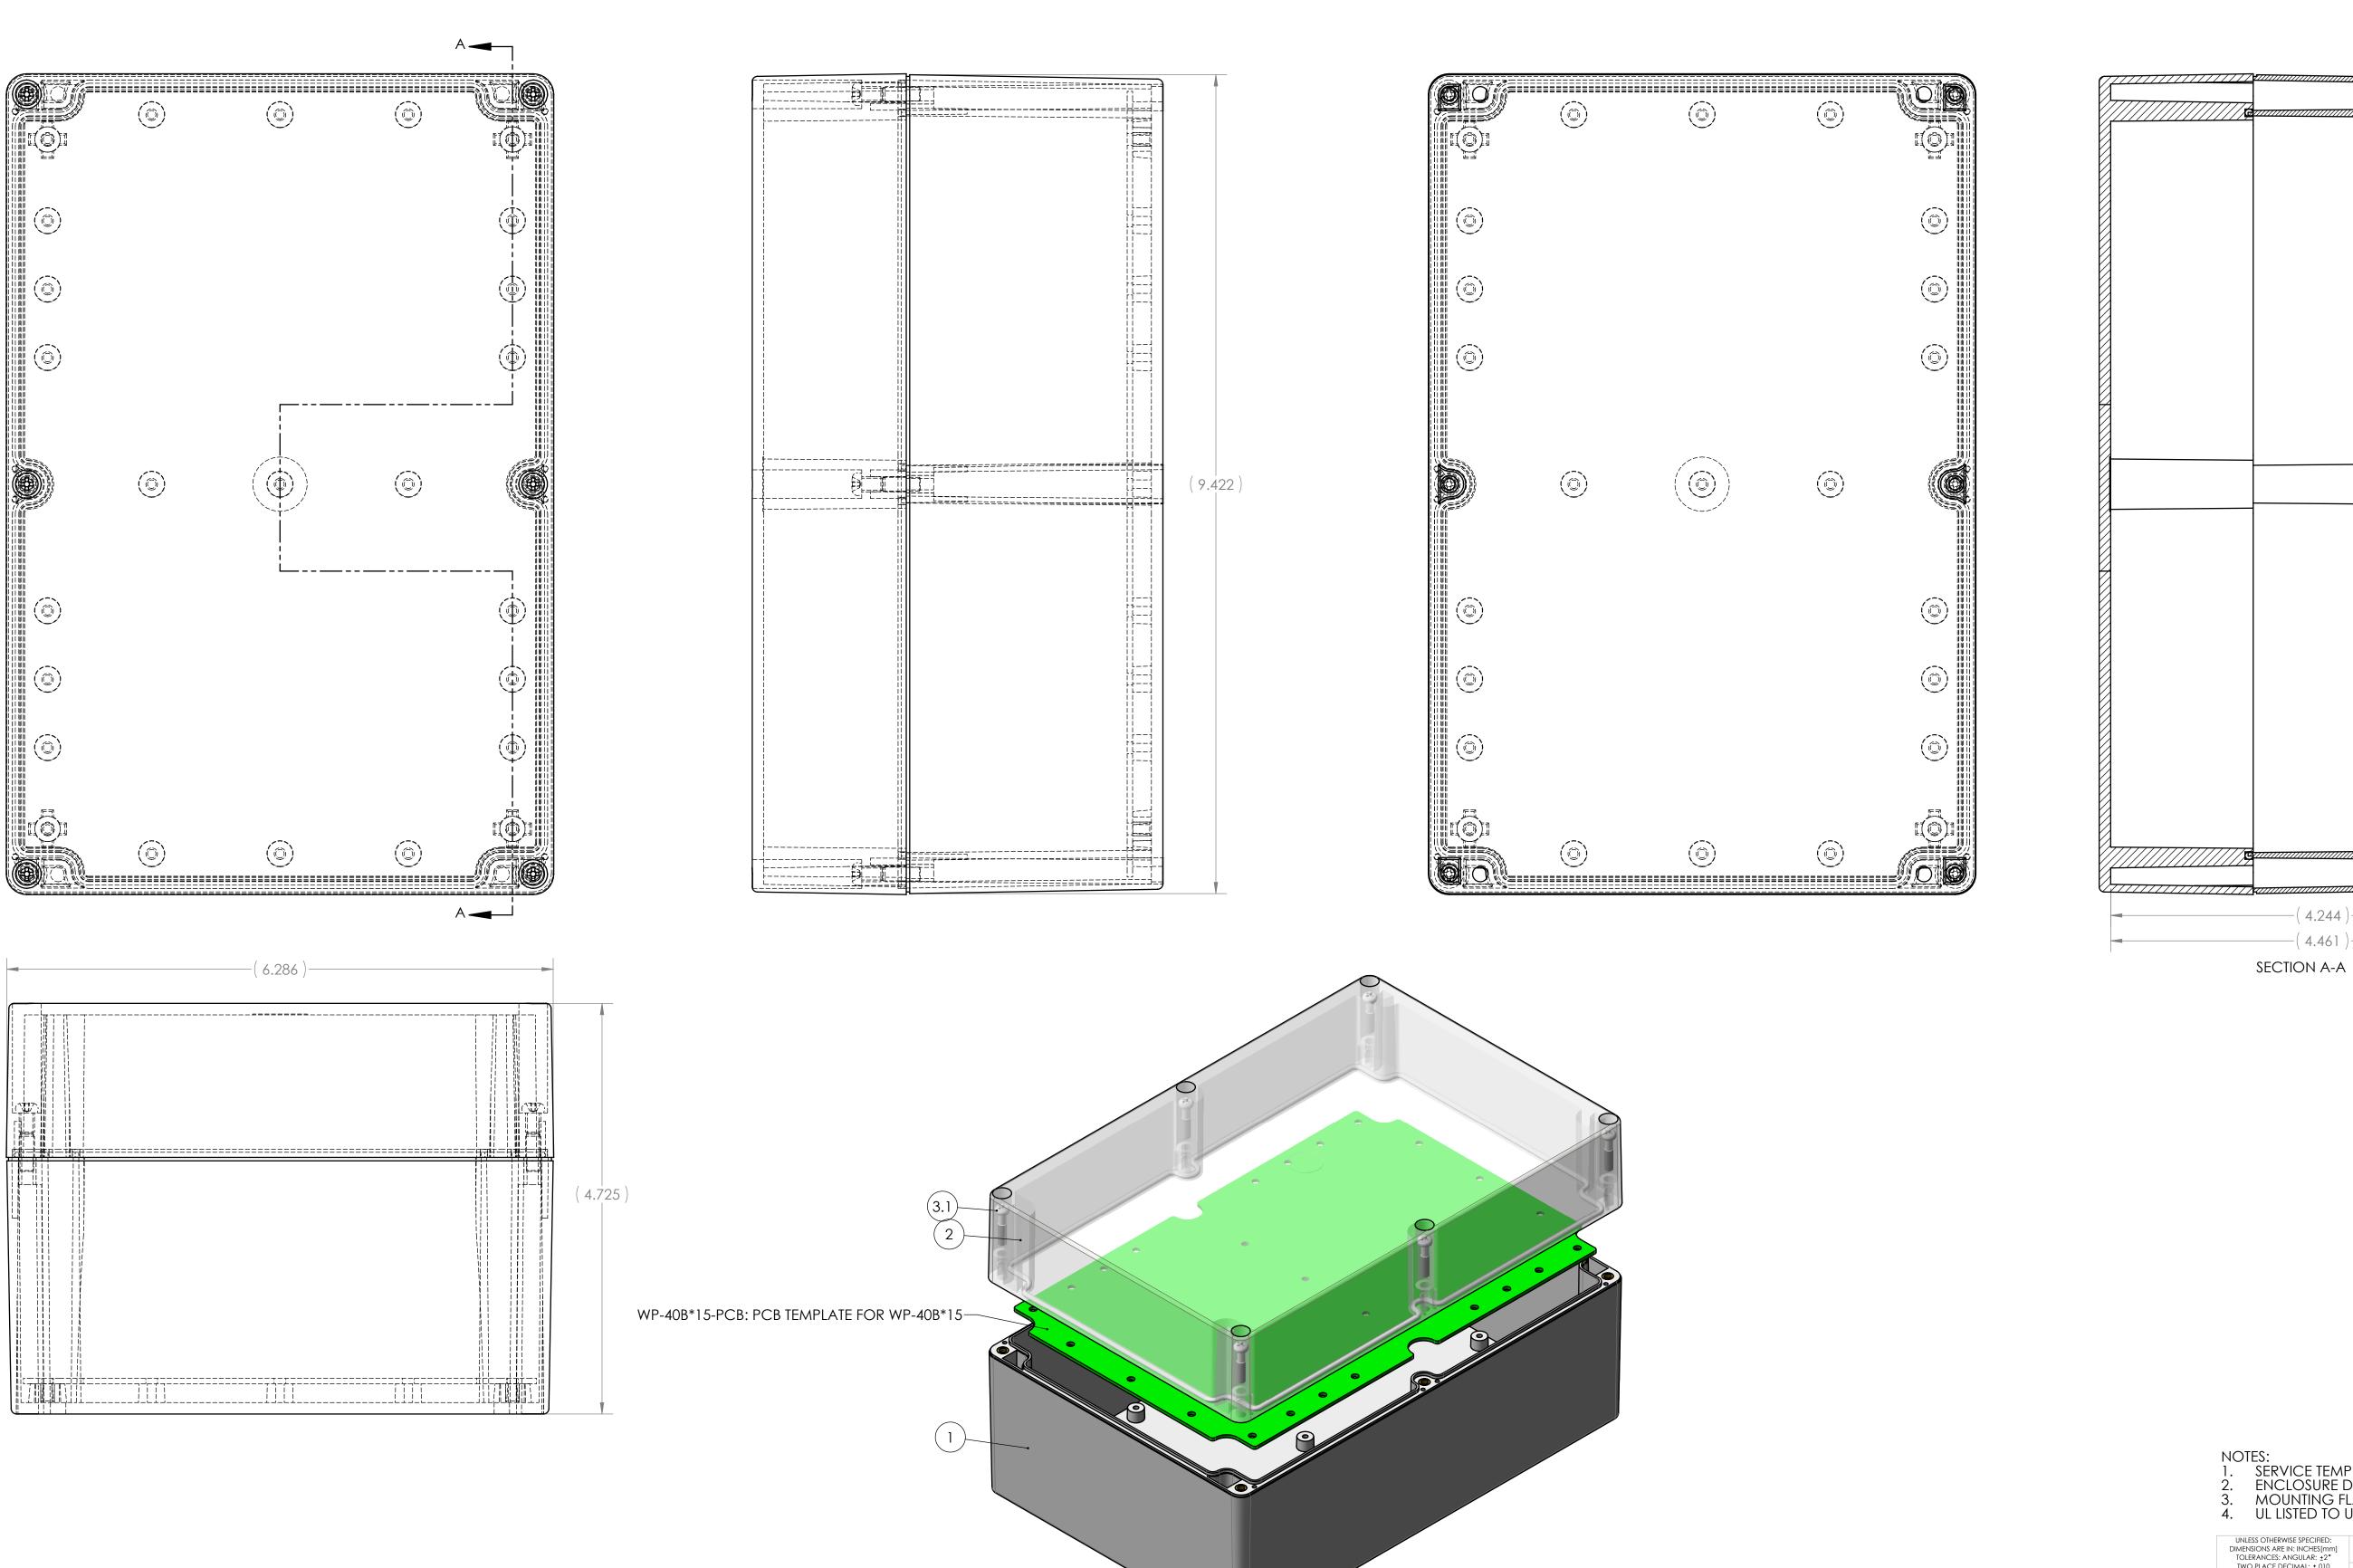

-(4.244)--(4.461)

NOTES:

1. SERVICE TEMPERATURE: -40°C TO 120°C

2. ENCLOSURE DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13.

3. MOUNTING FLANGE KITS ARE AVAILABLE FROM POLYCASE.

4. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE E194432).

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: ±2°
TWO PLACE DECIMAL: ±.010
THREE PLACE DECIMAL: ±.010
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: WC-41+1508

PART NO.
WC-41*1508

MATERIAL

FLAME RATING

SIZE
WC UNIT
W/GASKET,
CLE
DRAWN
D.M.F. 5/9/2016
SCALE: 1:1

DESCRIPTION REVISIONS

SIZE WC UNIT, W/PCB BOSSES, REV W/GASKET, LIGHT GRAY BASE, CLEAR COVER

