


С


Α


									REV.	DESCRIPTION	ZONE BY	APPR'D	DATE	
								UNLESS OTHERWISE SPECIFIED:	PART NO.	REVIS	IONS			
3.1	SCREWS-SSM4-25	-	M4X0.7 X 25mm OAL, PHILLIPS DRIVE MACHINE SCREW	STAINLESS STEEL			6	DIMENSIONS ARE IN: INCHES[mm TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±010	WC-44*1508		DOLAC			
3	SCREWS-SSM4-25-6	-	ASSEMBLY SCREWS, 6 PACK				1	THREE PLACE DECIMAL: ±.005	MATERIAL) 44011-1083 U.S.A.	
2	WC-44C*08	-	WC COVER, W/GASKET	POLYCARBONATE	CLEAR	UL94-HB (UL FILE E41613)	1	PRINTED GRAPHICS: ±.010 PROPRIETARY AND CONFIDENTIAL	S FLAME RATING	SIZE	WC UNIT, W/PCB E	ND. PARKWAY AVON, OHIO 48-1233, 440-934-0444 FAX	<u>k#: 440-934-0088</u> REV	
1	WP-44B*15	-		POLYCARBONATE	LIGHT GRAY	UL94-HB (UL FILE E41613)		THE INFORMATION CONTAINED IN TH DRAWING IS THE SOLE PROPERTY OF			'GASKET, LIGHT GR	ay base,	KL V	
ITEM NO.	. PART NUMBER	Rev.	. DESCRIPTION	Material	Color	Flame Rating	QTY.	POLYCASE. ANY REPRODUCTION IN P OR AS A WHOLE WITHOUT THE WRITTE PERMISSION OF POLYCASE IS PROHIBITI	N NAME		CLEAR COVE	R	—	
	BOM Table								D. DRAWN D.M.F. CHECKED C.C.B.	. 8/29/2011 SCALE:	1:1	SHEET	1 OF 1	
	4		3			2				1				

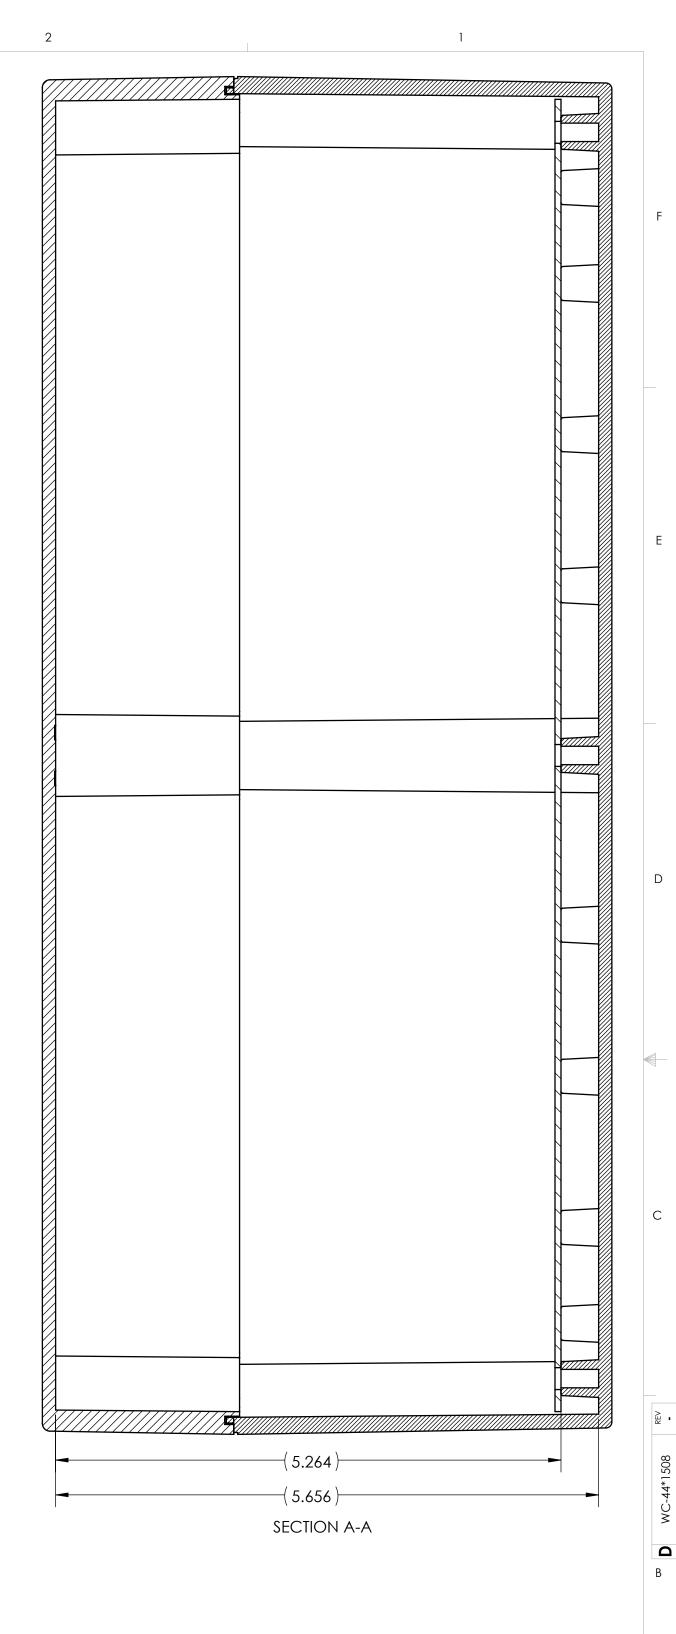


NOTES: 1. ENCLOSURE DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13. 2. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE E194432). 3. SERVICE TEMPERATURE: -40°C TO 120°C

Α

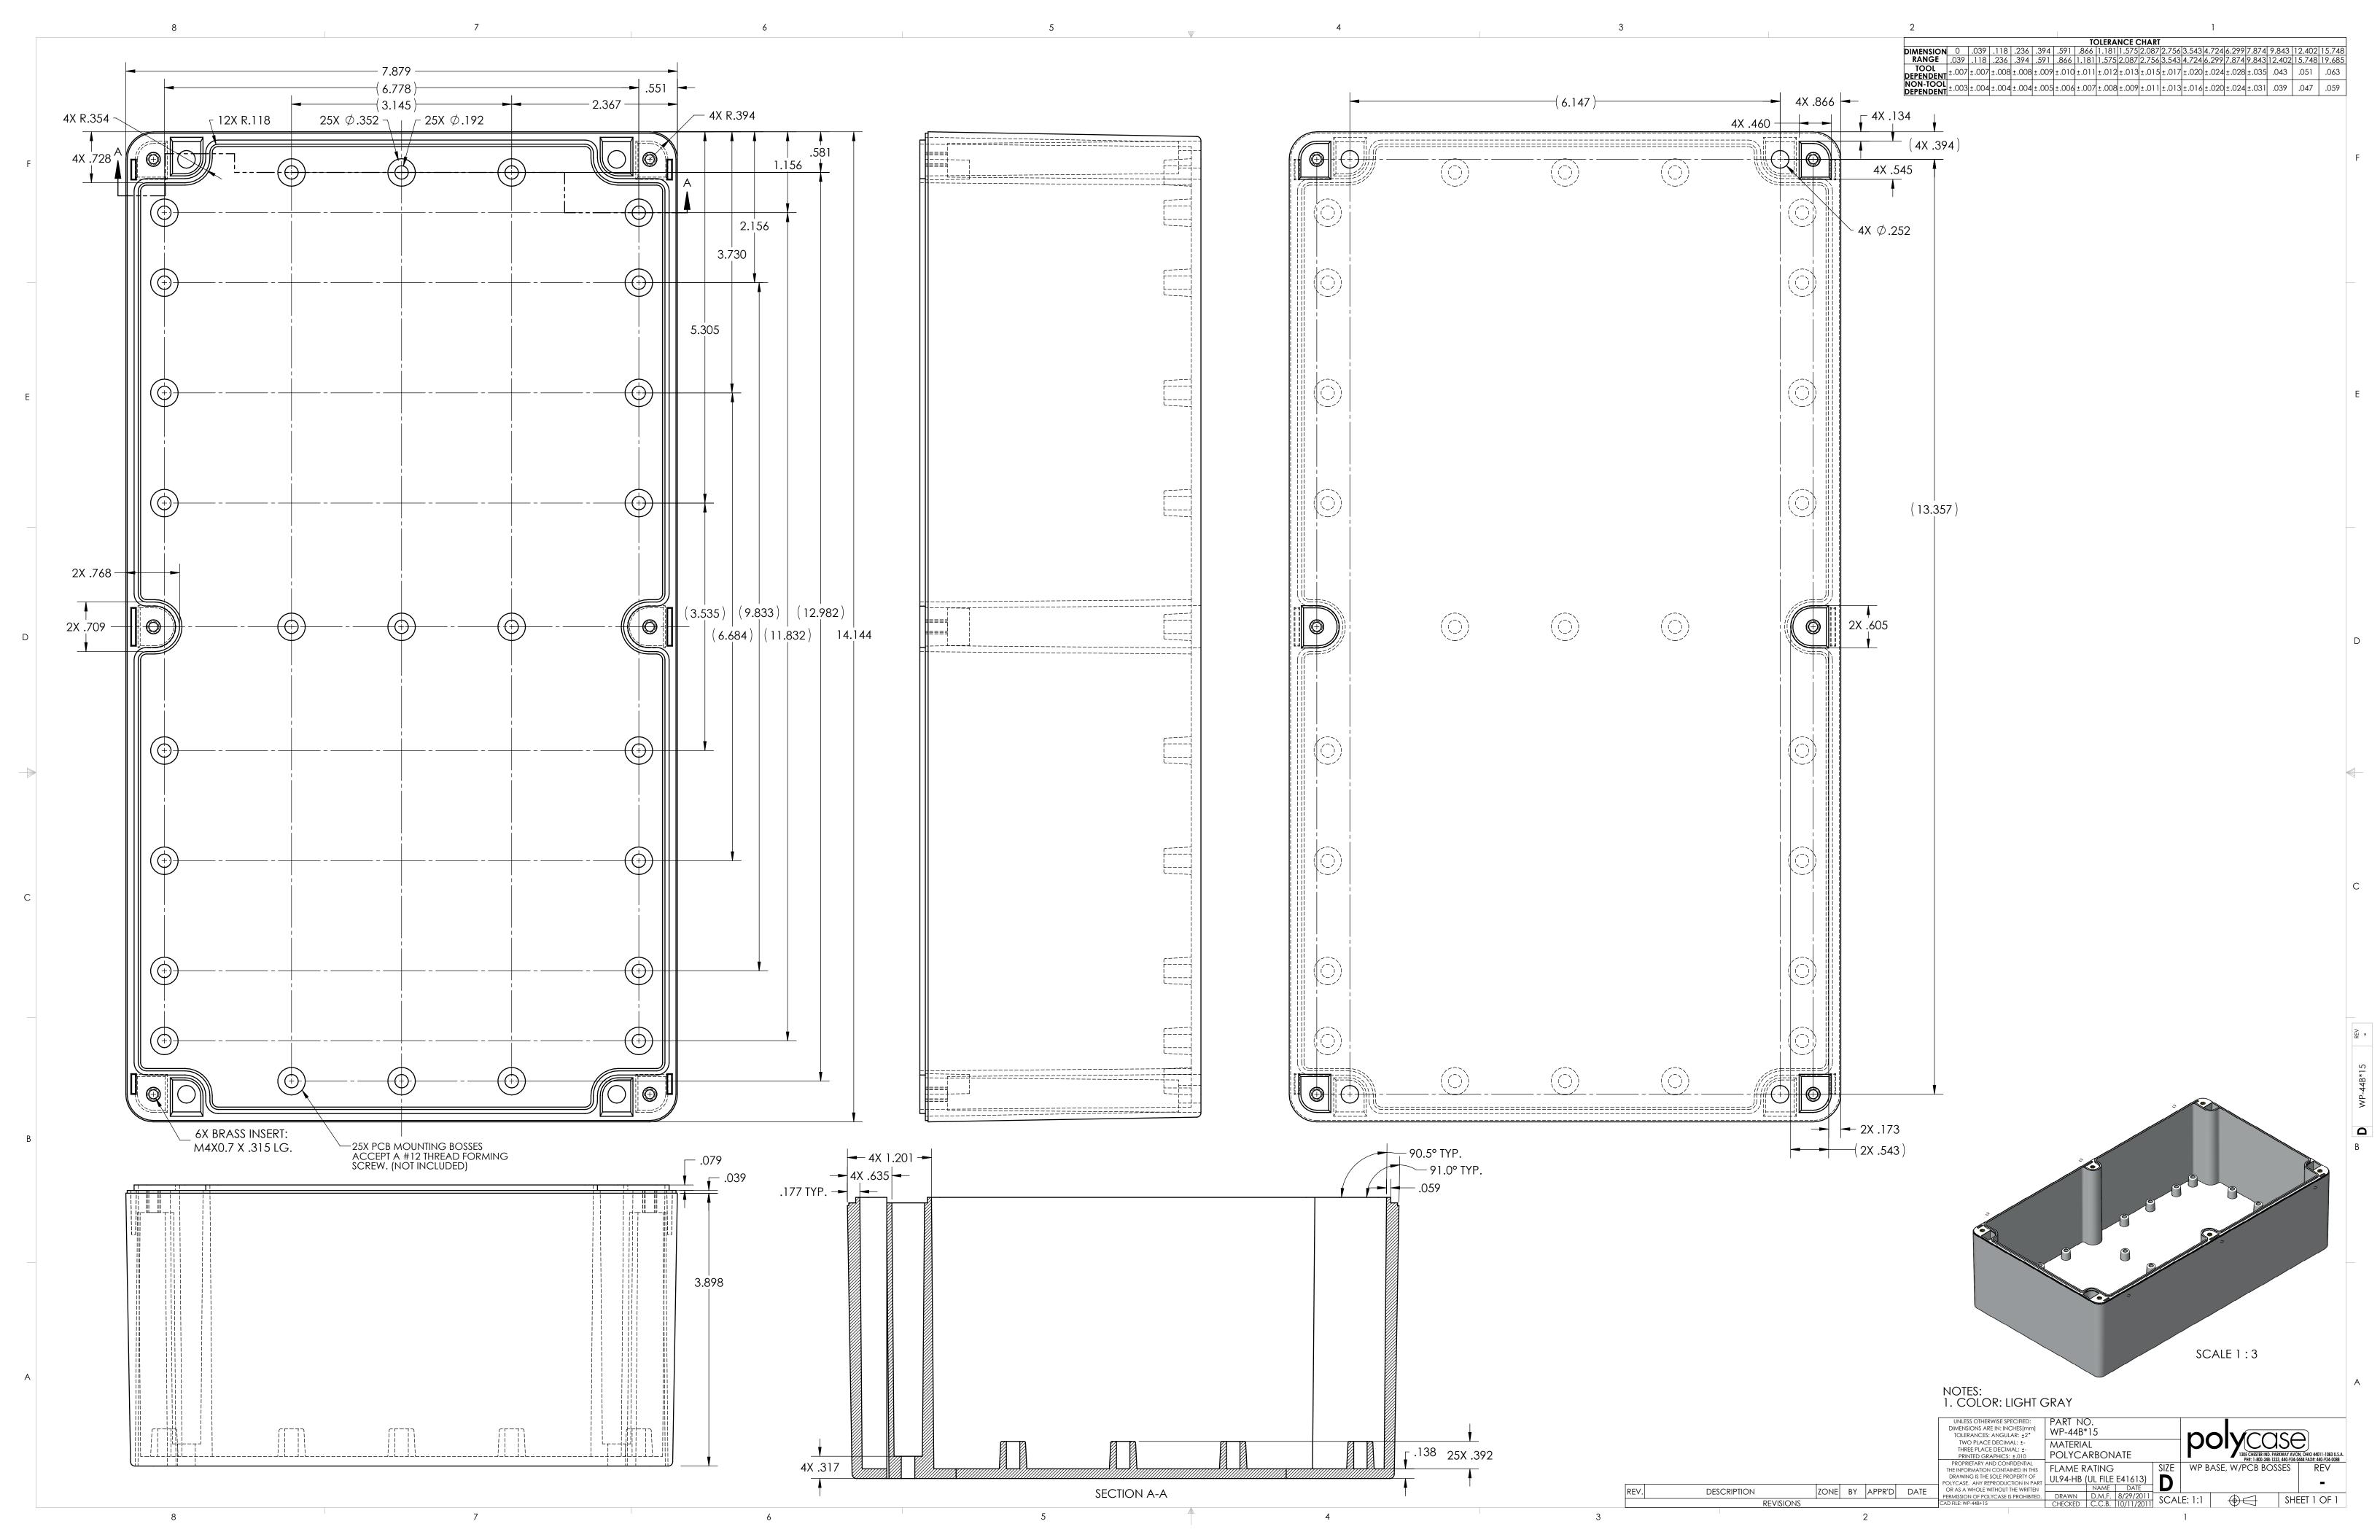

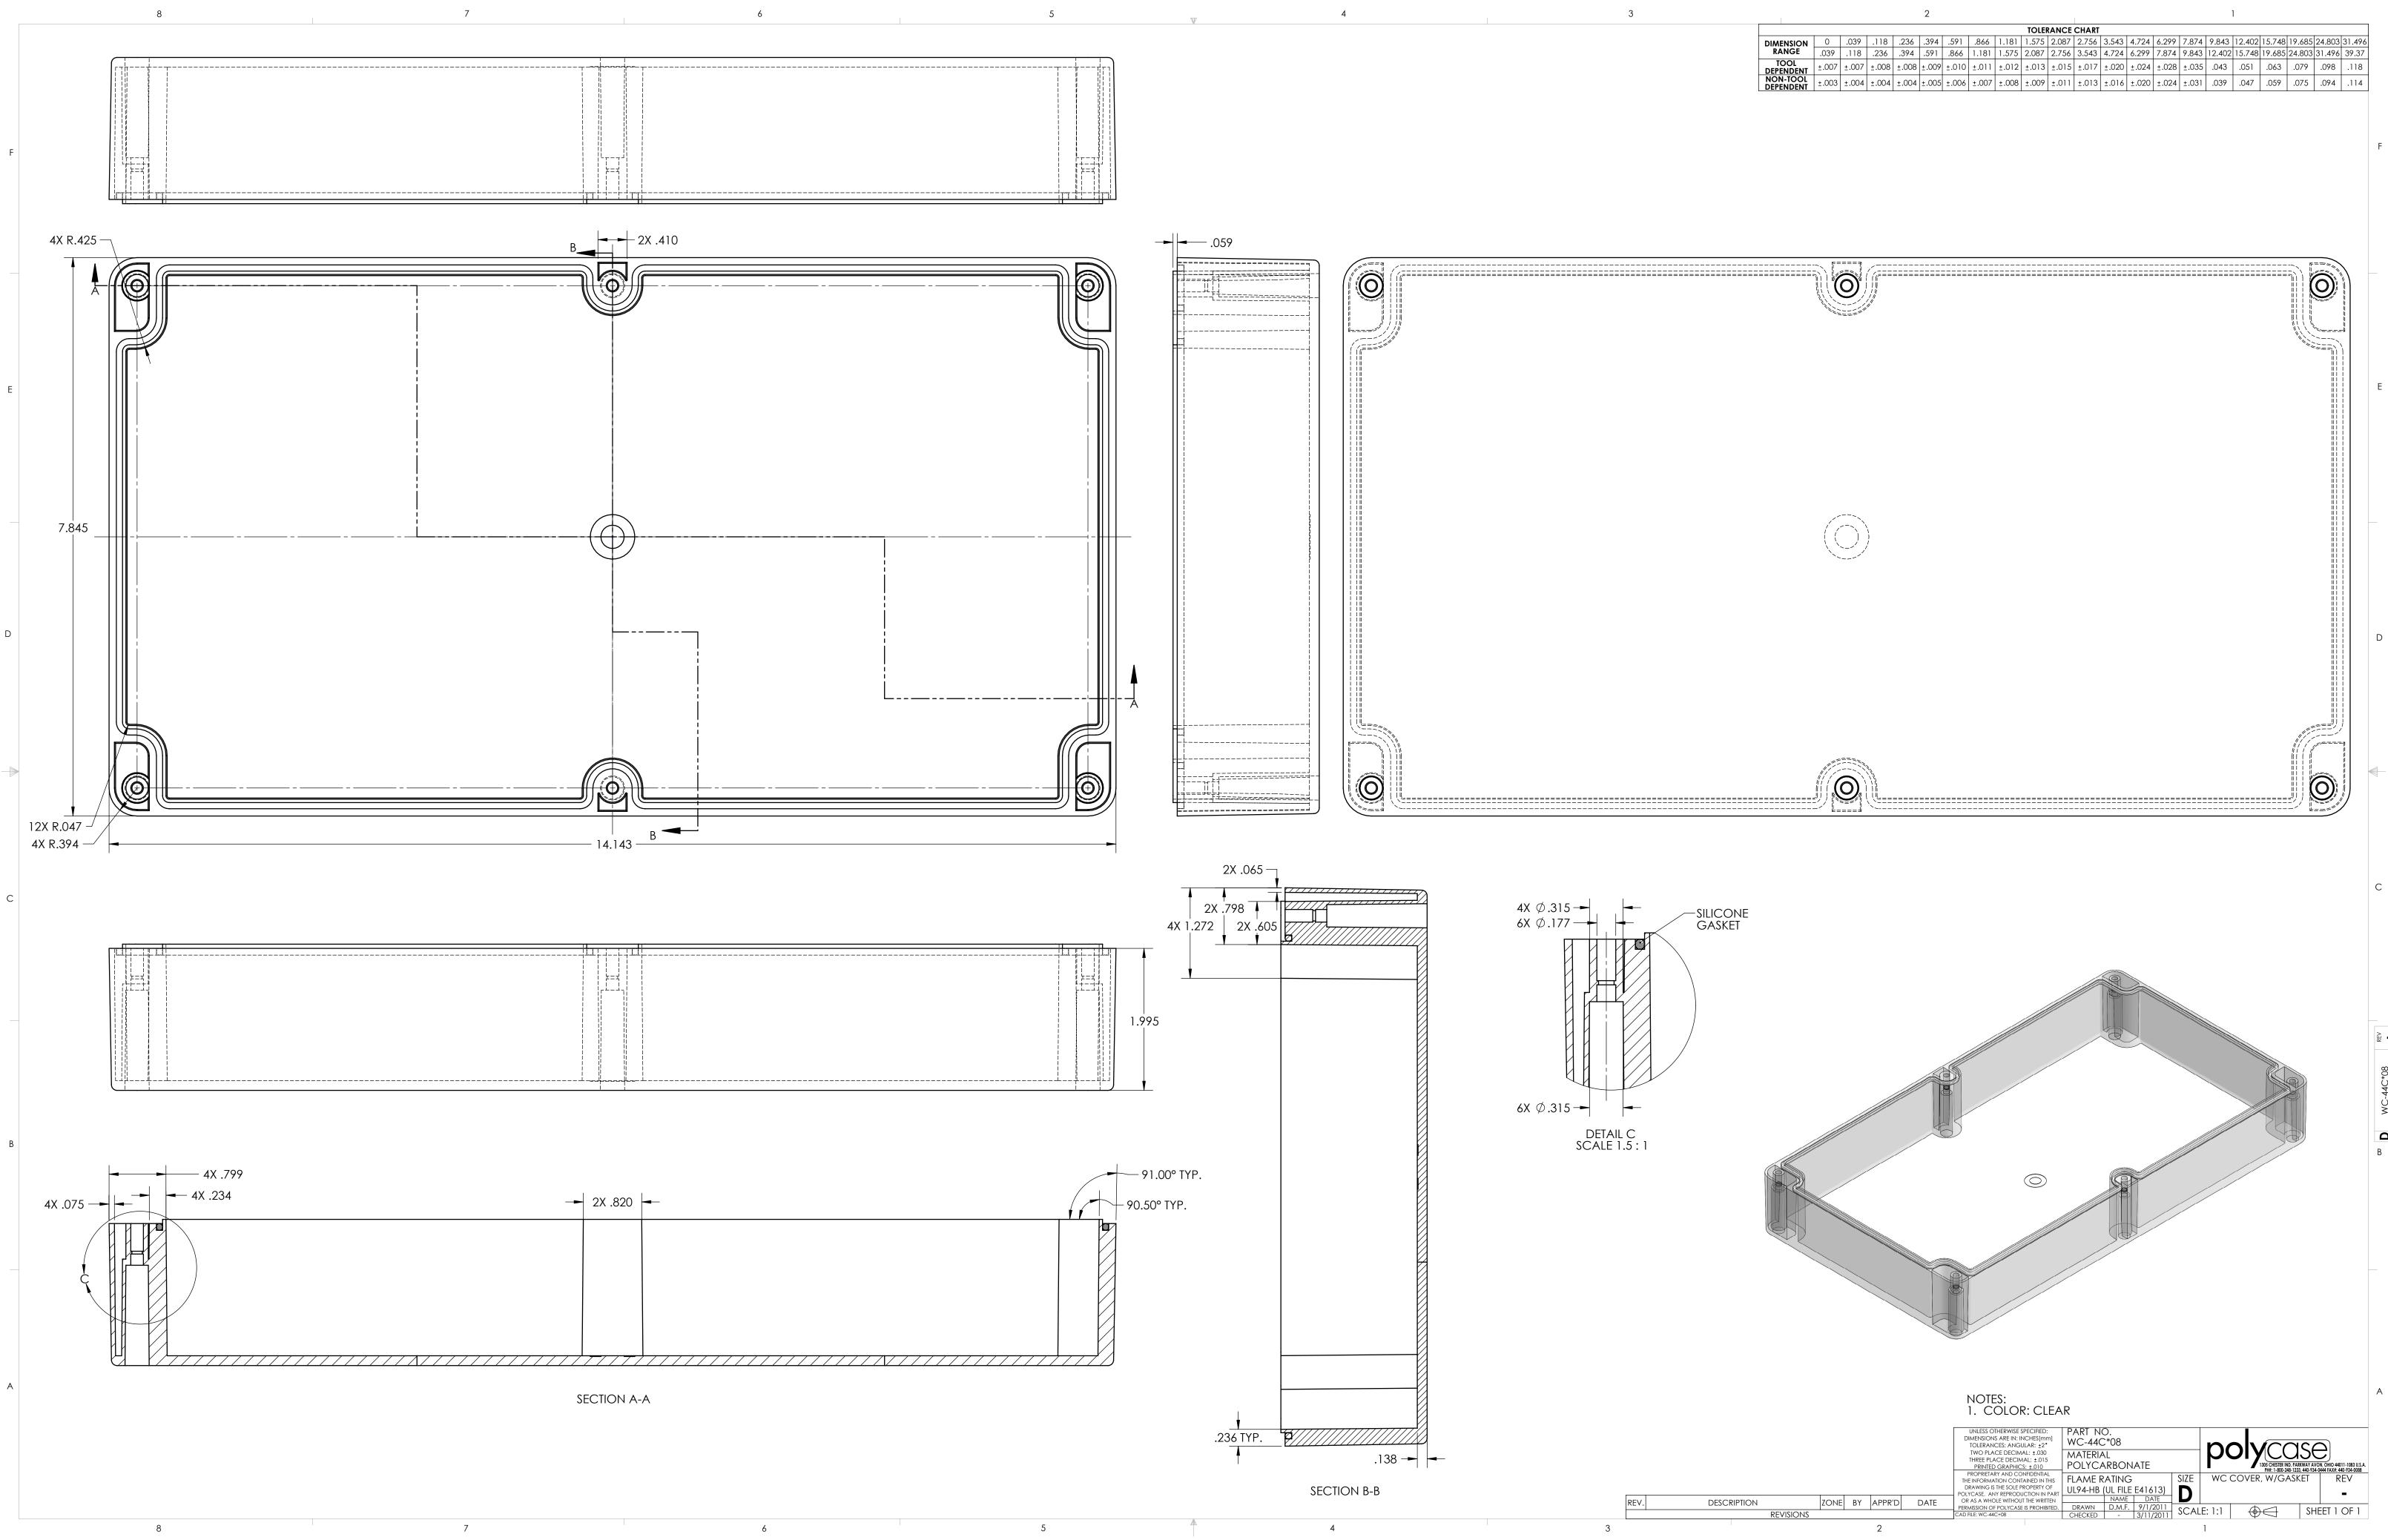

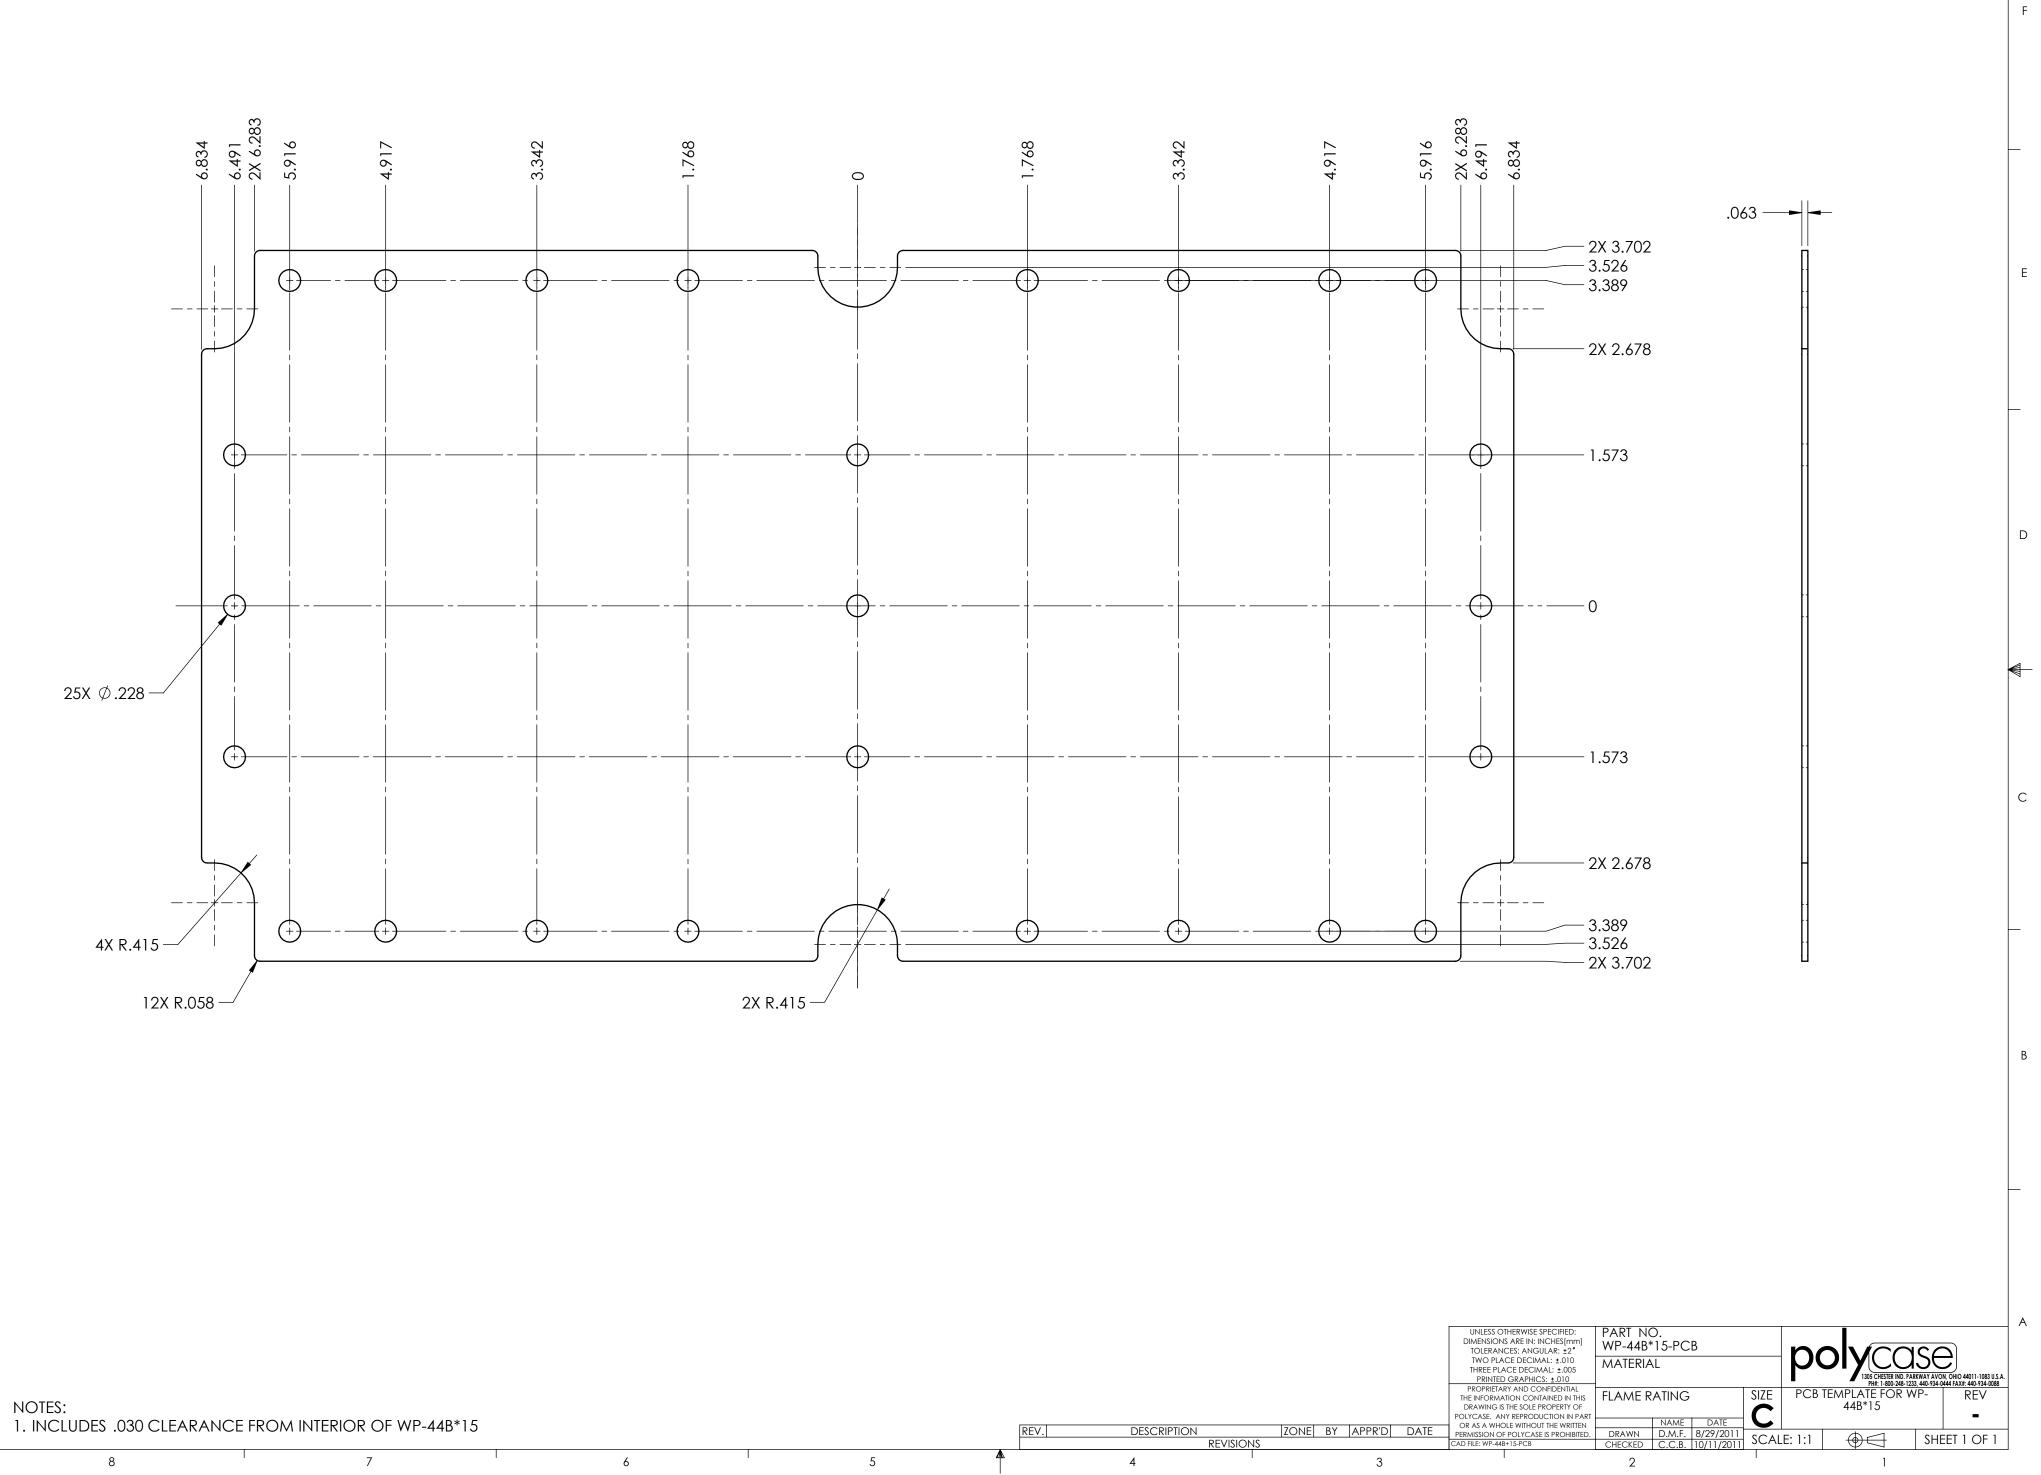

Е

D

С

А

Enable 3D View