

NOTES:
1. ENCLOSURE DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13.
2. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE E194432).
3. SERVICE TEMPERATURE: -40°C TO 120°C
4. MOUNTING FLANGE KITS ARE AVAILABLE FROM POLYCASE.

3.1	SCREWS-SSM4-20	M4X0.7 X 20mm OAL, PHILLIPS DRIVE MACHINE SCREW	STAINLESS STEEL			6
3	SCREWS-SSM4-20-6	ASSEMBLY SCREWS, 6 PACK				1
2	WC-35C*08	WC COVER, W/GASKET	POLYCARBONATE	CLEAR	UL94-HB (UL FILE E41613)	
1	WP-35B*15	WP BASE, W/MOUNTING BOSSES	POLYCARBONATE	LIGHT GRAY	UL94-HB (UL FILE E41613)	
ITEM NO.	PART NUMBER	DESCRIPTION	Material	Color	Flame Rating	QTY.
BOM Table					PI	

REV. DESCRIPTION ZONE BY APPR'D DATE

REVISIONS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: ±2°
TWO PLACE DECIMAL: ±.010
THREE PLACE DECIMAL: ±.005
PRINTED GRAPHICS: ±.010
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: WC-35+1508

REVISIONS

WC-35\*1508


MATERIAL


PART NO.
WC-35\*1508

MATERIAL

SIZE WC UNIT, W/MTG BOSSES, REV
W/GASKET, LIGHT GRAY BASE,
CLEAR COVER

SHEET 1 OF 1

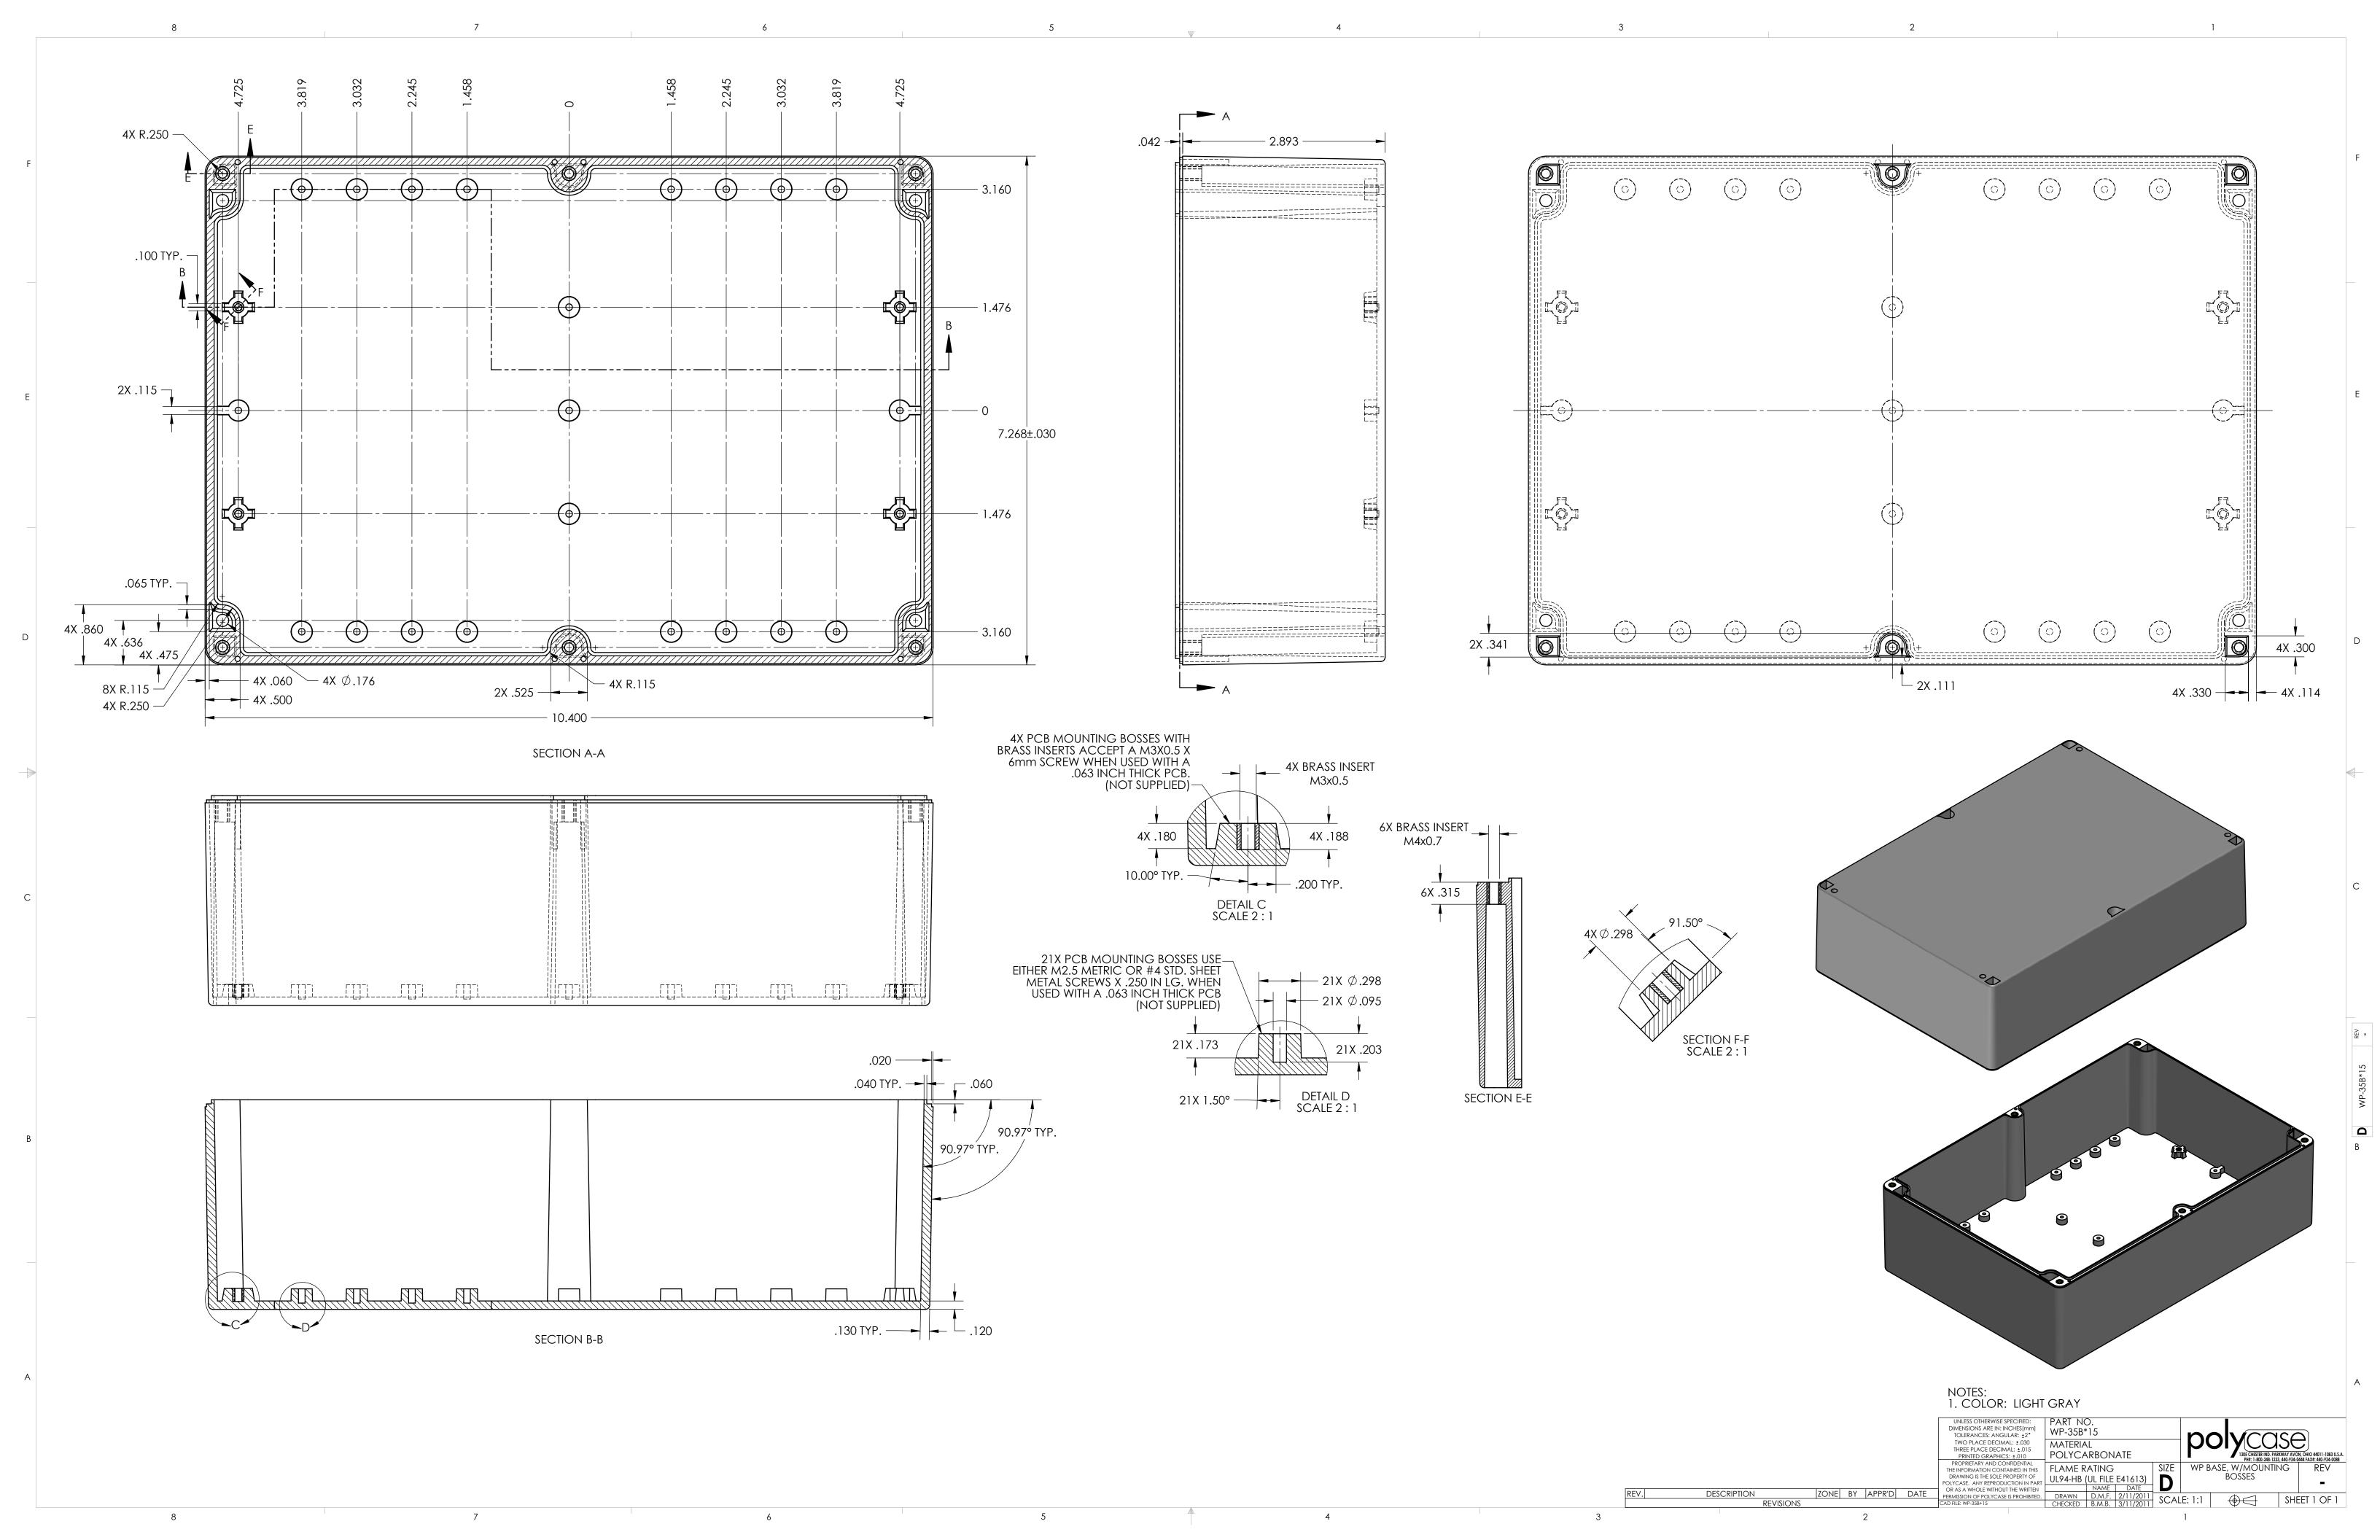

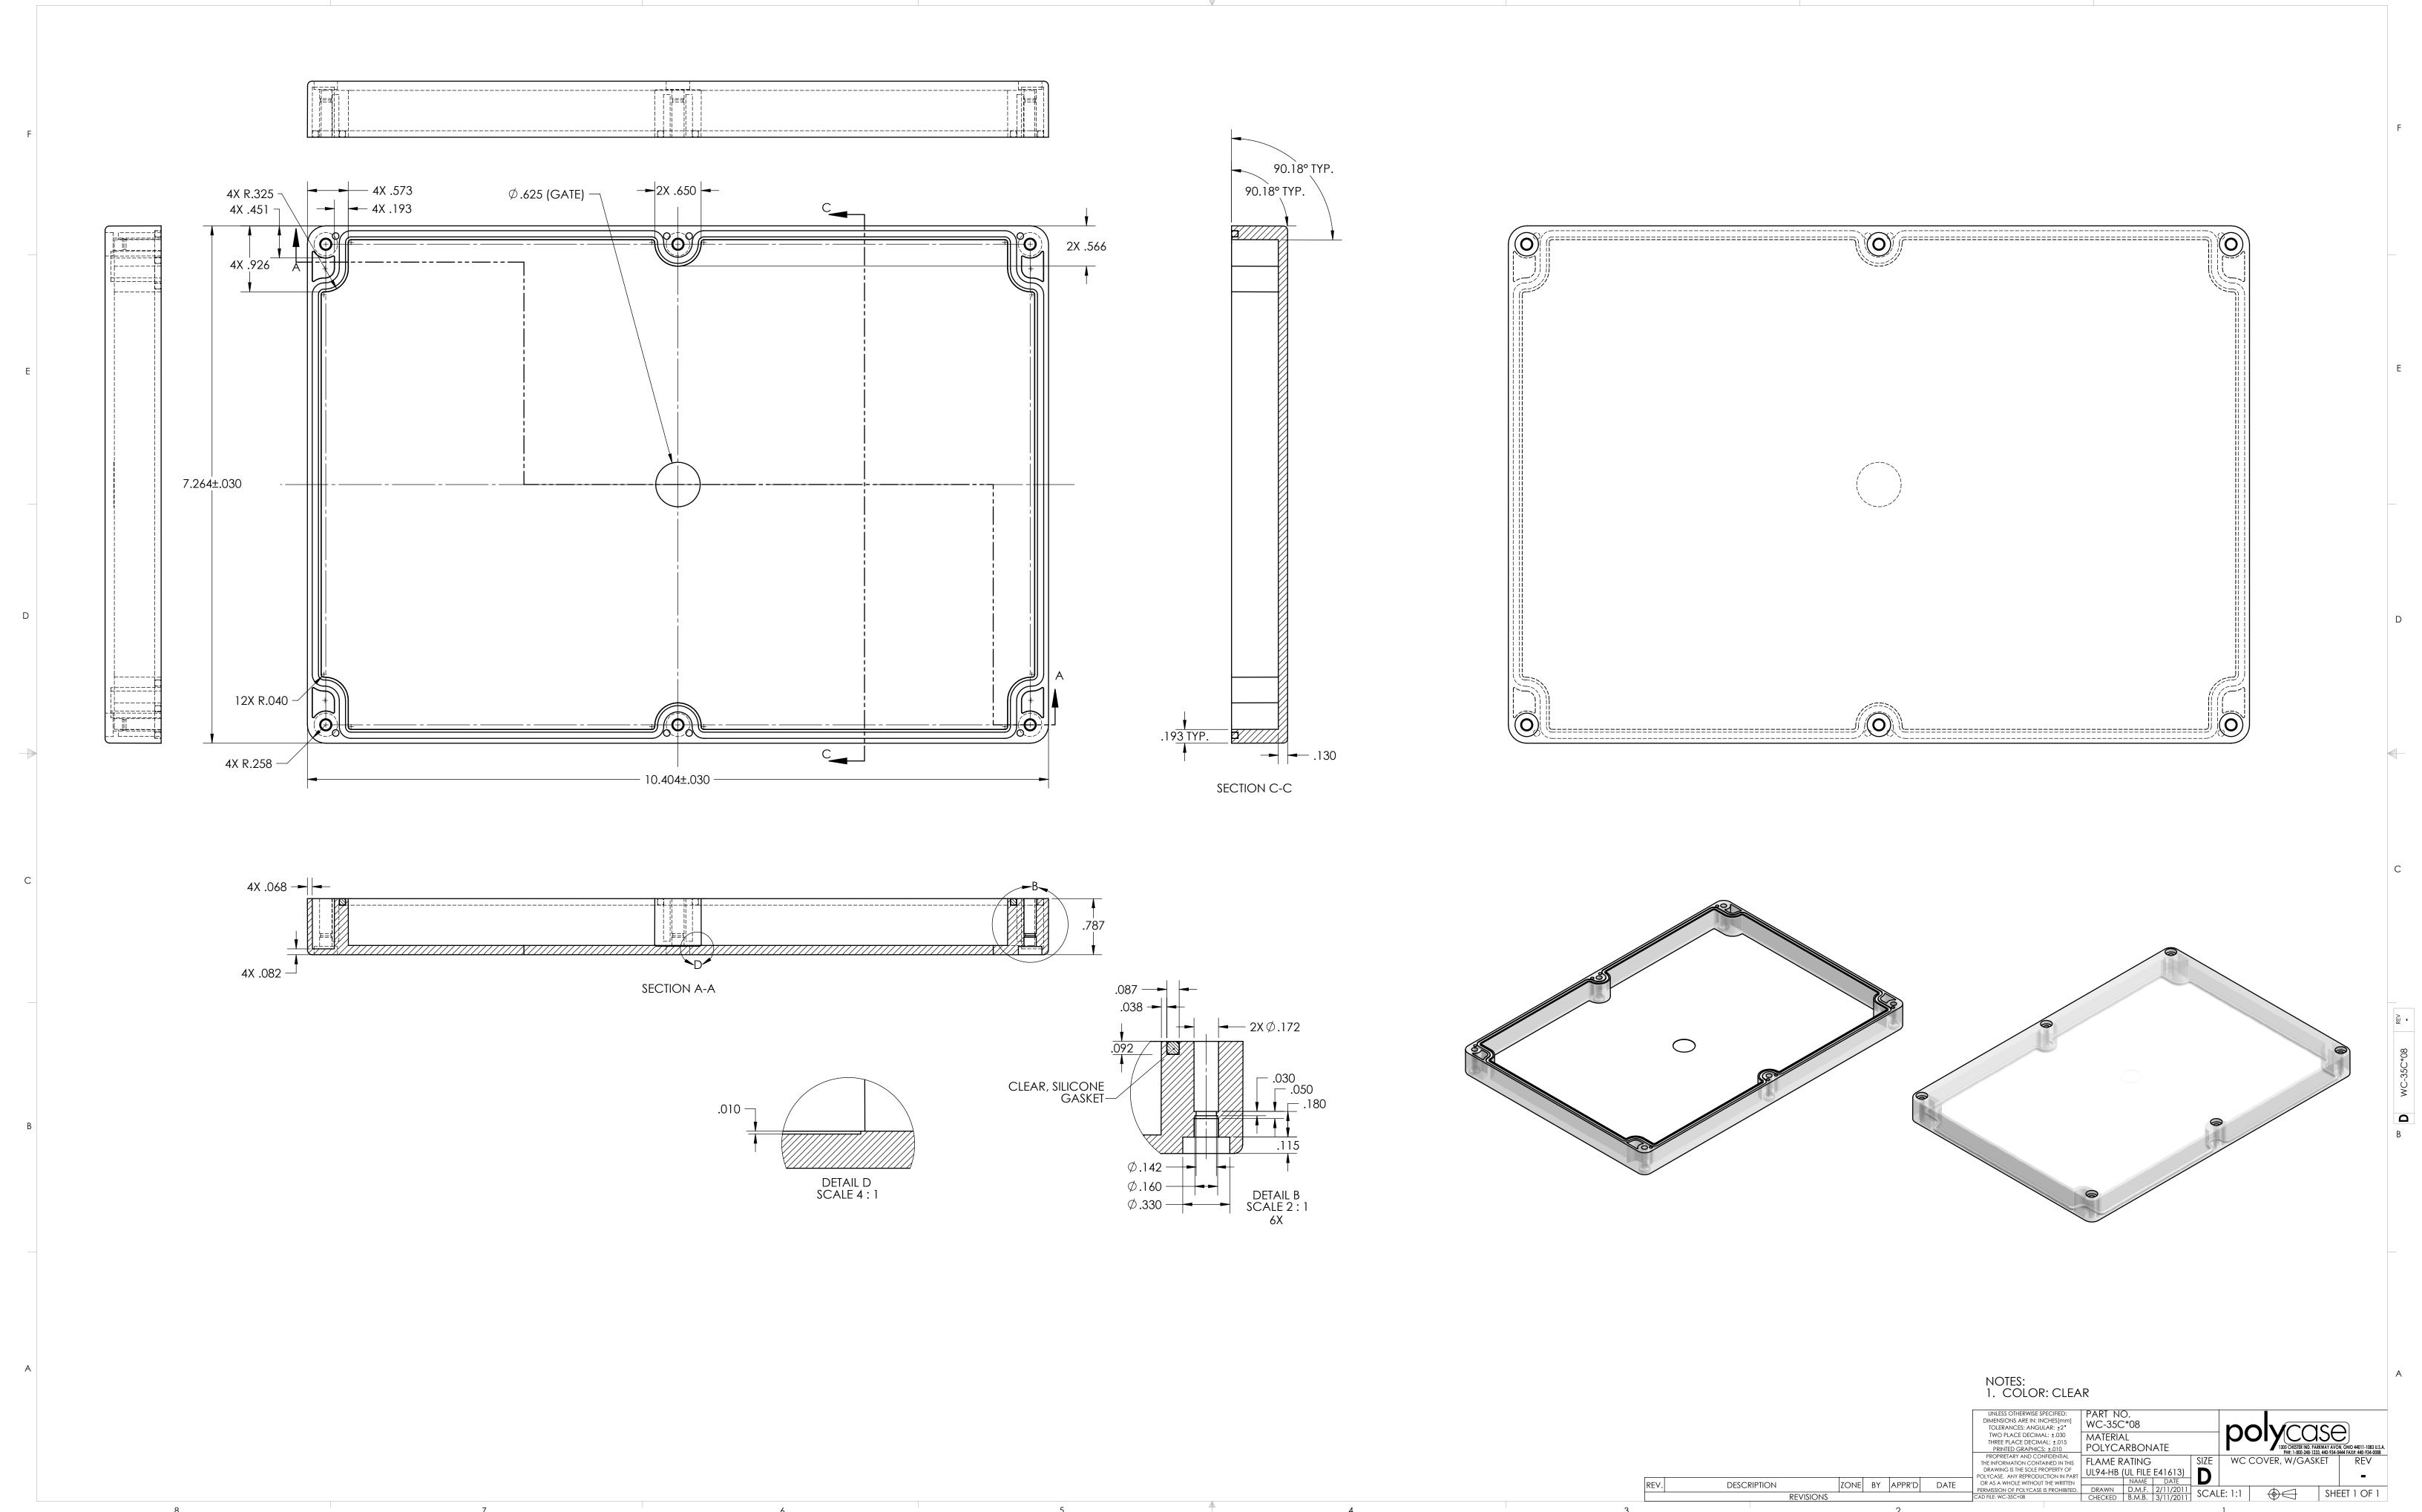

6

8

ZONE BY APPR'D DATE REVISIONS

