
(8.723) <del>(</del> 5.743 )—

(2.176)

(1.938)

SECTION A-A

BOM Table ITEM NO. PART NUMBER Description Material FlameRating Color QTY. WP BASE, W/MOUNTING BOSSES POLYCARBONATE UL94-HB (UL FILE E41613) LIGHT GRAY 1 WP-25B\*15 2 WP-25C\*15 WP COVER ONLY, W/GASKET POLYCARBONATE UL94-HB (UL FILE E41613) LIGHT GRAY ASSEMBLY SCREWS, 6 PACK 3 | SCREWS-SSM4-20-6 M4X0.7 X 20mm OAL, PHILLIPS DRIVE MACHINE SCREW STAINLESS STEEL SCREWS-SSM4-20

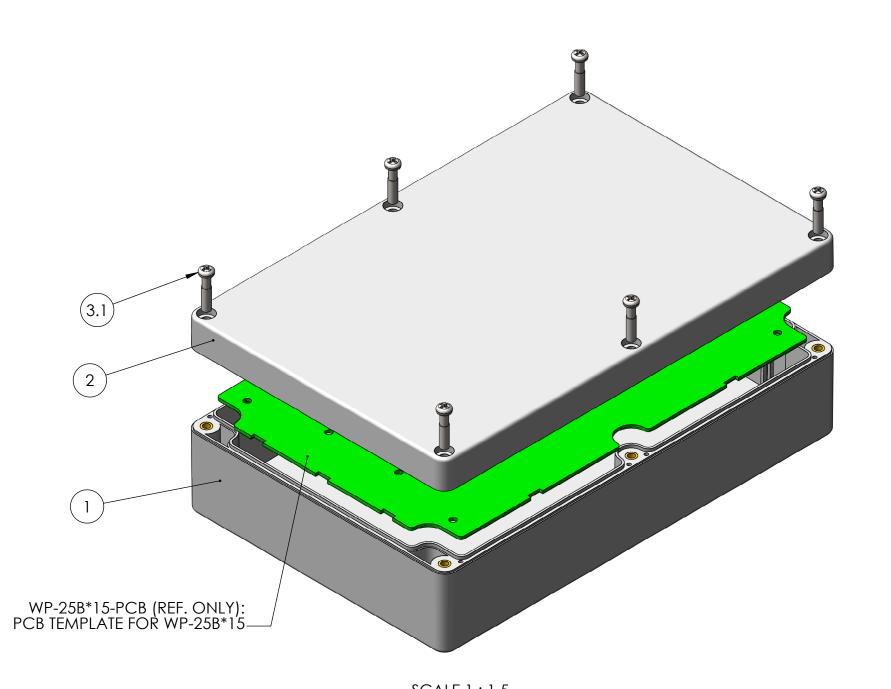

SCALE 1:1.5

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES: ANGULAR: ±2°
TWO PLACE DECIMAL: ±.000
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.

REVISIONS

PART NO.
WP-25\*15

MATERIAL

FLAME RATING
UL94-HB
UL94-HB
DATE

NAME
DATE

NAME
DATE

CAD FILE: WP-25+15

CAD FILE: WP-25+15

CHECKED

C.C.B. 8/9/2011 POSSES WITH GASKET LIGHT

NOTES:
1. SERVICE TEMPERATURE RANGE: -40°C TO 120°C
2. DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13
3. MOUNTING FLANGE KITS ARE AVAILABLE FROM POLYCASE.
4. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE #E194432).

BOSSES, WITH GASKET, LIGHT GRAY SCALE: 1:1 SHEET 1 OF 1

