


— 21X PCB MOUNTING BOSSES USE EITHER M2.5 METRIC OR #4 STD. SHEET METAL SCREWS X .250 IN LG. WHEN USED WITH A .063 INCH THICK PCB (NOT SUPPLIED)

4X PCB MOUNTING BOSSSES WITH BRASS INSERTS ACCEPT A M3X0.5 X 6mm SCREW WHEN USED WITH A .063 INCH THICK PCB.
(NOT SUPPLIED)

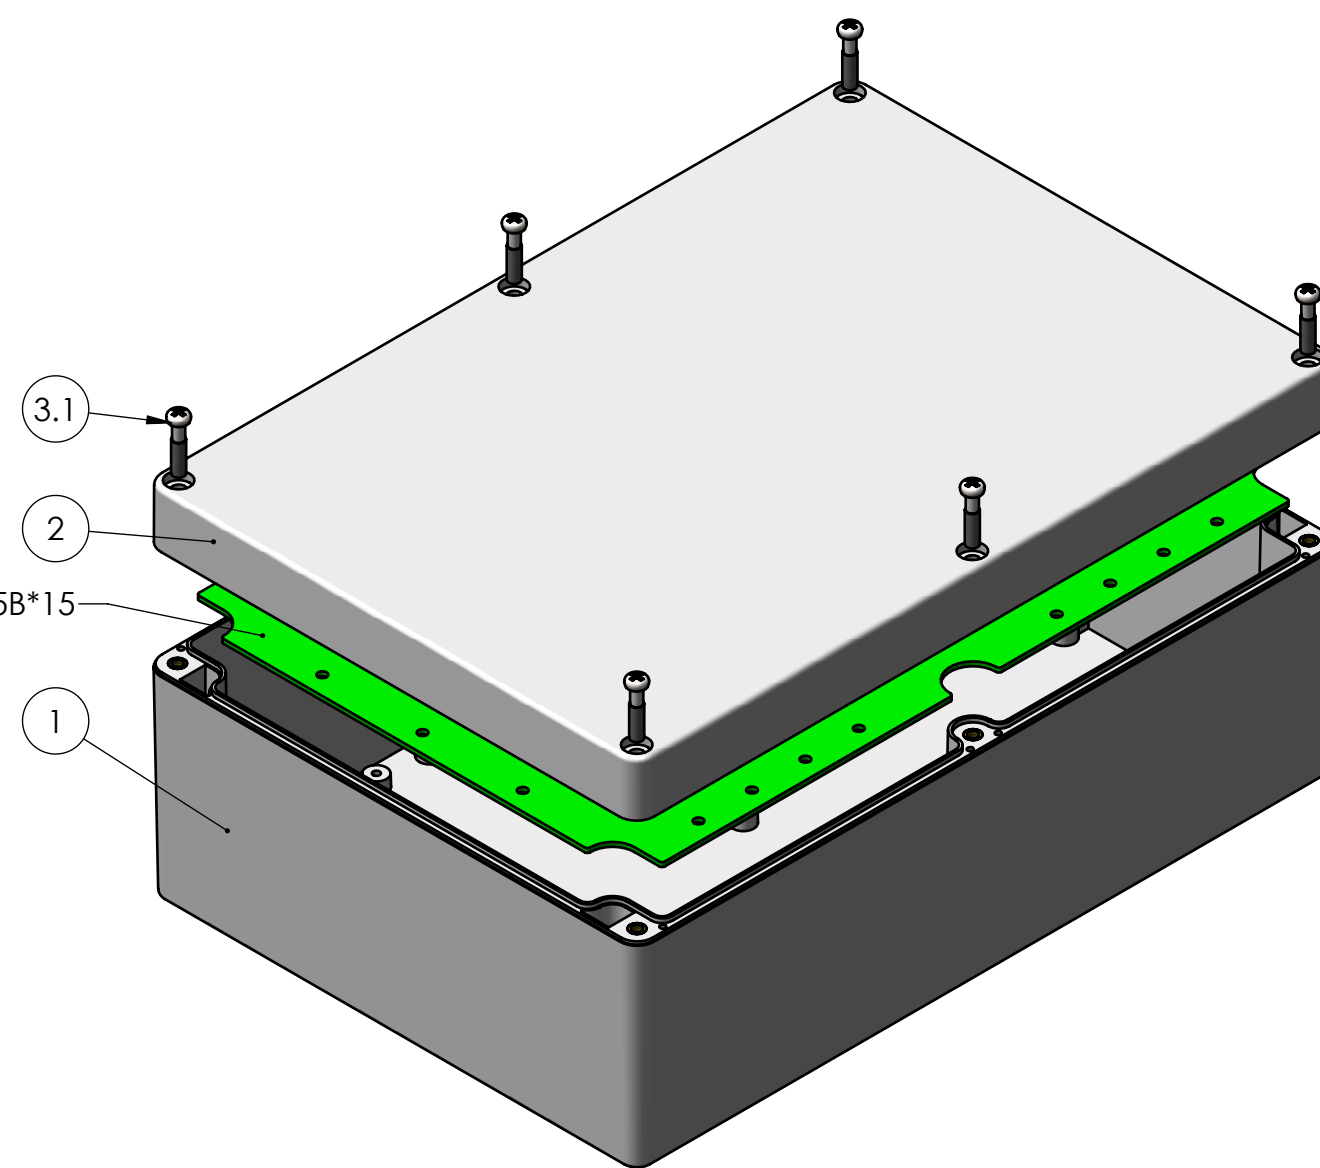

WP-35B*15-PCB: PCB TEMPLATE FOR WP-35B*15

NOTES:


1. ENCLOSURE DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13.
2. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE E194432).
3. SERVICE TEMPERATURE: -40°C TO 120°C
4. MOUNTING FLANGE KITS ARE AVAILABLE FROM POLYCASE

3.1	SCREWS-SSM4-20	M4X0.7 X 20mm OAL, PHILLIPS DRIVE MACHINE SCREW	STAINLESS STEEL			6
3	SCREWS-SSM4-20-6	ASSEMBLY SCREWS, 6 PACK				1
2	WP-35C*15	WP COVER ONLY, W/GASKET	POLYCARBONATE	LIGHT GRAY	UL94-HB (UL FILE E41613)	1
1	WP-35H*15	WP BASE, W/MOUNTING BOSSES	POLYCARBONATE	LIGHT GRAY	UL94-HB (UL FILE E41613)	1
ITEM NO.	PART NUMBER	DESCRIPTION	Material	Color	Flame Rating	QTY

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES(mm)
TOLERANCES: ANGULAR: $\pm 2^\circ$
TWO PLACE DECIMAL: $\pm .010$
THREE PLACE DECIMAL: $\pm .005$
PRINTED GRAPHICS: $\pm .010$
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCE. ANY REPRODUCTION IN WHOLE
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCE IS PROHIBITED.

CAD FILE: WP-35+15

[illegible]

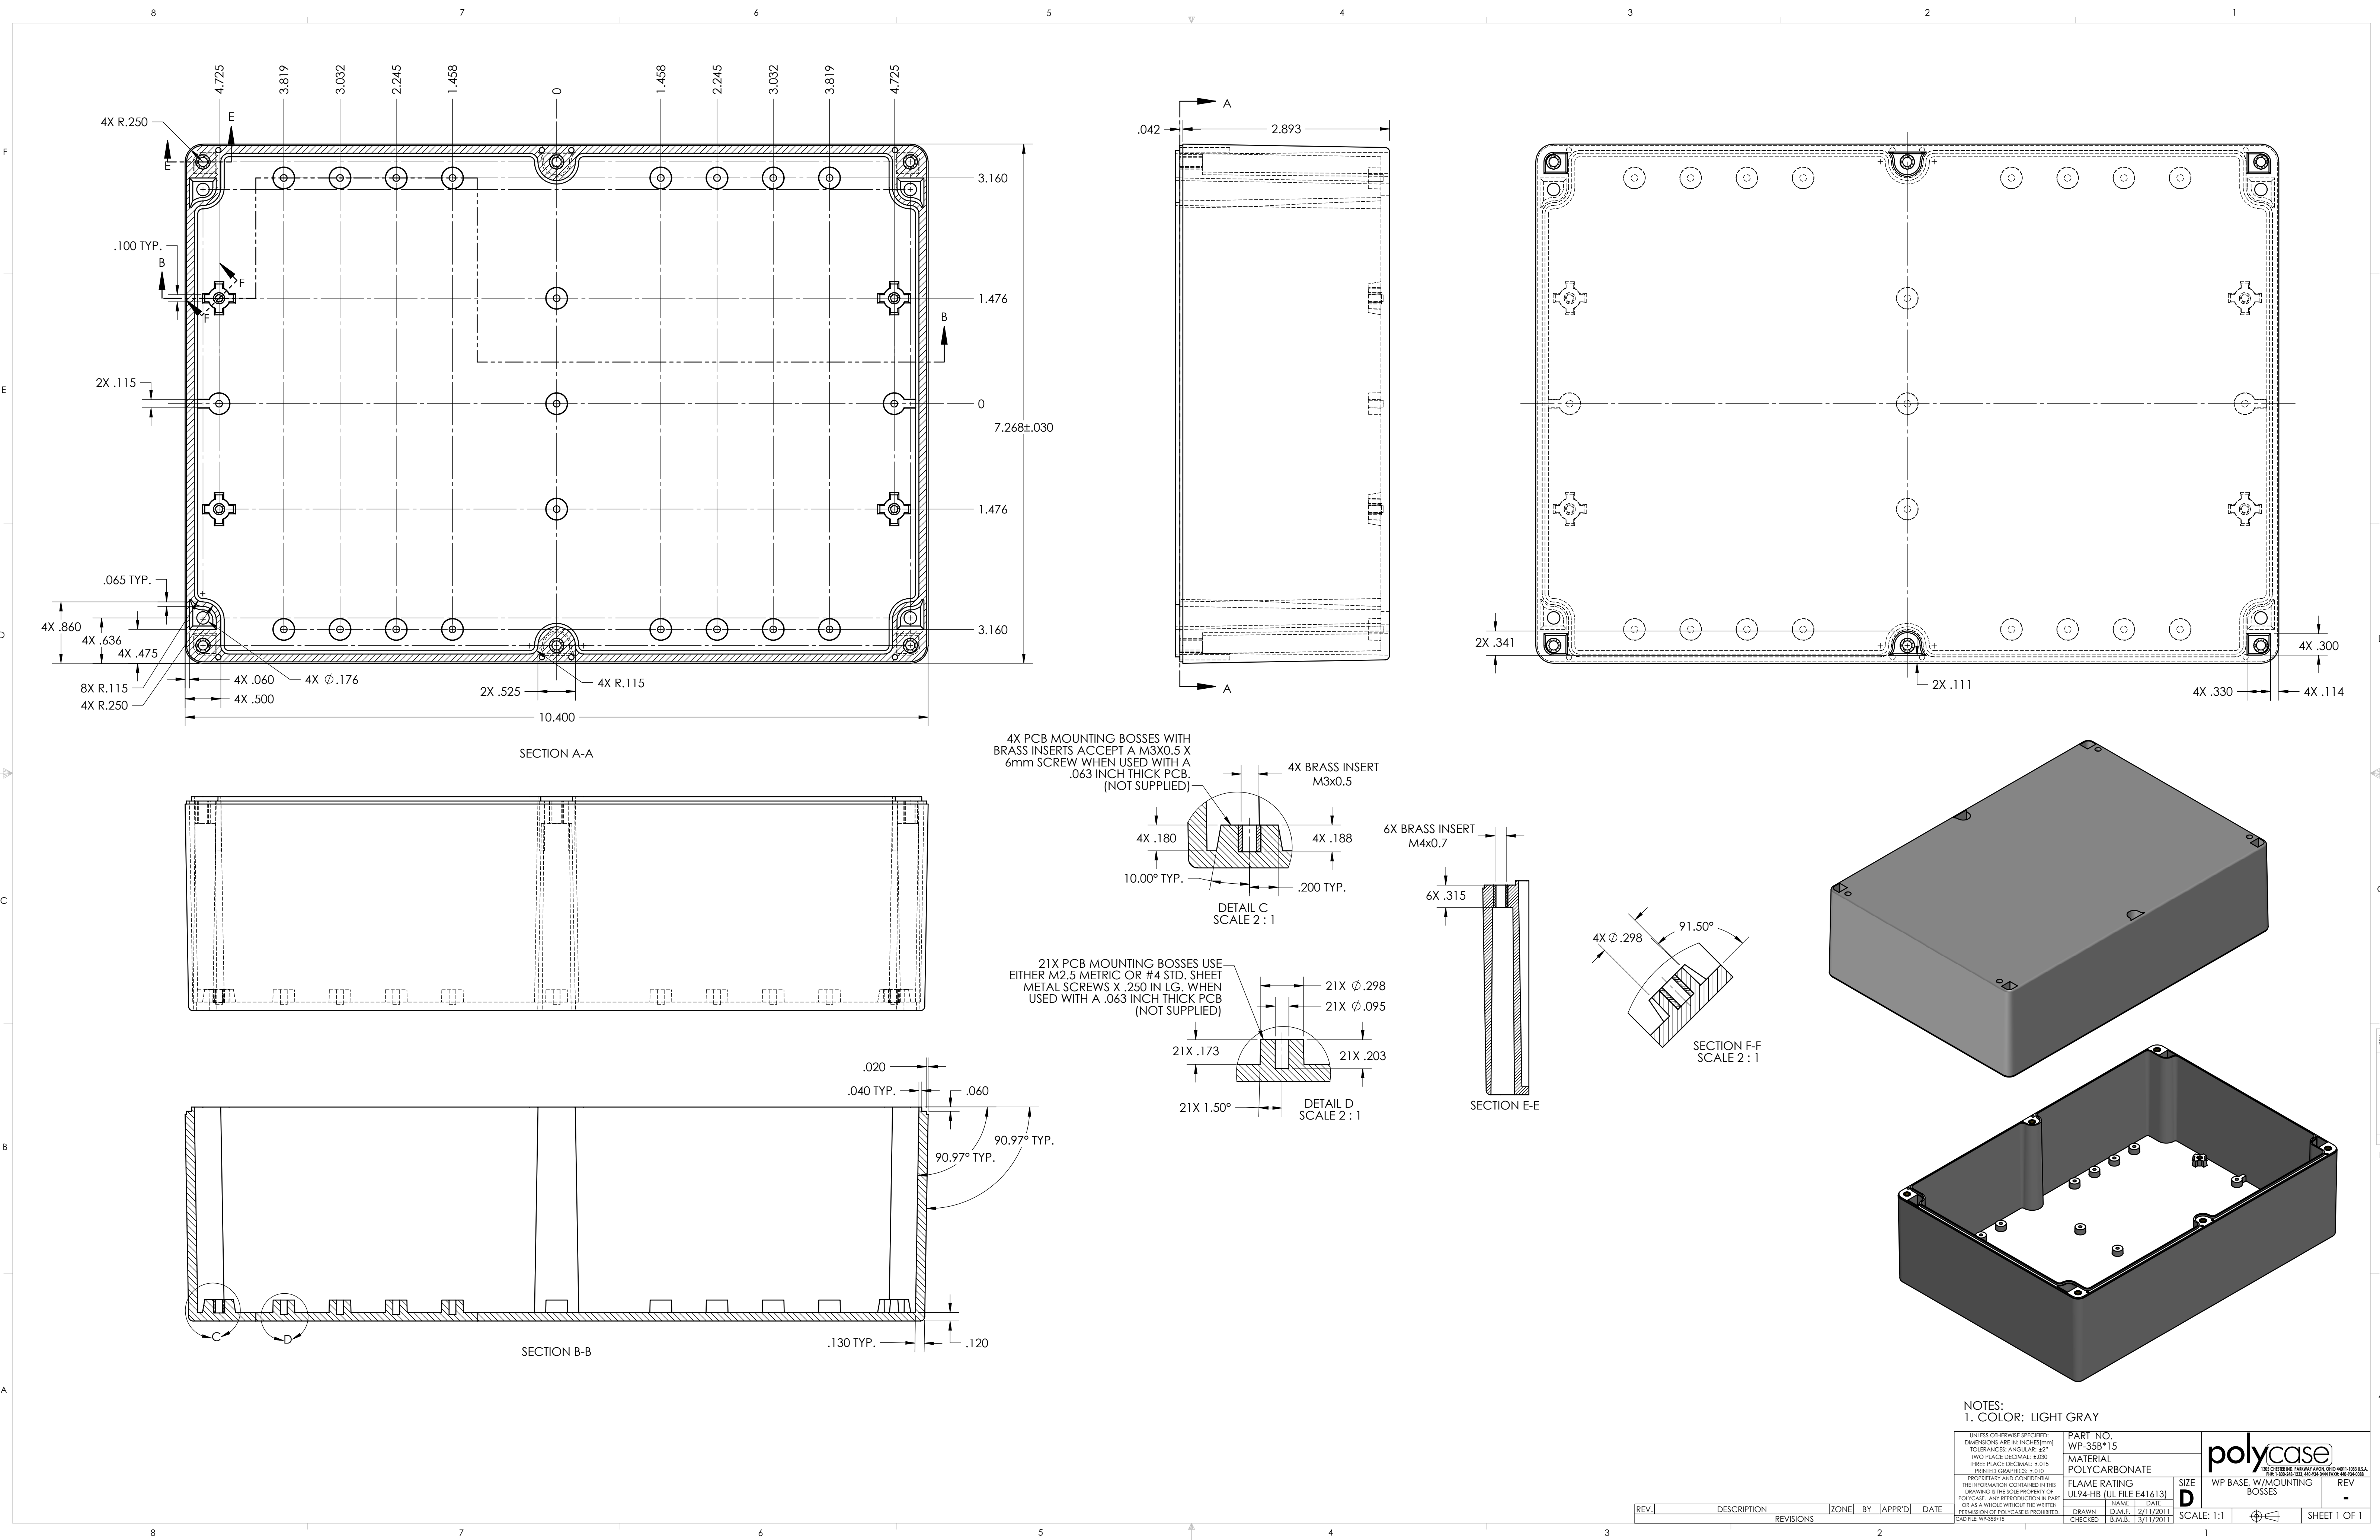


NOTES:
1. COLOR: LIGHT GRAY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: ANGULAR: 22° TWO PLACE DECIMAL: ±.030 THREE PLACE DECIMAL: ±.015 PRINTED GRAPHICS: 1:1015				PART NO. WP-35B*15		MATERIAL POLYCARBONATE		FLAME RATING UL94-HB (UL FILE E41613)		SIZE D		SCALE: 1:1		SHEET 1 OF 1	
PROPERTY AND CONFIDENTIALITY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CADD FILE: WP-35B-15				REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE	DRAWN D.M.F.	DATE 2/11/2011	CHECKED B.M.B.	DATE 3/11/2011		
				REVISIONS											


polycase


WP BASE, W/MOUNTING BOSSSES

REV

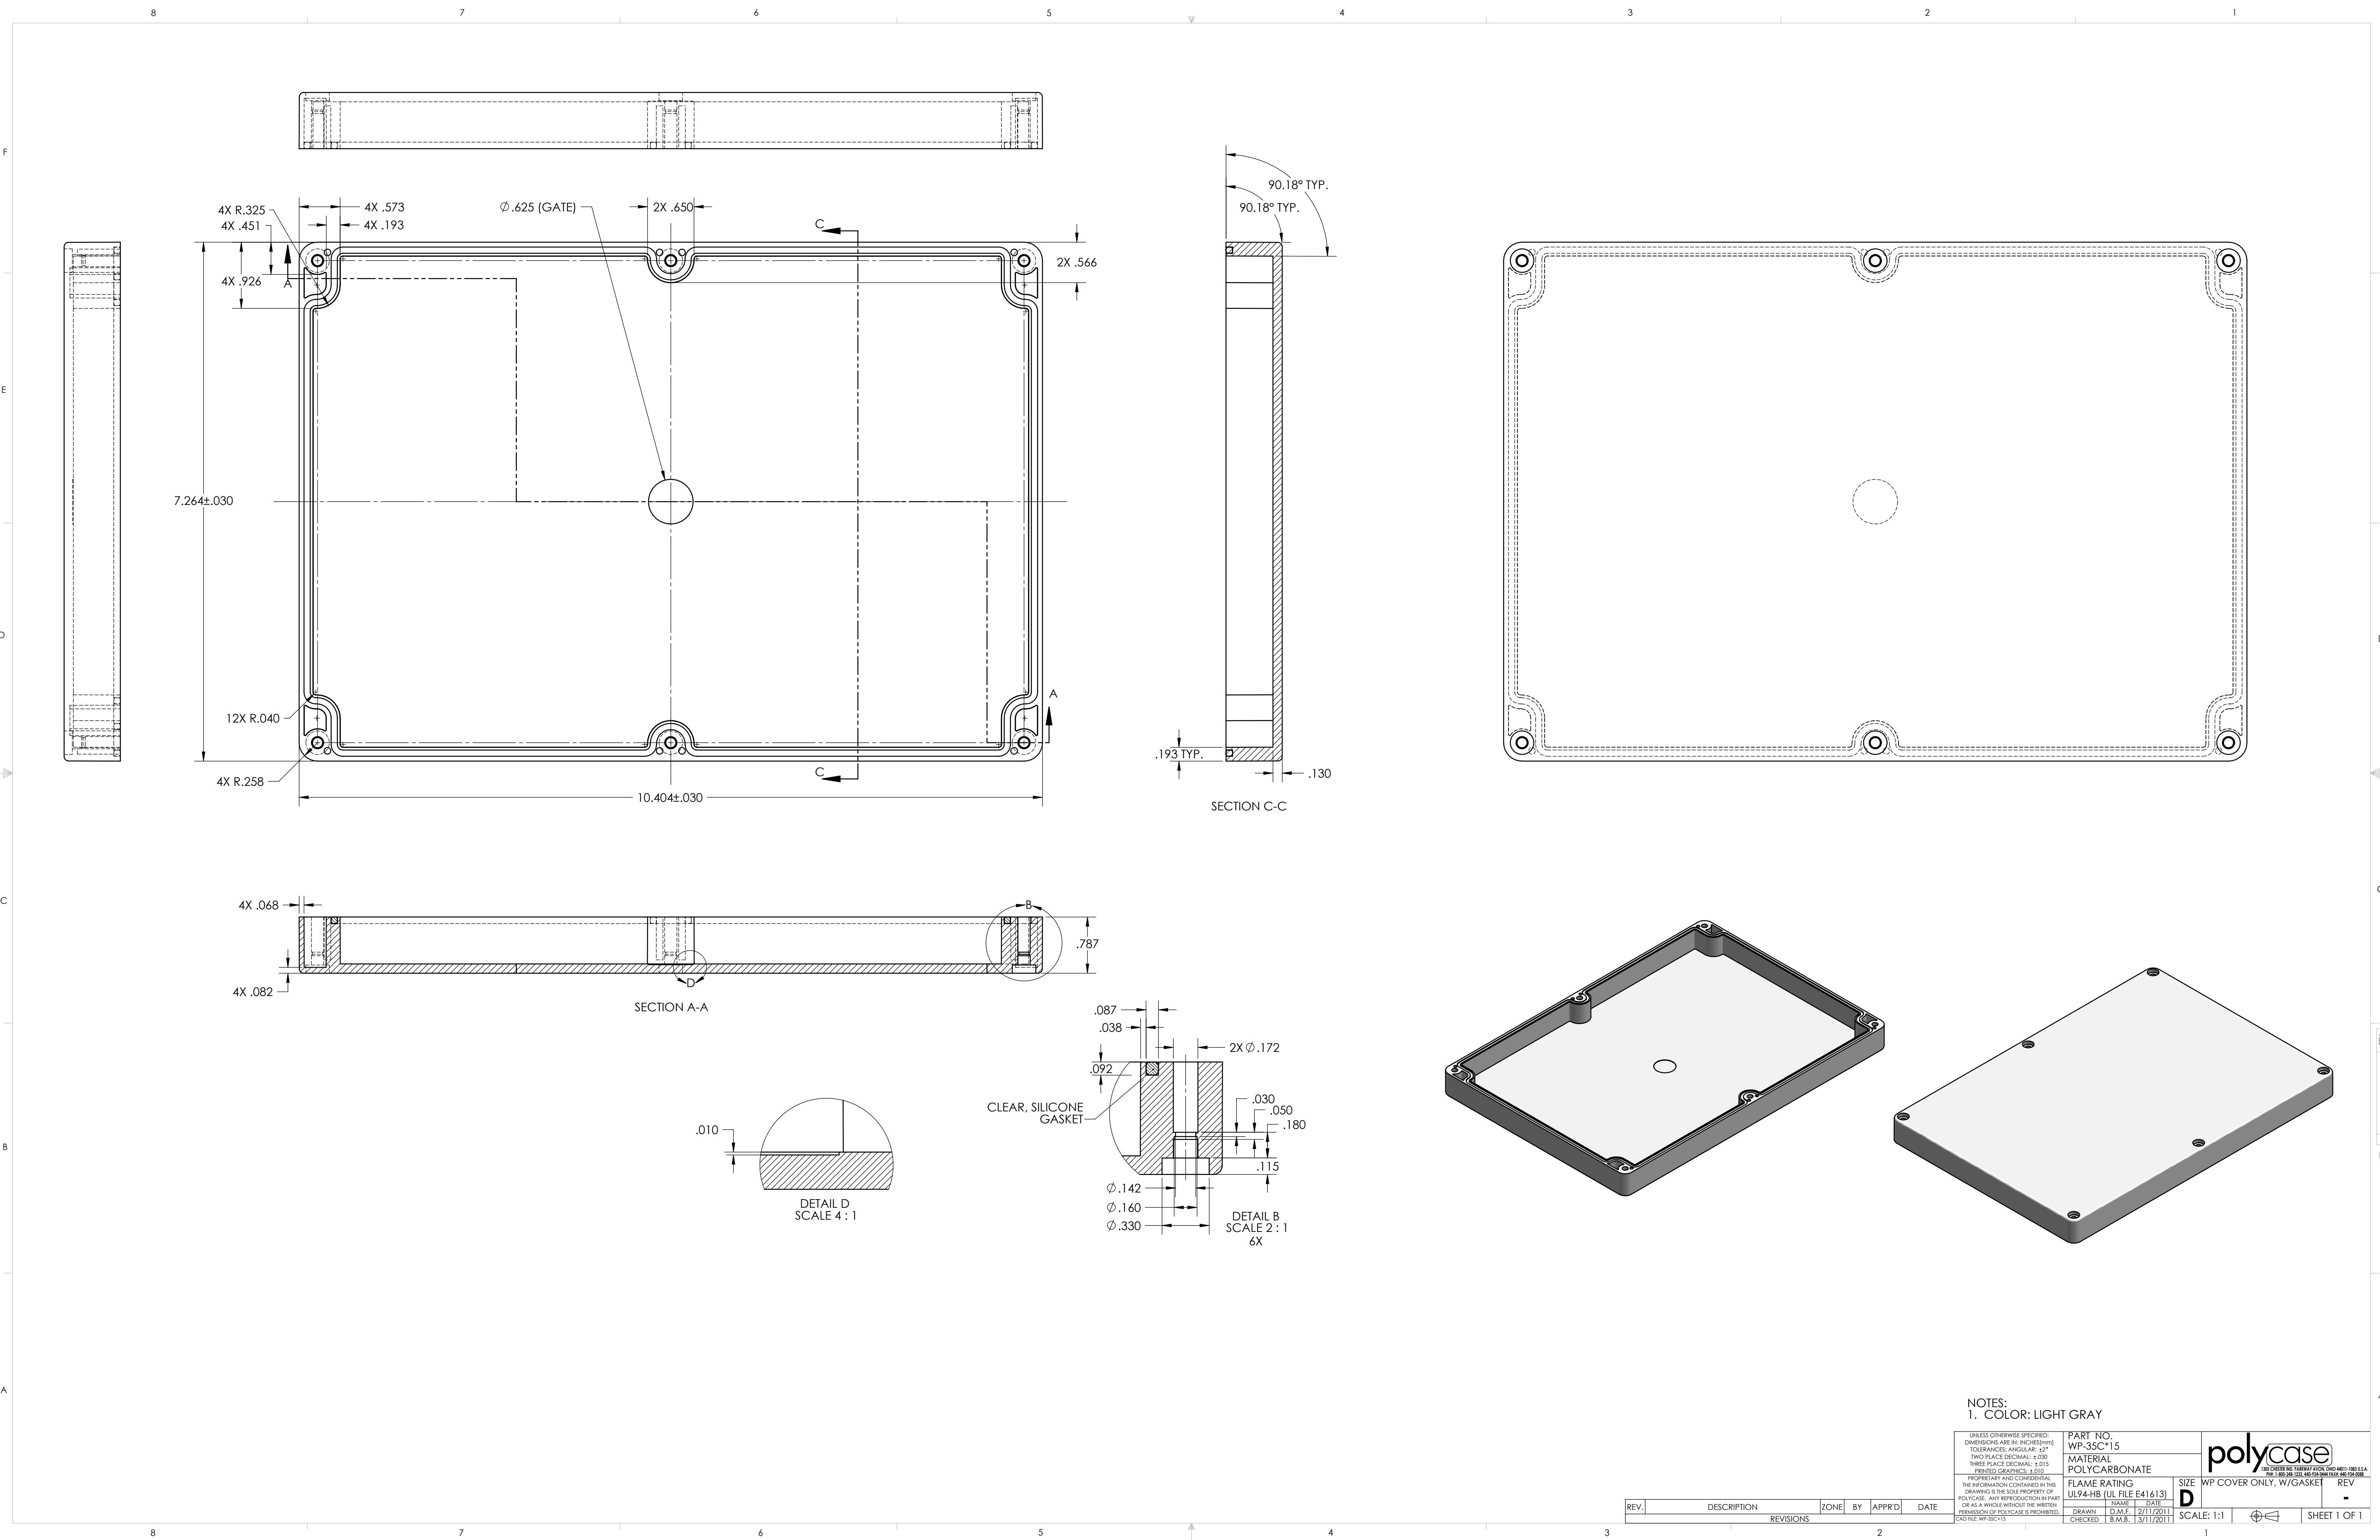

NOTES:
1. COLOR: LIGHT GRAY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES(MM) TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±.030 THREE PLACE DECIMAL: ±.015 PRINTED GRAPHICS: ±.010		PART NO. WP-35C*15		polycase <small>POLYCARBONATE TECHNOLOGY, INC. 20400 140TH AVE. SUITE 100 P.O. BOX 200, LEBANON, OHIO 44530-0200 TEL: 330.260.1233 FAX: 330.260.7438 AOL: 330.260.1233</small>	
PROPERTY AND CONFIDENTIALITY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CADD FILE: WP-35C*15		MATERIAL POLYCARBONATE			
FLAME RATING UL94-HB (UL FILE E41613)		SIZE		WP COVER ONLY, W/GASKET REV	
DRAWN: D.M.F. 2/11/2011		DATE		3/11/2011	
CHECKED: B.M.B. 3/11/2011		SCALE: 1:1		 SHEET 1 OF 1	

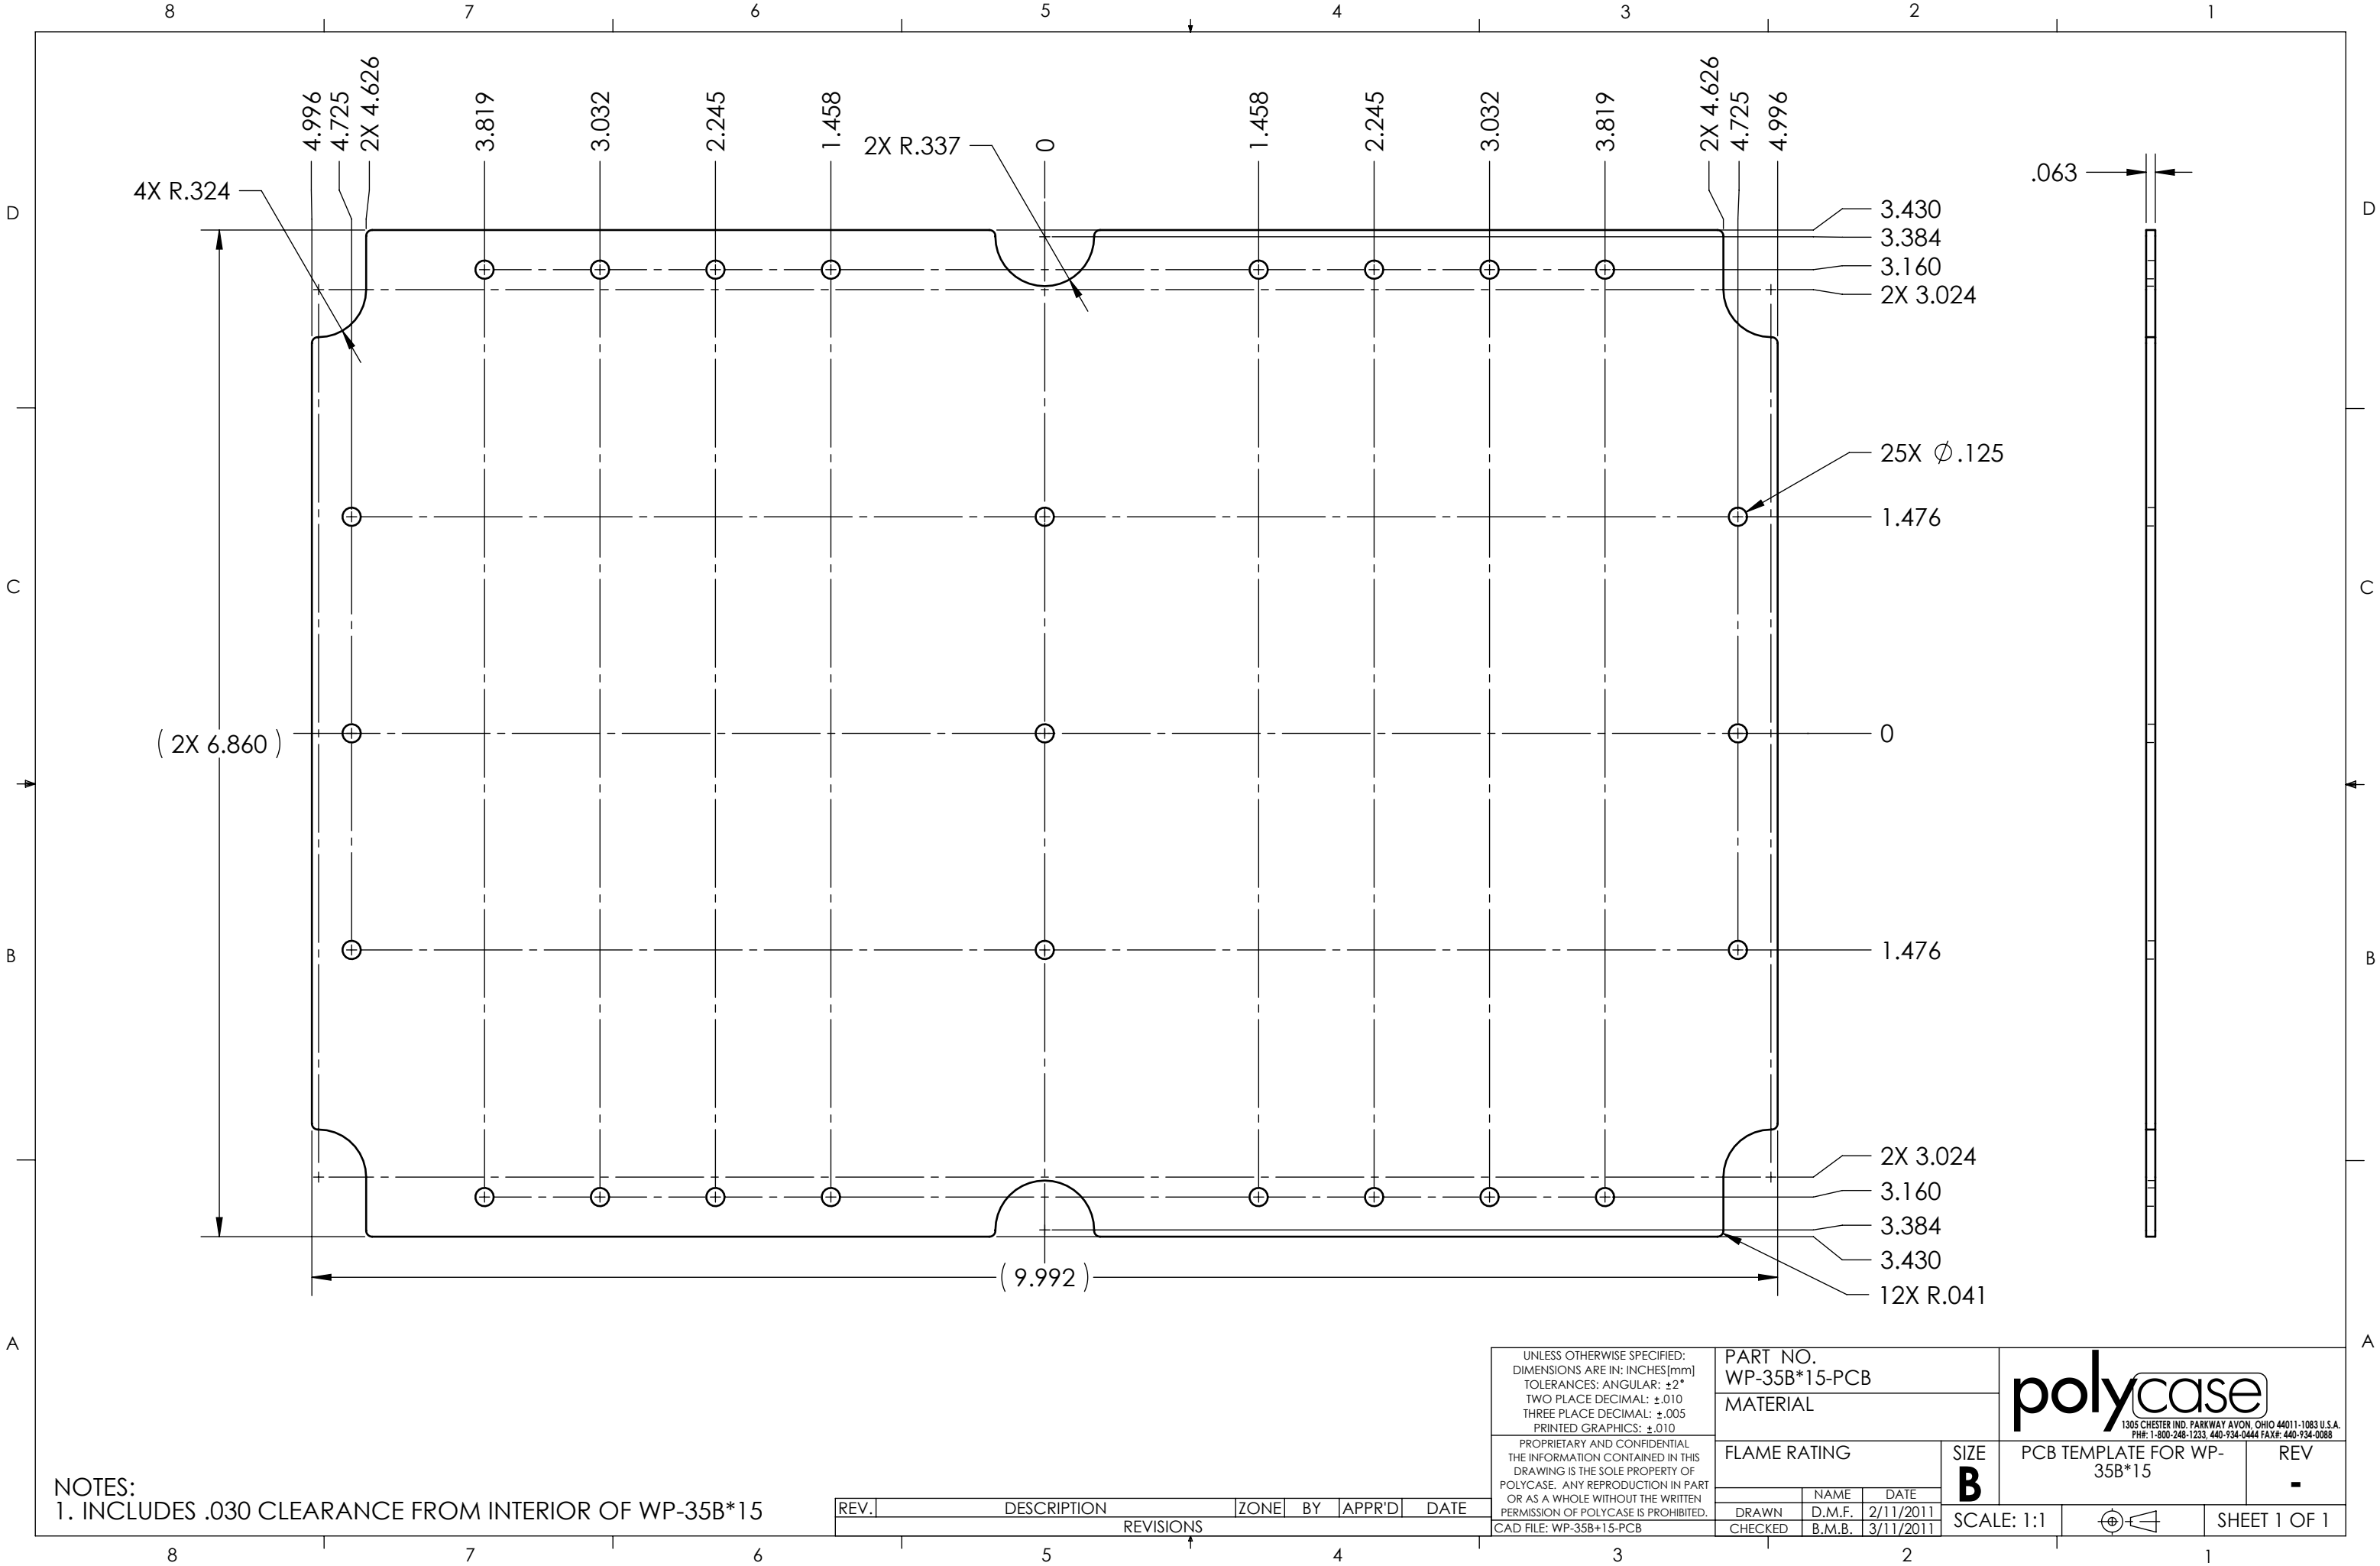

NOTES:
1. INCLUDES .030 CLEARANCE FROM INTERIOR OF WP-35B*15

REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE
REVISIONS					

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES[mm] TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±.010 THREE PLACE DECIMAL: ±.005 PRINTED GRAPHICS: ±.010		PART NO. WP-35B*15-PCB		<div><div>polycase</div><div>1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A. PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088</div></div>			
		MATERIAL					
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: WP-35B*15-PCB		FLAME RATING		SIZE B	PCB TEMPLATE FOR WP- 35B*15		REV -
			NAME	DATE			
		DRAWN	D.M.F.	2/11/2011			
		CHECKED	B.M.B.	3/11/2011	SCALE: 1:1		