




SCALE 1 : 1





SCALE 1 : 1



BOM Table							
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	UA-010/QTY.	UA-010-00/QTY.
1	NUT-M12-01	1		Nylon 6/6	GRAY	1	-
2	UA-010-BODY	1	LIQUID TIGHT THREADED PLUG	NYLON 6/6	GRAY	1	-
3	UA-010-BODY-00	1	LIQUID TIGHT THREADED PLUG	NYLON 6/6	BLACK	-	1
4	NUT-M12-00	1		Nylon 6/6	BLACK	-	1

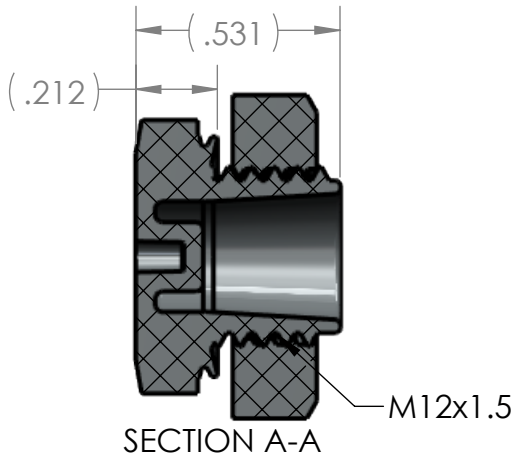

PART NUMBER: UA-010
WEIGHT(lbs): 0.0076

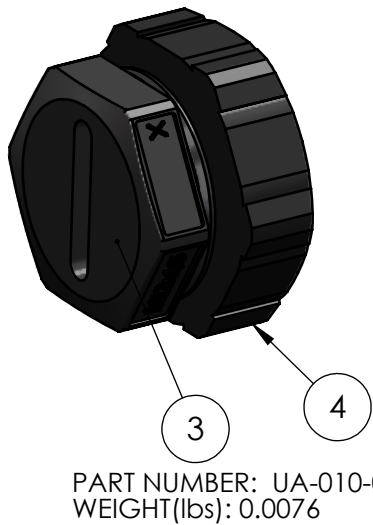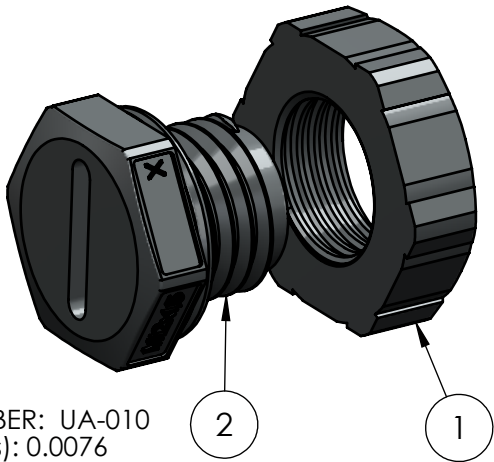

PART NUMBER: UA-010-00
WEIGHT(lbs): 0.0076

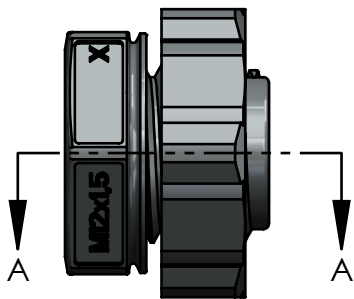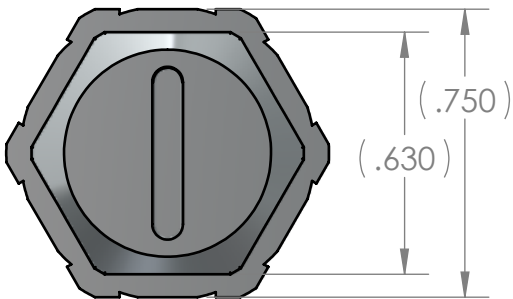

- NOTES:
- TORQUE APPROXIMATELY 20 IN-LBS.
 - CLEARANCE HOLE: $\varnothing$.472 MIN
 - IP RATING IP68 (70 PSI, 5 BAR)
 - TEMPERATURE RANGE: -40°F (-40°C) TO 221°F (105°C)
 - UL RATED FOR TYPE NEMA 3R, 4 AND 4X APPLICATIONS

1	ADDED BLACK VERSION		Douglas French	3/24/2026
0			Douglas French	9/6/2022
REV.	COMMENT	ZONE	REVISED BY	CREATION DATE
REVISIONS				

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES: ANGULAR: $\pm$.°
TWO PLACE DECIMAL: $\pm$.
THREE PLACE DECIMAL: $\pm$.
PRINTED GRAPHICS: $\pm$.
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: UA-010

PART NO. UA-010		
MATERIAL		
FLAME RATING UL94V-2		SIZE B
DRAWN	NAME	DATE
CHECKED	B.M.B.	4/3/2017

1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088

LIQUID TIGHT PLUG W/NUT

REV
1

SCALE: 2:1

SHEET 1 OF 1