

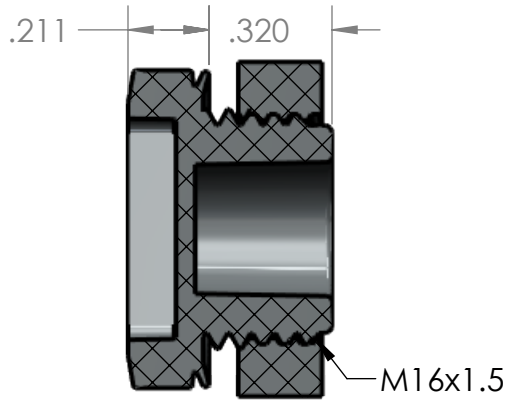
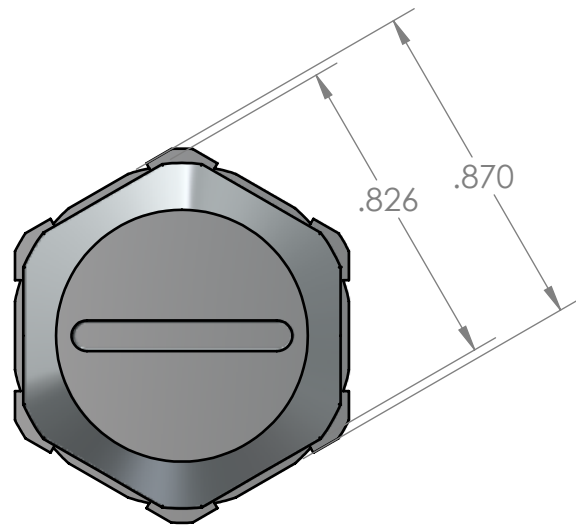



SCALE 1:1 SCALE 1:1

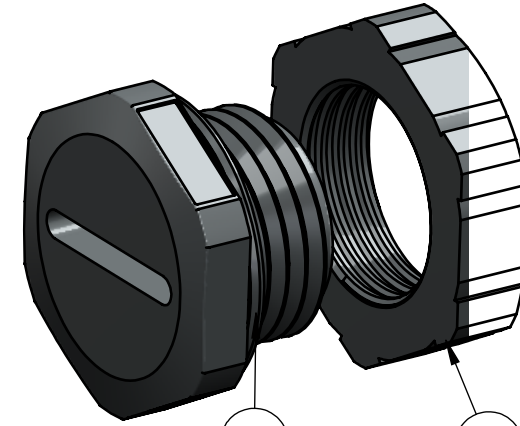

SECTION A-A

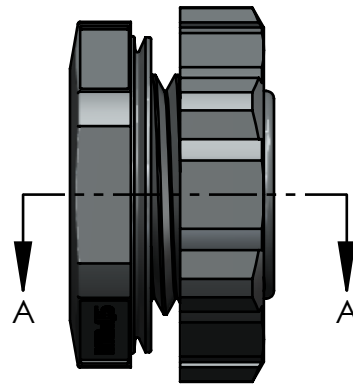

PART NUMBER: UA-011
WEIGHT(lbs): 0.0119

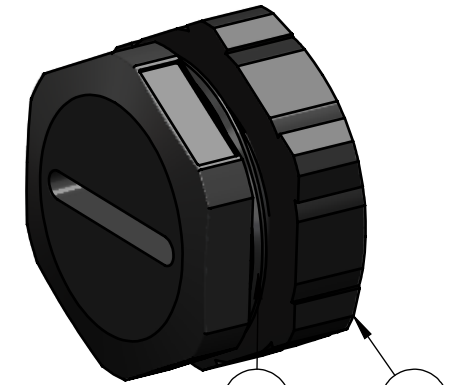

PART NUMBER: UA-011-00
WEIGHT(lbs): 0.0119

BOM Table							
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	UA-011/QTY.	UA-011-00/QTY.
1	UA-011-BODY	1	LIQUID TIGHT THREADED PLUG	NYLON 6/6	GRAY	1	-
2	NUT-M16-01	1	LOCK NUT	Nylon 6/6	GRAY	1	-
3	UA-011-BODY-00	1	LIQUID TIGHT THREADED PLUG	NYLON 6/6	BLACK	-	1
4	NUT-M16-00	1	LOCK NUT	Nylon 6/6	BLACK	-	1

- NOTES:
- TORQUE APPROXIMATELY 38 IN-LBS.
 - CLEARANCE HOLE: $\varnothing .630$ MIN
 - IP RATING IP68 (70 PSI, 5 BAR)
 - TEMPERATURE RANGE: -40°F (-40°C) TO 221°F (105°C)
 - UL RATED FOR TYPE NEMA 3R, 4 AND 4X APPLICATIONS

1	ADDED BLACK VERSION		Douglas French	3/24/2026
0			Douglas French	9/6/2022
REV.	COMMENT	ZONE	REVISED BY	CREATION DATE
REVISIONS				

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES: ANGULAR: $\pm .5^{\circ}$
TWO PLACE DECIMAL: $\pm .01$
THREE PLACE DECIMAL: $\pm .001$
PRINTED GRAPHICS: $\pm .001$

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: UA-011

PART NO. UA-011		MATERIAL		FLAME RATING UL94V-2		SIZE B		LIQUID TIGHT PLUG W/NUT		REV 1	
DRAWN		NAME	DATE								
CHECKED	B.M.B.	3/29/2017	4/3/2017	SCALE: 2:1		SHEET 1 OF 1					