




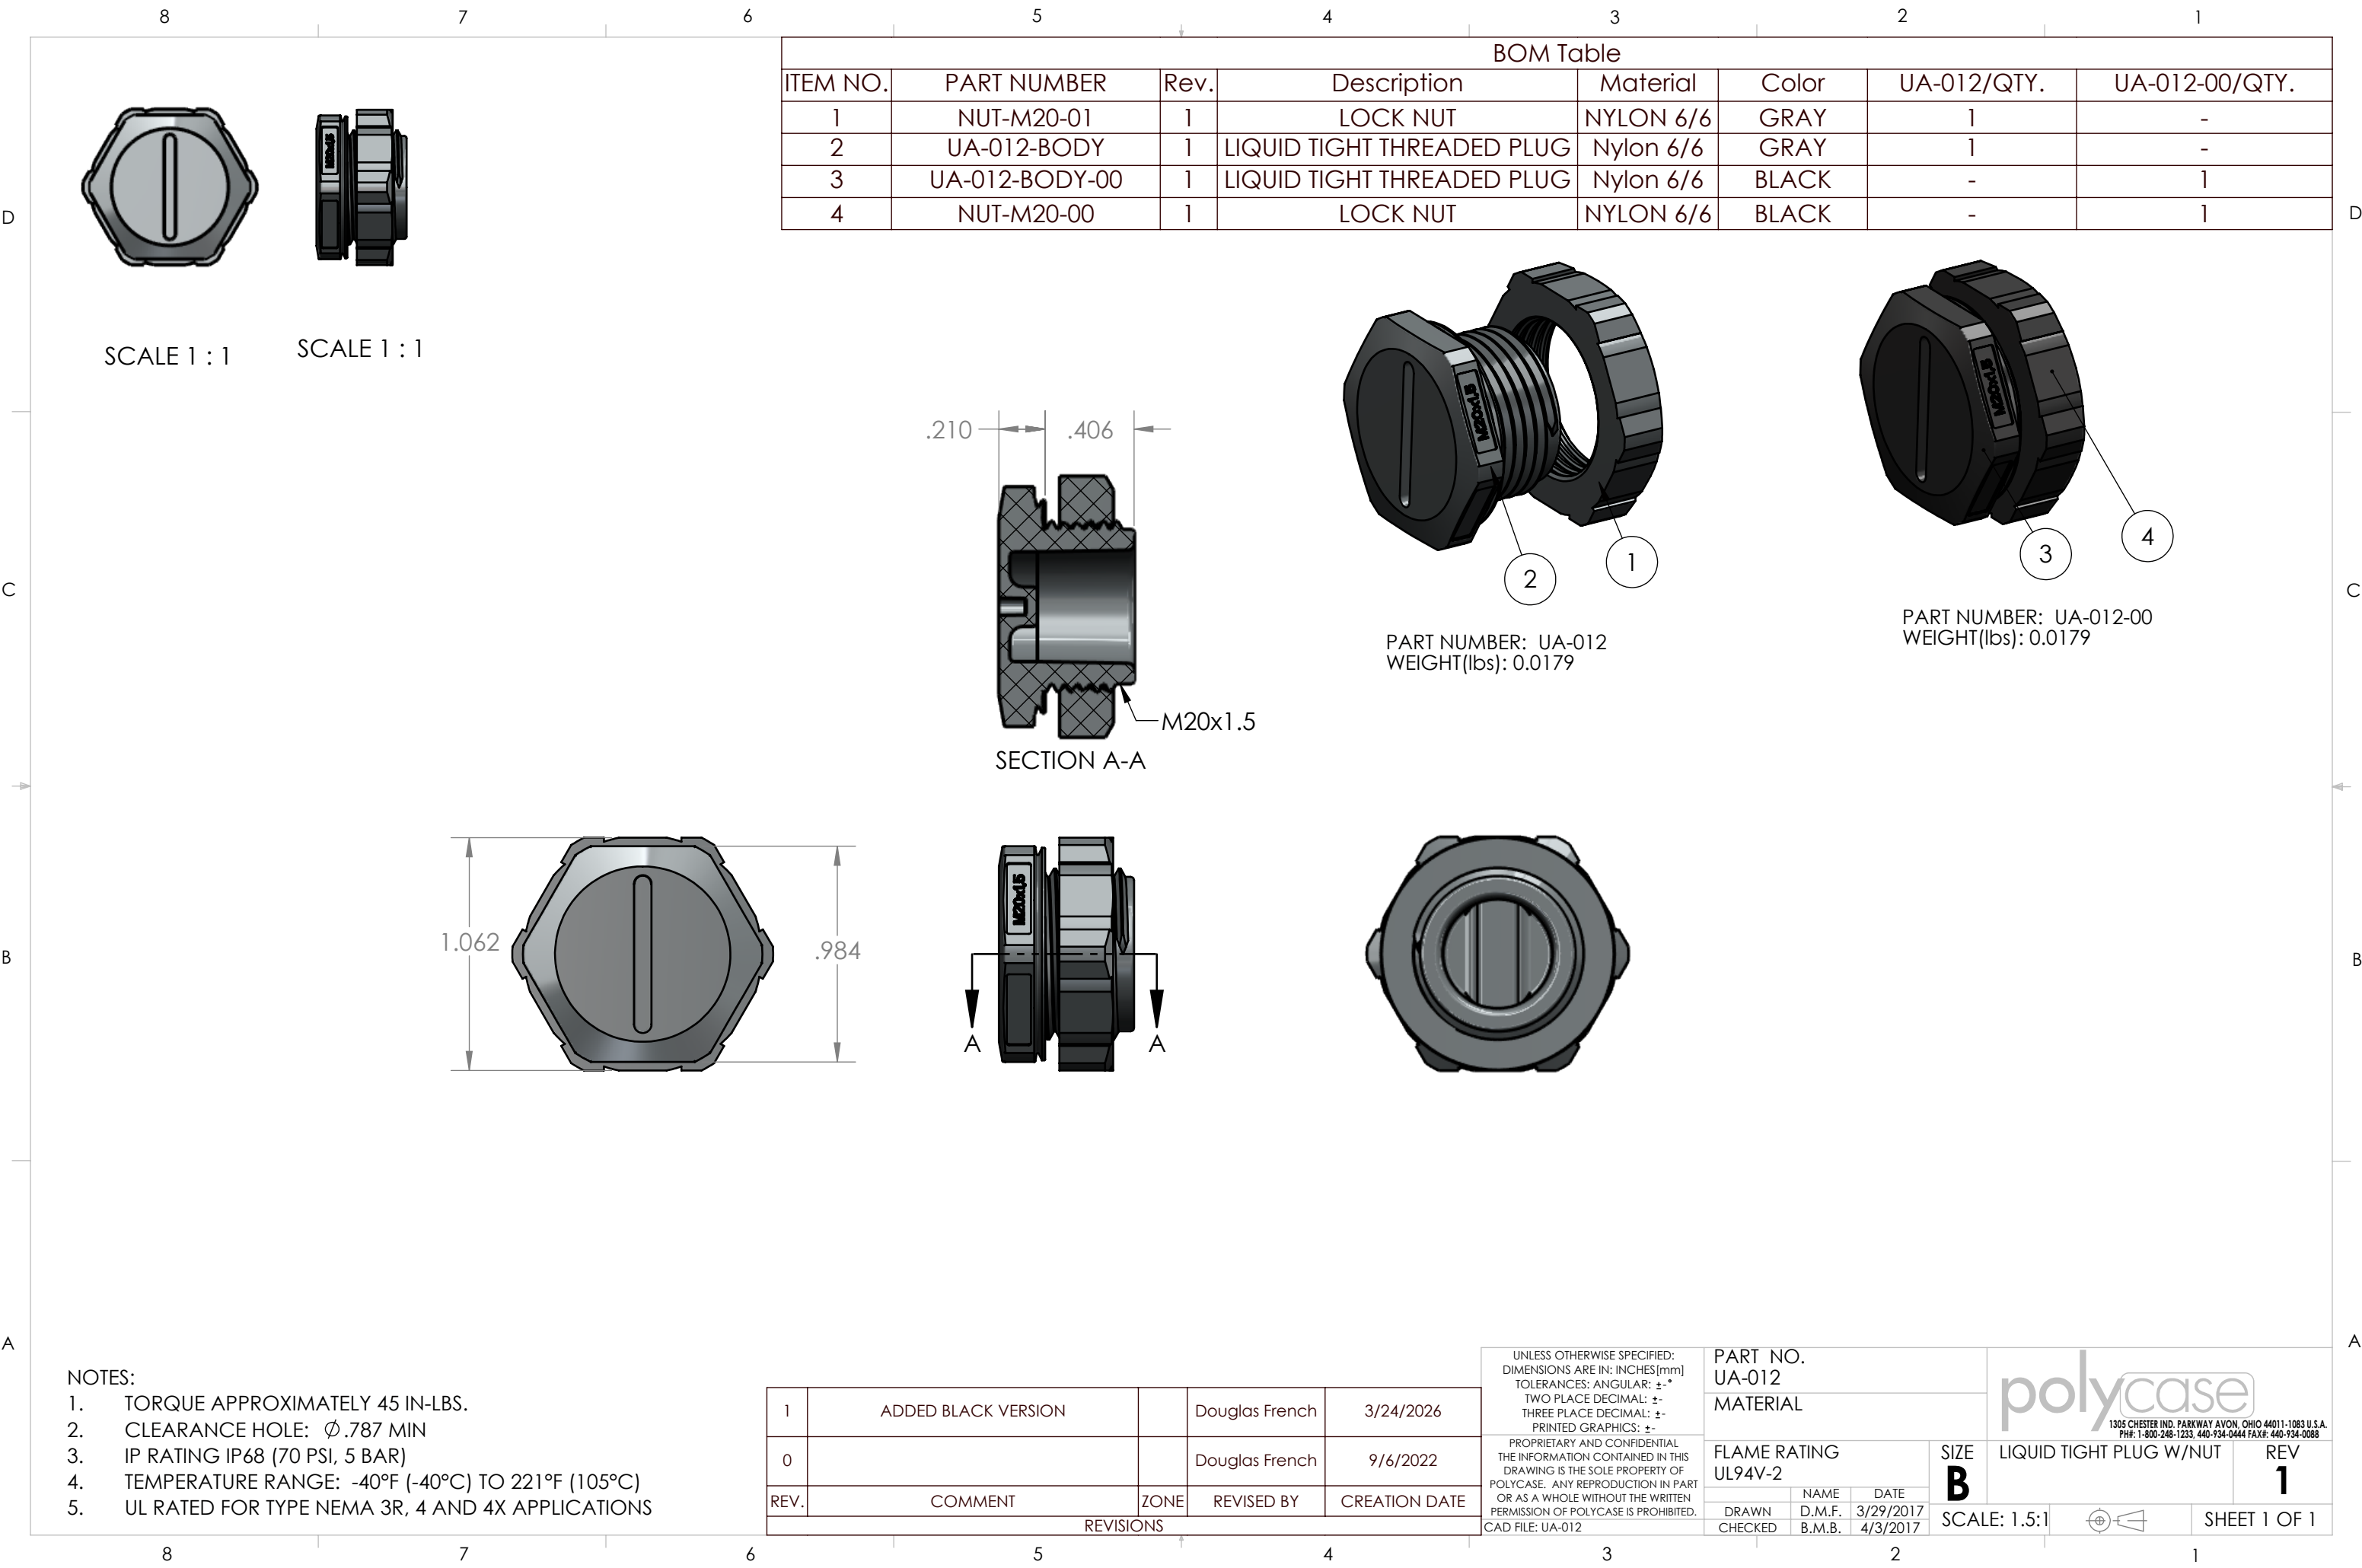




| BOM Table |                |      |                            |           |       |             |                |
|-----------|----------------|------|----------------------------|-----------|-------|-------------|----------------|
| ITEM NO.  | PART NUMBER    | Rev. | Description                | Material  | Color | UA-012/QTY. | UA-012-00/QTY. |
| 1         | NUT-M20-01     | 1    | LOCK NUT                   | NYLON 6/6 | GRAY  | 1           | -              |
| 2         | UA-012-BODY    | 1    | LIQUID TIGHT THREADED PLUG | Nylon 6/6 | GRAY  | 1           | -              |
| 3         | UA-012-BODY-00 | 1    | LIQUID TIGHT THREADED PLUG | Nylon 6/6 | BLACK | -           | 1              |
| 4         | NUT-M20-00     | 1    | LOCK NUT                   | NYLON 6/6 | BLACK | -           | 1              |

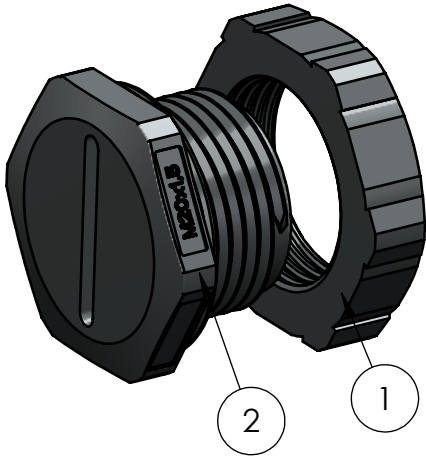

PART NUMBER: UA-012  
WEIGHT(lbs): 0.0179

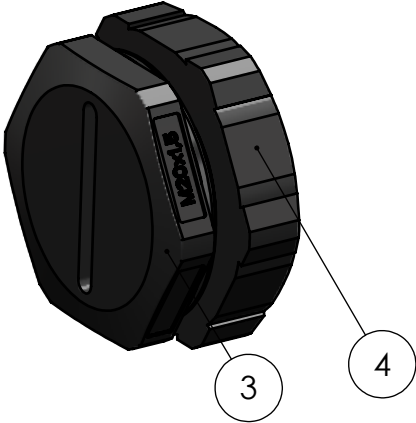

PART NUMBER: UA-012-00  
WEIGHT(lbs): 0.0179

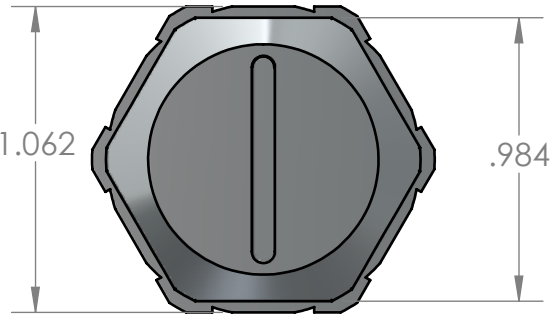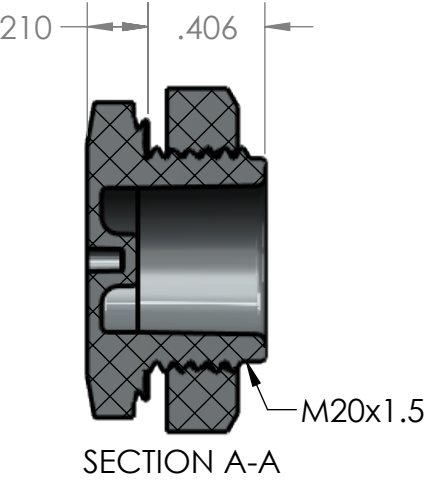

- NOTES:
- TORQUE APPROXIMATELY 45 IN-LBS.
  - CLEARANCE HOLE:  $\varnothing$ .787 MIN
  - IP RATING IP68 (70 PSI, 5 BAR)
  - TEMPERATURE RANGE: -40°F (-40°C) TO 221°F (105°C)
  - UL RATED FOR TYPE NEMA 3R, 4 AND 4X APPLICATIONS

| 1         | ADDED BLACK VERSION |      | Douglas French | 3/24/2026     |
|-----------|---------------------|------|----------------|---------------|
| 0         |                     |      | Douglas French | 9/6/2022      |
| REV.      | COMMENT             | ZONE | REVISED BY     | CREATION DATE |
| REVISIONS |                     |      |                |               |

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN: INCHES [mm]  
TOLERANCES: ANGULAR:  $\pm$ .°  
TWO PLACE DECIMAL:  $\pm$ .  
THREE PLACE DECIMAL:  $\pm$ .  
PRINTED GRAPHICS:  $\pm$ .  
PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
POLYCASE. ANY REPRODUCTION IN PART  
OR AS A WHOLE WITHOUT THE WRITTEN  
PERMISSION OF POLYCASE IS PROHIBITED.  
CAD FILE: UA-012

|                         |        |           |
|-------------------------|--------|-----------|
| PART NO.<br>UA-012      |        |           |
| MATERIAL                |        |           |
| FLAME RATING<br>UL94V-2 |        |           |
| DRAWN                   | NAME   | DATE      |
| CHECKED                 | D.M.F. | 3/29/2017 |
|                         | B.M.B. | 4/3/2017  |

1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.  
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088

SIZE  
**B**

SCALE: 1.5:1

LIQUID TIGHT PLUG W/NUT

REV  
**1**

SHEET 1 OF 1