
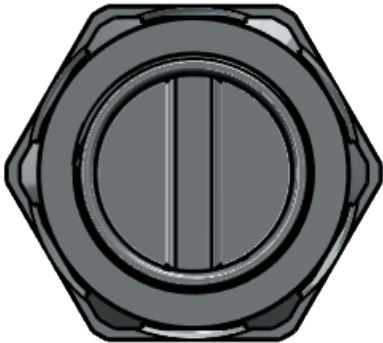
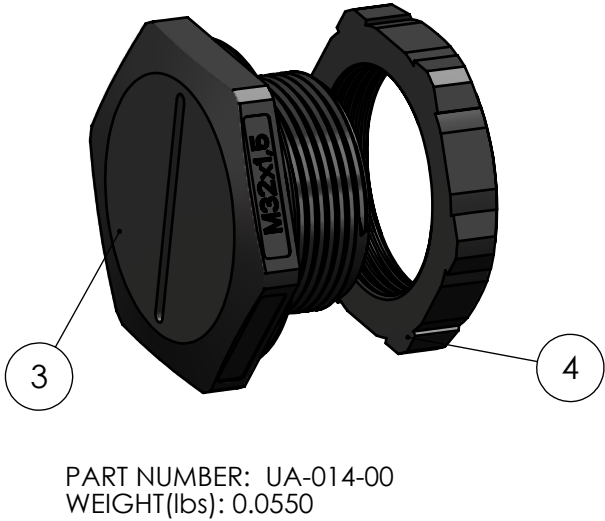
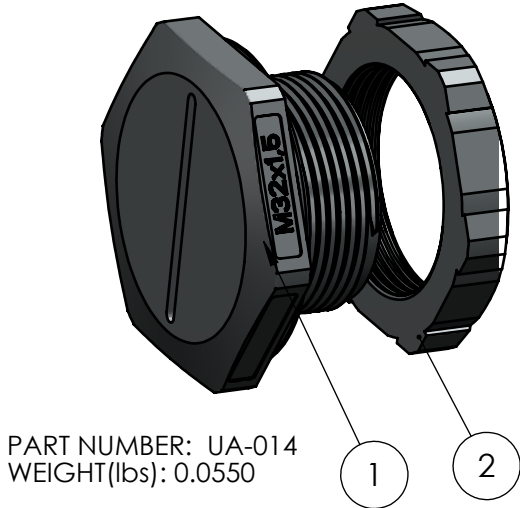
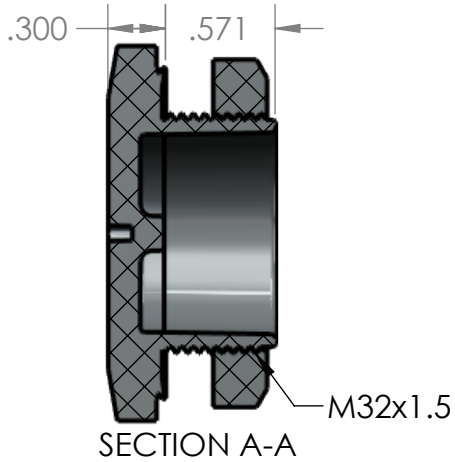


BOM Table							
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	UA-014/QTY.	UA-014-00/QTY.
1	UA-014-BODY	1	LIQUID TIGHT THREADED PLUG	Nylon 6/6	GRAY	1	-
2	NUT-M32-01	1	LOCK NUT	Nylon 6/6	GRAY	1	-
3	UA-014-BODY-00	1	LIQUID TIGHT THREADED PLUG	Nylon 6/6	BLACK	-	1
4	NUT-M32-00	1	LOCK NUT	Nylon 6/6	BLACK	-	1

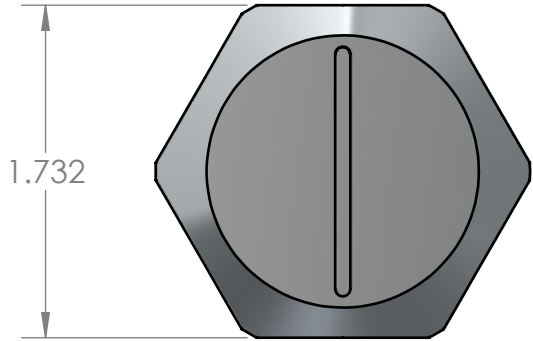

- NOTES:
- TORQUE APPROXIMATELY 100 IN-LBS.
 - CLEARANCE HOLE: $\varnothing$ 1.260 MIN
 - IP RATING IP68 (70 PSI, 5 BAR)
 - TEMPERATURE RANGE: -40°F (-40°C) TO 221°F (105°C)

1	ADDED BLACK VERSION		Douglas French	3/24/2026
0			Douglas French	9/6/2022
REV.	COMMENT	ZONE	REVISED BY	CREATION DATE
REVISIONS				

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES [mm]
TOLERANCES: ANGULAR: $\pm$ °
TWO PLACE DECIMAL: $\pm$.005
THREE PLACE DECIMAL: $\pm$.0005
PRINTED GRAPHICS: $\pm$.005

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
POLYCASE. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF POLYCASE IS PROHIBITED.
CAD FILE: UA-014

PART NO. UA-014			 1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A. PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088		
MATERIAL					
FLAME RATING UL94V-2			SIZE B	LIQUID TIGHT PLUG W/NUT	REV 1
	NAME	DATE	SCALE: 1:1  SHEET 1 OF 1		
DRAWN CHECKED	D.M.F. B.M.B.	3/29/2017 4/3/2017			