





BOM Table									
ITEM NO.	PART NUMBER	Rev.	Description	Material	FlameRating	Color	SL-64PXXT/QTY.	SL-64PXXT*01/QTY.	SL-64PXXT*03/QTY.
1	SL-64BPXX	2	BASE: WITHOUT FLANGES, WITHOUT PCB BOSSES	ABS	UL94-5VA	BLACK	1	-	-
2	SL-64C-T	1	COVER: TEXTURED FLUSH	ABS	UL94-5VA	BLACK	1	-	-
3	SCREWS-HL5/8-BR	0	4-24 X .625 CROSS OVAL C'SUNK HEAD THREAD FORMING SCREW	STEEL			4	4	4
4	SL-64BPXX*01	2	BASE: WITHOUT FLANGES, WITHOUT PCB BOSSES	ABS	UL94-5VA	GRAY	-	1	-
5	SL-64C-T*01	1	COVER: TEXTURED FLUSH	ABS	UL94-5VA	GRAY	-	1	-
6	SL-64BPXX*03	2	BASE: WITHOUT FLANGES, WITHOUT PCB BOSSES	ABS	UL94-5VA	BONE	-	-	1
7	SL-64C-T*03	1	COVER: TEXTURED FLUSH	ABS	UL94-5VA	BONE	-	-	1

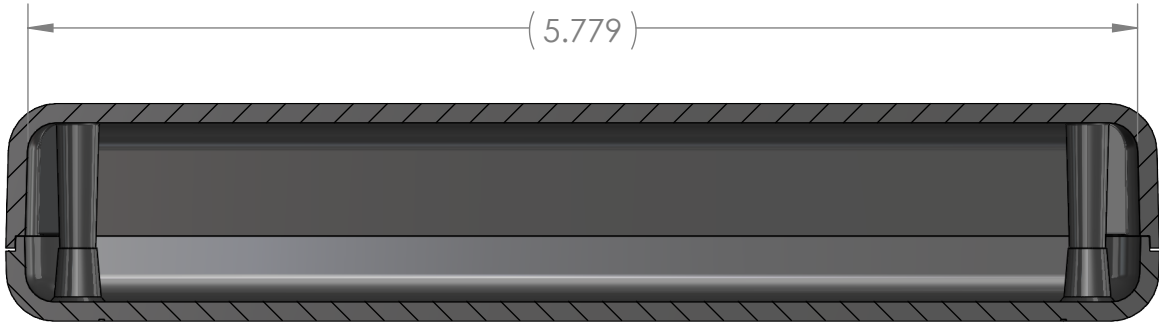


SECTION B-B

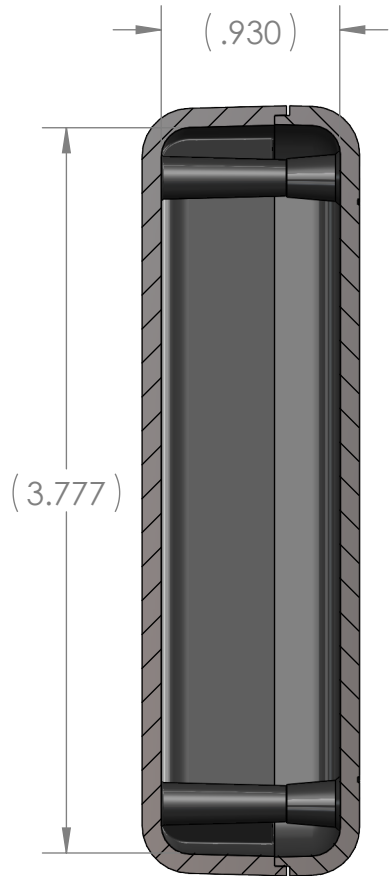


SECTION A-A

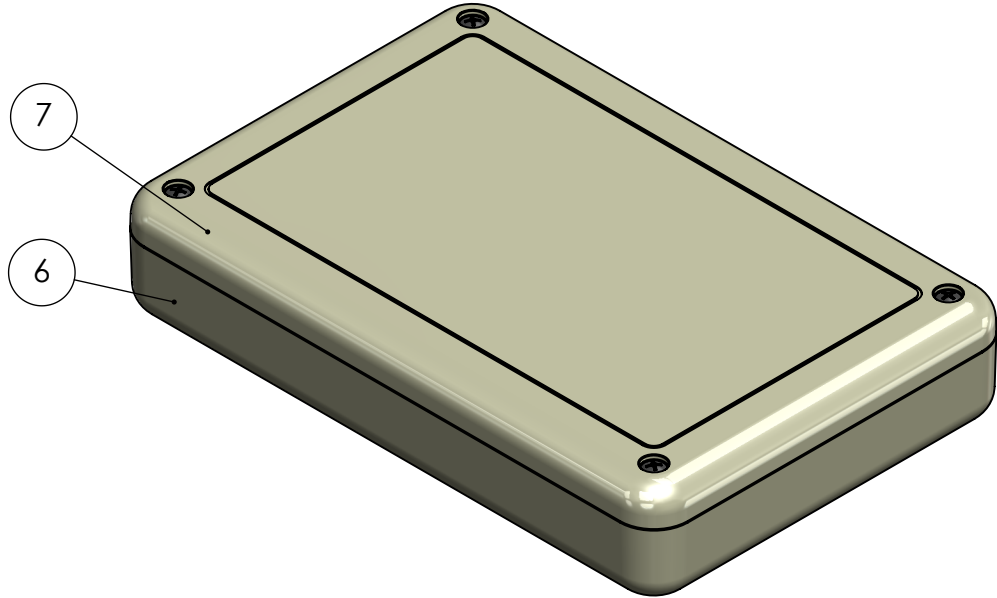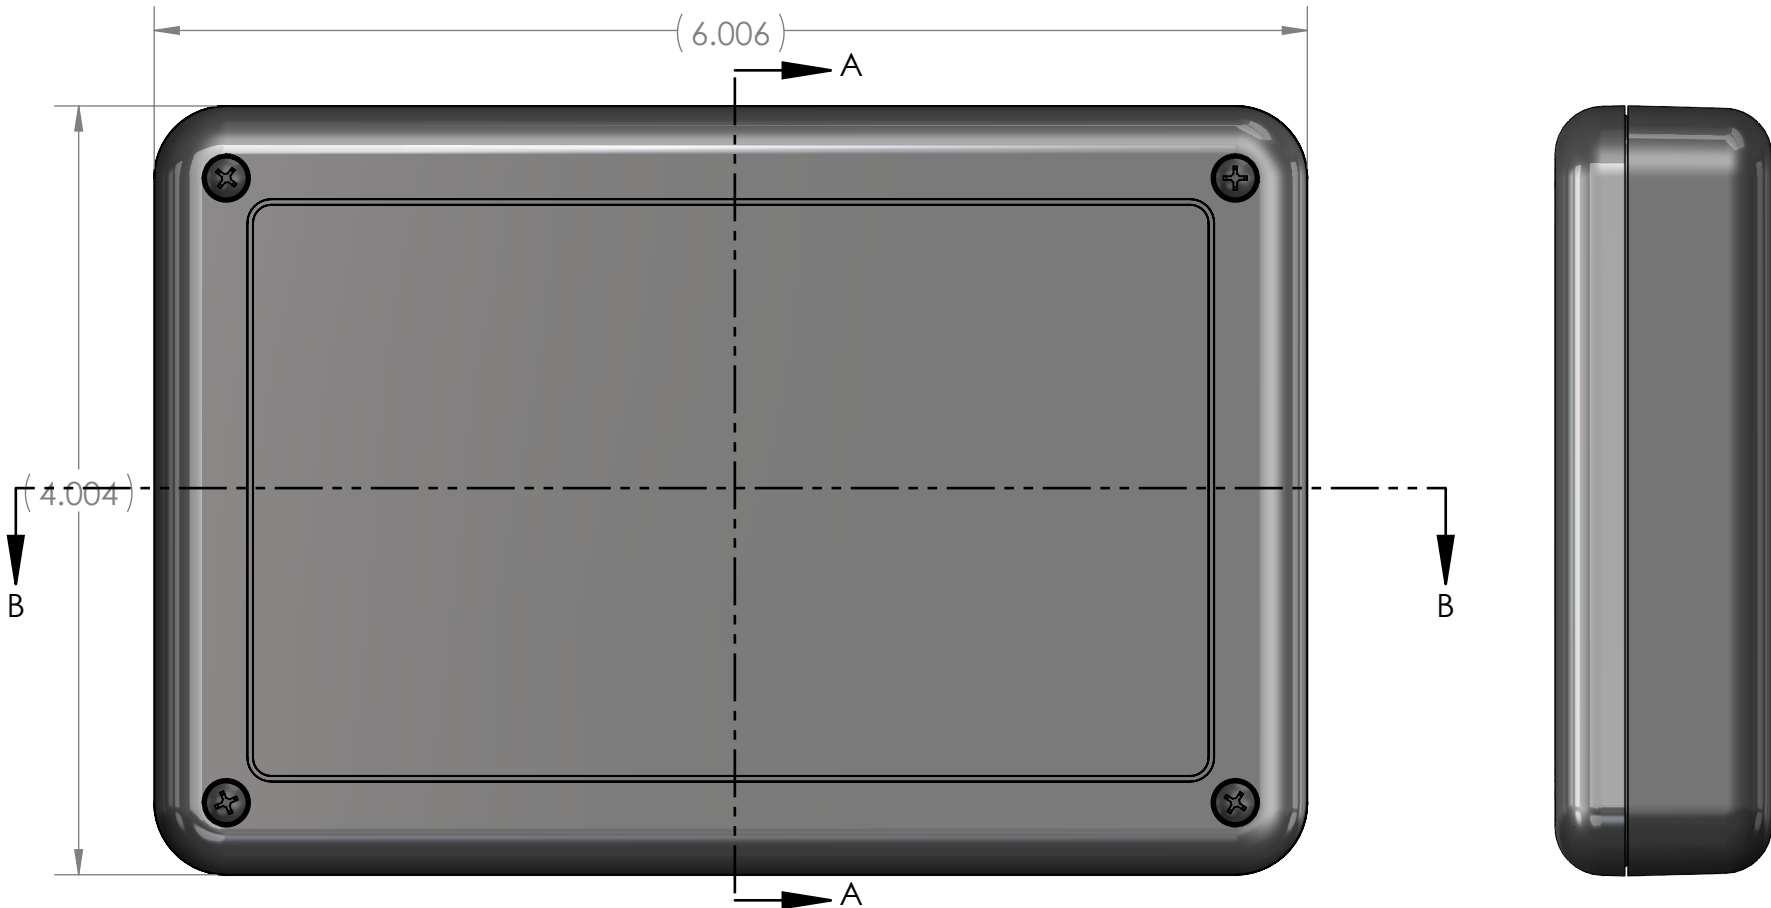

PART NUMBER: SL-64PXXT*03

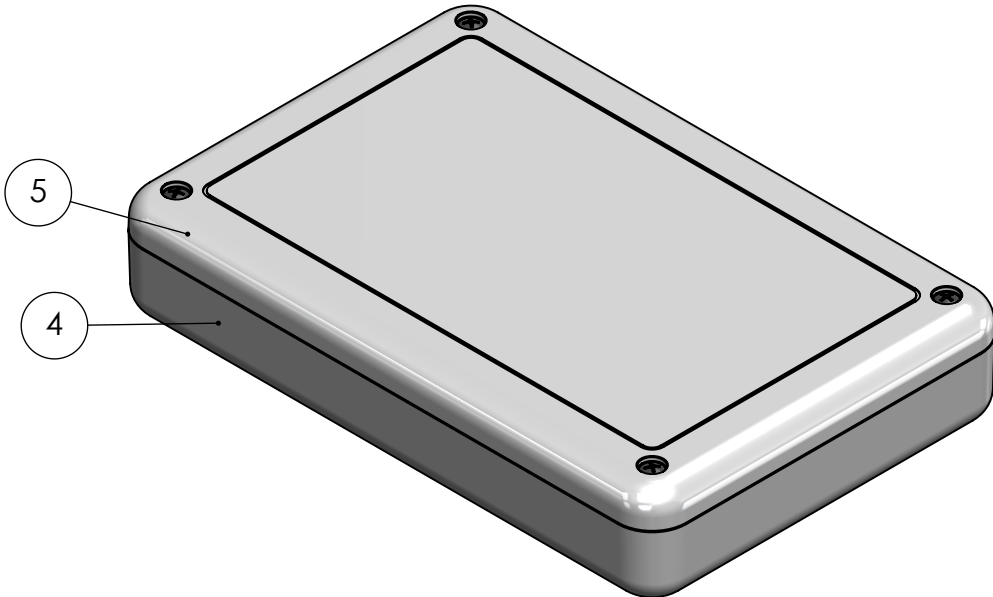

PART NUMBER: SL-64PXXT*01

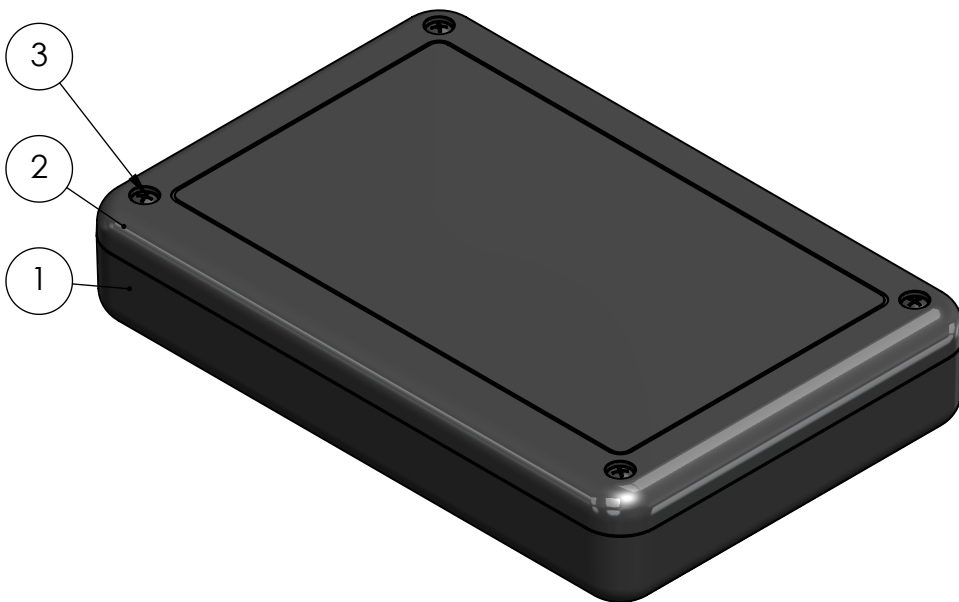

PART NUMBER: SL-64PXXT

1	UPDATED FLANGED VERSION		D.M.F.		7/18/2023
REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE
REVISIONS					

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES[mm] TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±.010 THREE PLACE DECIMAL: ±.005 PRINTED GRAPHICS: ±.010 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: SL-64PXXT						PART NO. SL-64PXXT		MATERIAL		FLAME RATING		SIZE C	SCALE: 1:1		REV 1		SHEET 1 OF 1	
						DRAWN CHECKED	NAME B.M.B.	DATE 12/1/2022										