TOLERANCE CHART																						
DIMENSION RANGE	0	.039	.118	.236	.394	.591	.866	1.181	1.575	2.087	2.756	3.543	4.724	6.299	7.874	9.843	12.402	15.748	19.685	24.803	31.496
	.039	.118	.236	.394	.591	.866	1.181	1.575	2.087	2.756	3.543	4.724	6.299	7.874	9.843	12.402	15.748	19.685	24.803	31.496	39.37
TOOL DEPENDENT	±.007	±.007	±.008	±.008	±.009	±.010	±.011	±.012	±.013	±.015	±.017	±.020	±.024	±.028	±.035	.043	.051	.063	.079	.098	.118
NON-TOOL DEPENDENT	±.003	±.004	±.004	±.004	±.005	±.006	±.007	±.008	±.009	±.011	±.013	±.016	±.020	±.024	±.031	.039	.047	.059	.075	.094	.114

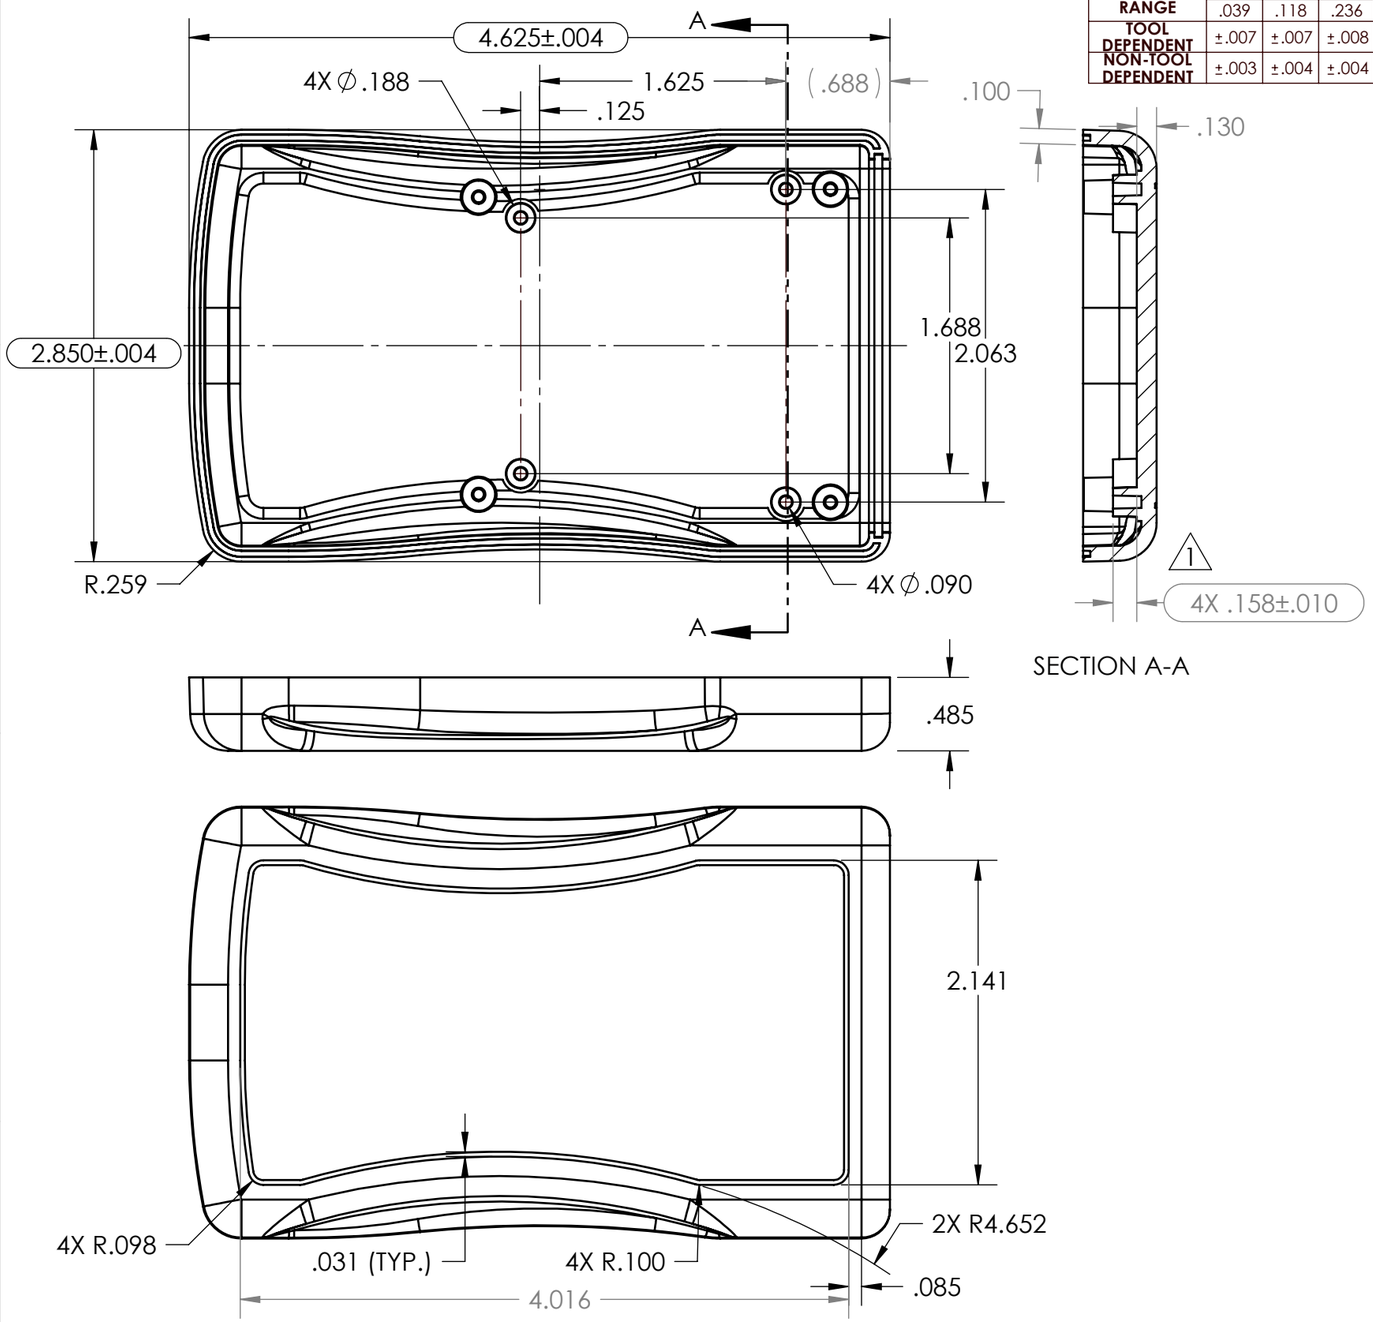

SECTION A-A

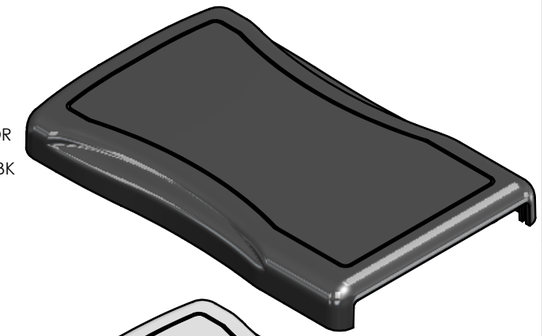

PART NUMBER: VM-24CMBT-NOR
MATERIAL: PPE+PS
MATERIAL SPEC: /PPO/SE100X/BK
COLOR: BLACK
FLAME RATING: UL94V-1

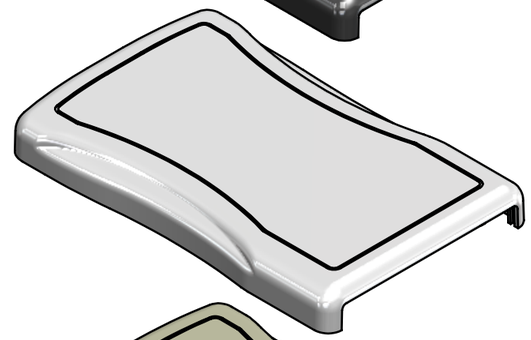

PART NUMBER: VM-24CMBT*14
MATERIAL: ABS
MATERIAL SPEC: /ABS/PA765/WH
COLOR: WHITE
FLAME RATING: UL94-5VA

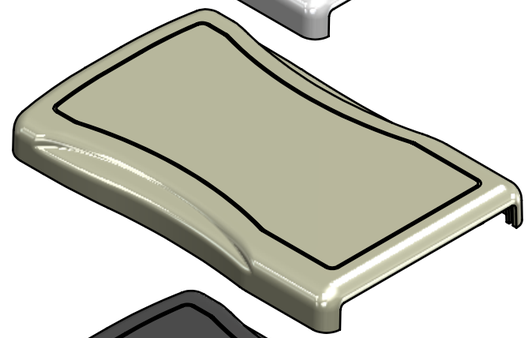

PART NUMBER: VM-24CMBT*03
MATERIAL: ABS
MATERIAL SPEC: /ABS/PA765/BO
COLOR: BONE
FLAME RATING: UL94-5VA

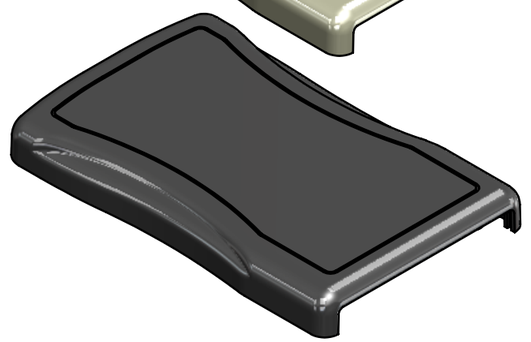

PART NUMBER: VM-24CMBT
MATERIAL: ABS
MATERIAL SPEC: /ABS/PA765/BK
COLOR: BLACK
FLAME RATING: UL94-5VA

NOTES:
1. REFER TO SOLID MODEL FOR COMPLETE PART DEFINITION.
2. (INSPECTION DIMENSION)
3. GATE FLUSH ±.015
4. FLASH .005 MAX

REVISIONS				
REV.	COMMENT	ZONE	REVISED BY	MODIFICATION DATE
1	adjusted boss dimension to flat	C5	Douglas French	4-2-2024
0	CONFIG UPDATE		Douglas French	3-29-2024

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: ±2°
TWO PLACE DECIMAL: ±.-
THREE PLACE DECIMAL: ±.-
PRINTED GRAPHICS: ±.010

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED.

CAD FILE: VM-24CMBT

PART NO.
AS NOTED

MATERIAL
-

FLAME RATING
-

	NAME	DATE
DRAWN	D.M.F.	3/27/2024
CHECKED	-	12/31/2999

SIZE B

COVER: WITH MOUNTING BOSSES, TEXTURED FLUSH

REV 1

SCALE: 1:1

SHEET 1 OF 1

polycase
1305 CHESTER IND. PARKWAY AVON, OHIO 44011-1083 U.S.A.
PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088