| BOM Table | | | | | | | |
|---|---|---|---|---|---|---|---|
| ITEM NO. | PART NUMBER | Rev. | Description | Material | Color | FlameRating | QTY. |
| 1 | WP-39B*15 | 0 | WP BASE, W/MOUNTING BOSSES | POLYCARBONATE | LIGHT GRAY | UL94-HB (UL FILE E41613) | 1 |
| 2 | WC-39C*08 | 0 | WC COVER, W/GASKET | POLYCARBONATE | CLEAR | UL94-HB (UL FILE E41613) | 1 |
| 3 | SCREWS-SSM4-20-4 | 0 | ASSEMBLY SCREWS, 4 PACK | | | | 1 |
| 3.1 | SCREWS-SSM4-20 | 0 | M4X0.7 X 20mm OAL, PHILLIPS DRIVE MACHINE SCREW | STAINLESS STEEL | | | 4 |

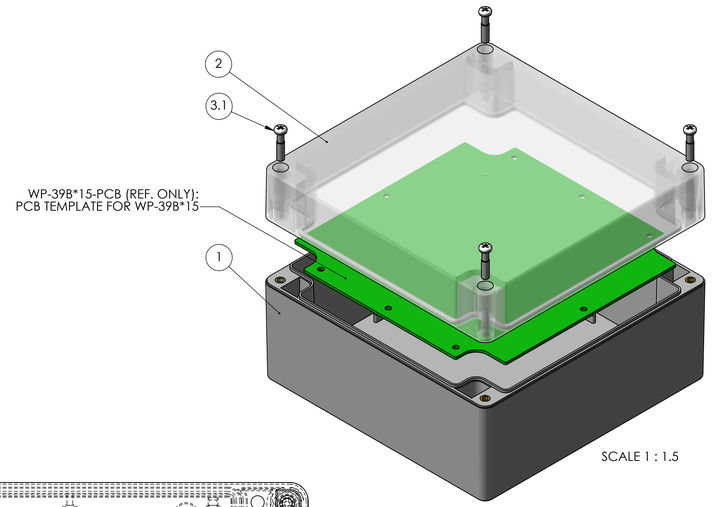


SCALE 1 : 1.5

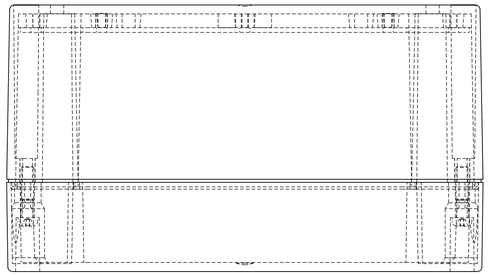

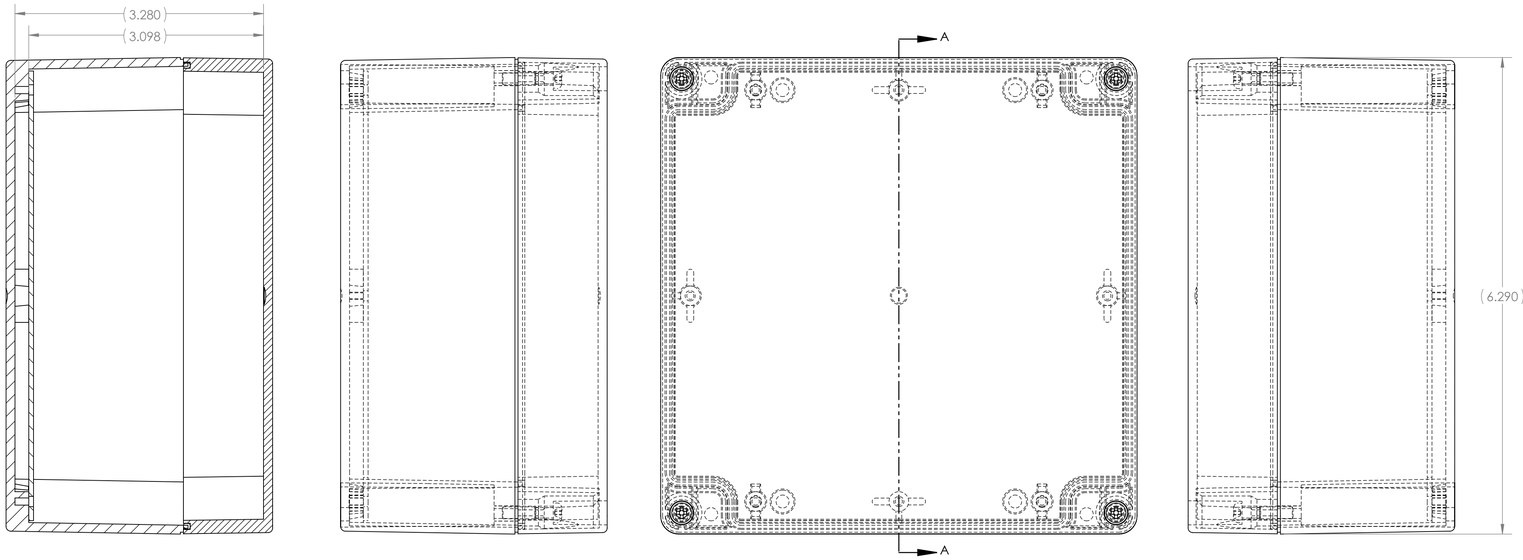


SECTION A-A

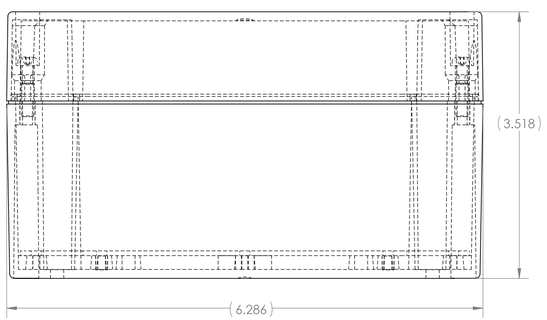


NOTES:
1. SERVICE TEMPERATURE RANGE: -40°C TO 120°C
2. DESIGNED TO NEMA 1, 2, 4, 4X, 12, 13
3. MOUNTING FLANGE KITS ARE AVAILABLE FROM POLYCASE.
4. UL LISTED TO UL508-4X SPECIFICATIONS (UL FILE #E194432).

| REV. | DESCRIPTION | ZONE | BY | APPR'D | DATE |
|---|---|---|---|---|---|
| -.01 | REVISED TYPO IN BOM QTY. COLUMN | F1 | D.M.F. | D.M.F. | 8/30/2012 |

REVISIONS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN: INCHES[mm]
TOLERANCES: ANGULAR: ±2°
TWO PLACE DECIMAL: ± .010
THREE PLACE DECIMAL: ± .005
PRINTED GRAPHICS: ± .010

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED.

CAD FILE: WC-39*1508

PART NO.
WC-39*1508

MATERIAL
FLAME RATING
UL94-HB

polycase
1301 CHESTER IND. PARKWAY AVON, OHIO 44011-1003 U.S.A.
PH: 1-800-240-1222, 440-934-5444 FAX® 440-934-5088

SIZE D
WC UNIT, W/MTG BOSSES, W/GASKET, LIGHT GRAY BASE, CLEAR COVER
REV 0

| | NAME | DATE |
|---|---|---|
| DRAWN | D.M.F. | 8/9/2011 |
| CHECKED | C.C.B. | 8/10/2011 |

SCALE: 1:1

SHEET 1 OF 1

REV 0
WC-39*1508
SIZE D