

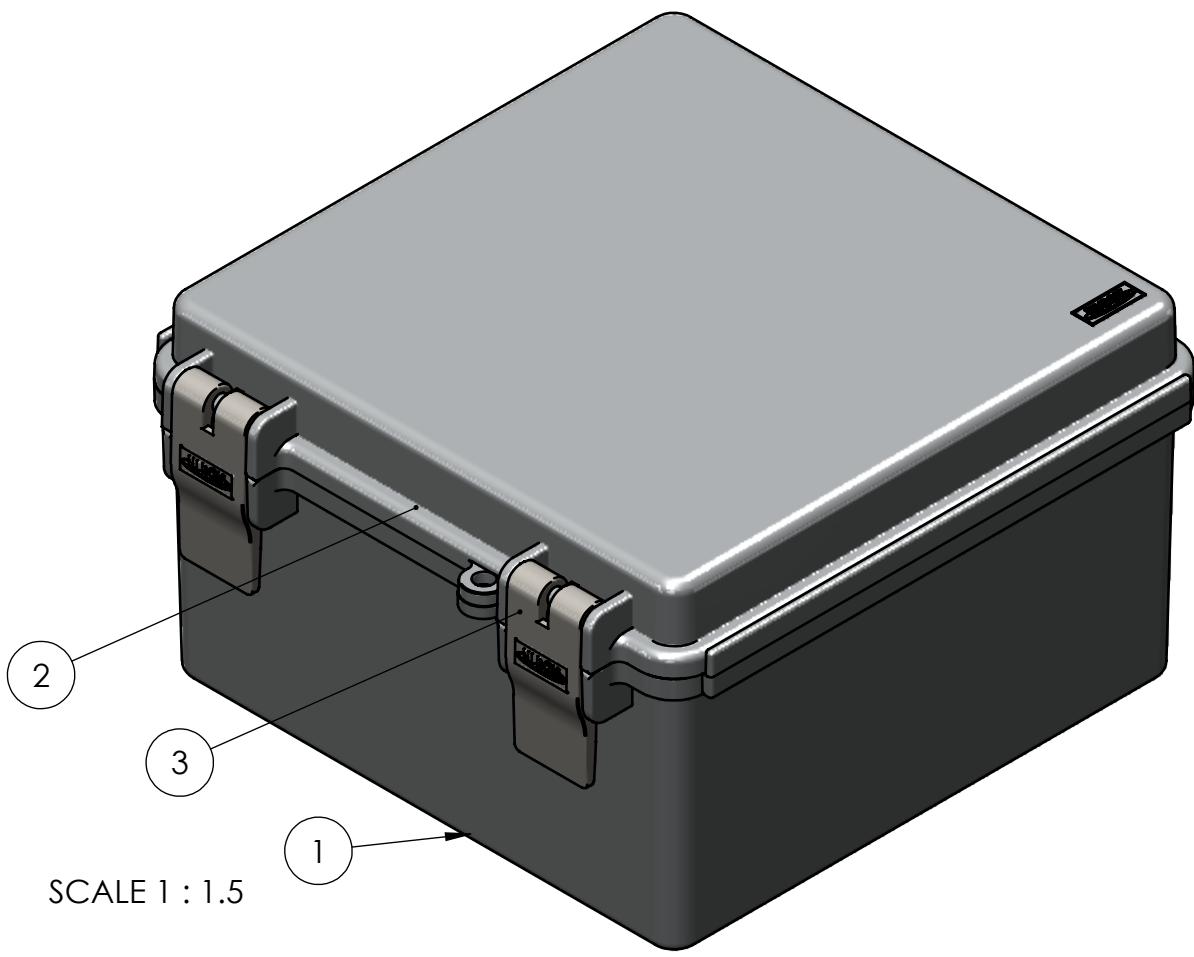
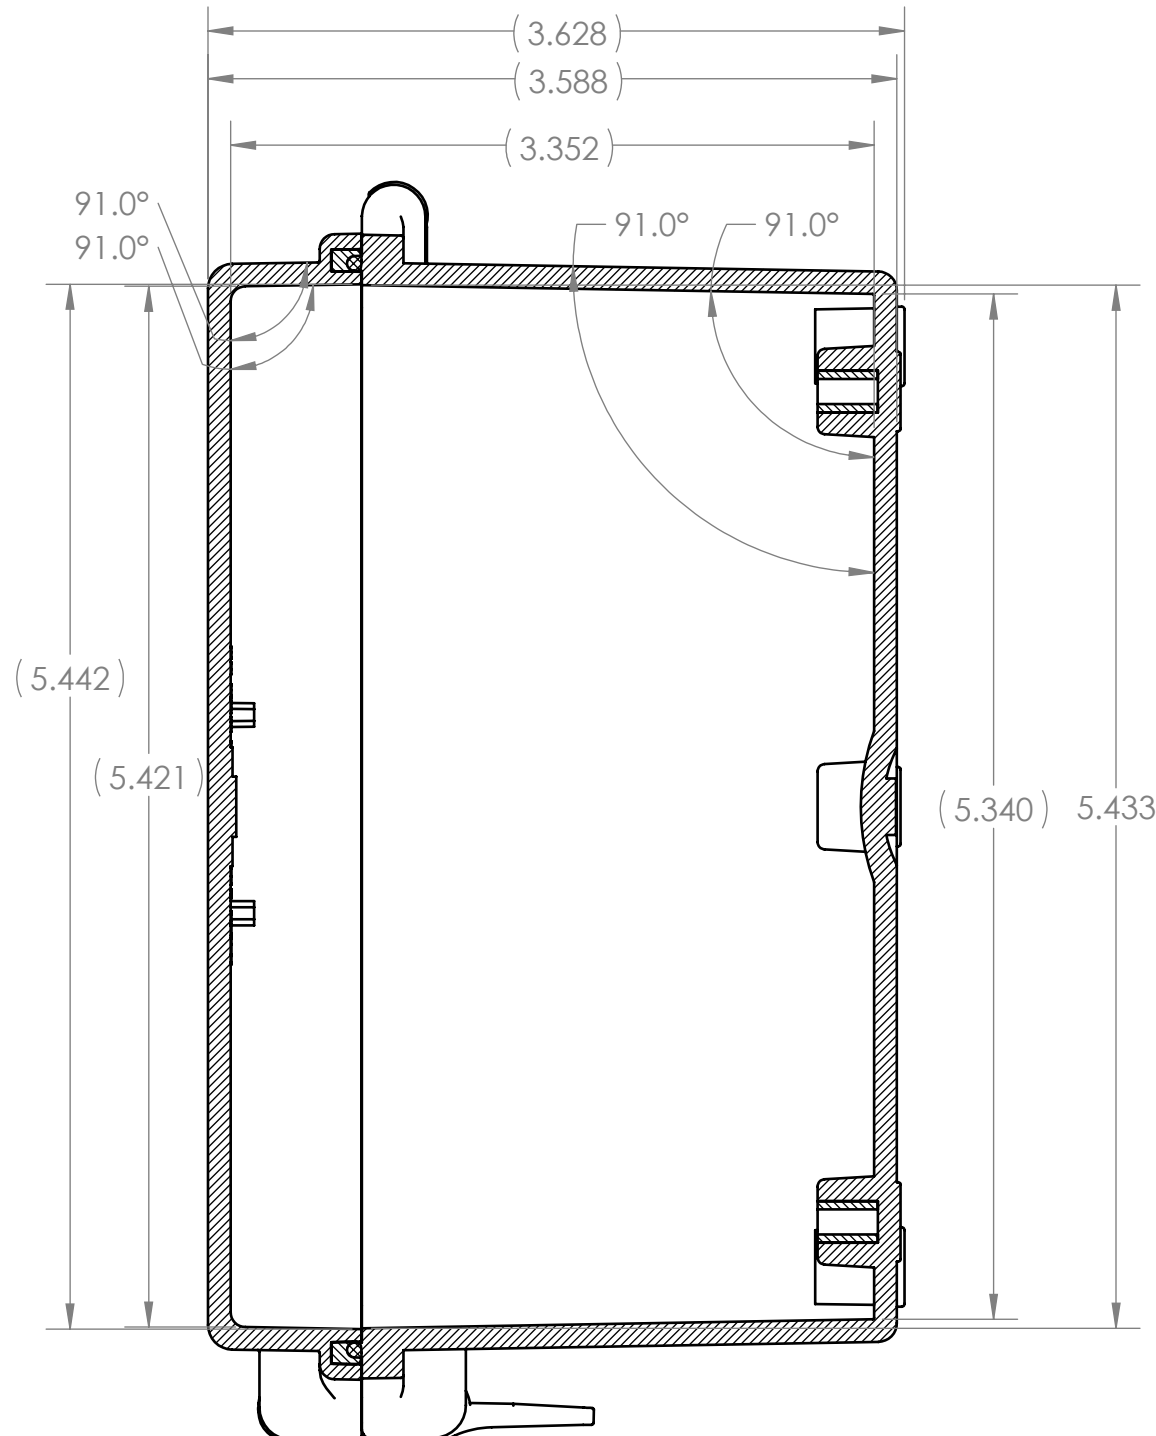
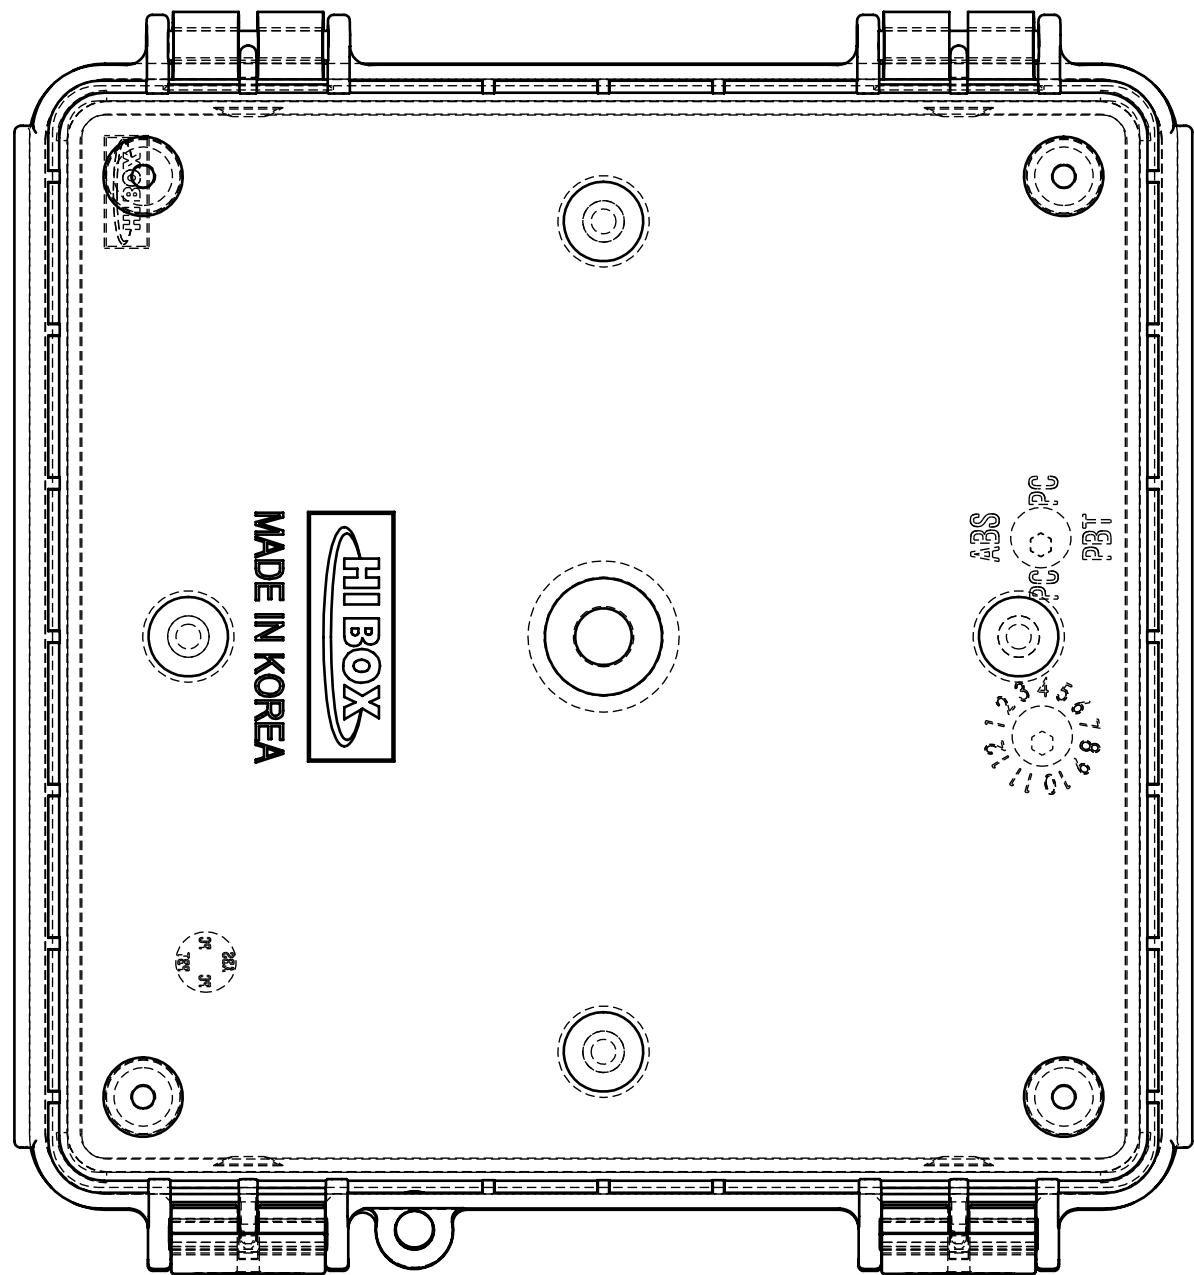
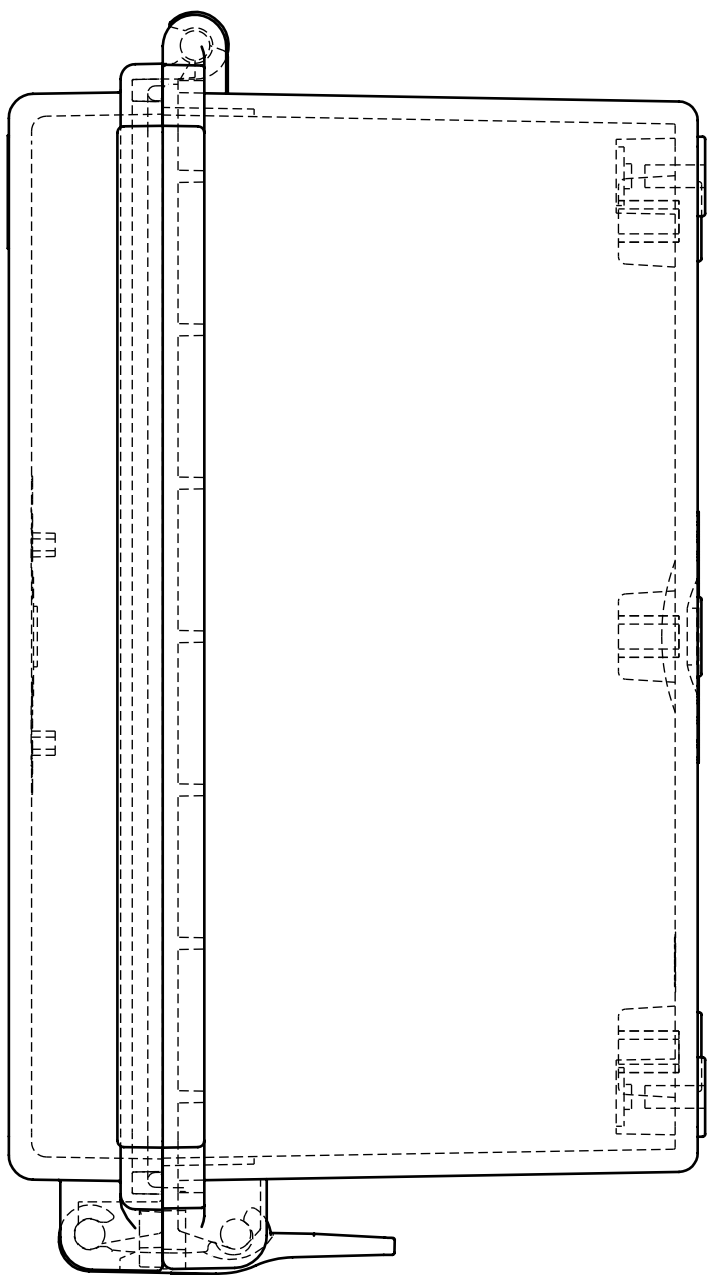


BOM Table								
ITEM NO.	PART NUMBER	Rev.	Description	Material	Flame Rating	Outdoor Suitability	Color	WH-10S-02/QTY.
1	WH-10B-02	1	BASE	PC/PBT	UL94-5VA	UL746C F1	GRAY	1
2	WH-10C-02	0	COVER W/GASKET	PC/PBT	UL94-5VA	UL746C F1	GRAY	1
3	WH-02L-01	0	LATCH	PC/PBT	UL94-5VA	UL746C F1	GRAY	2

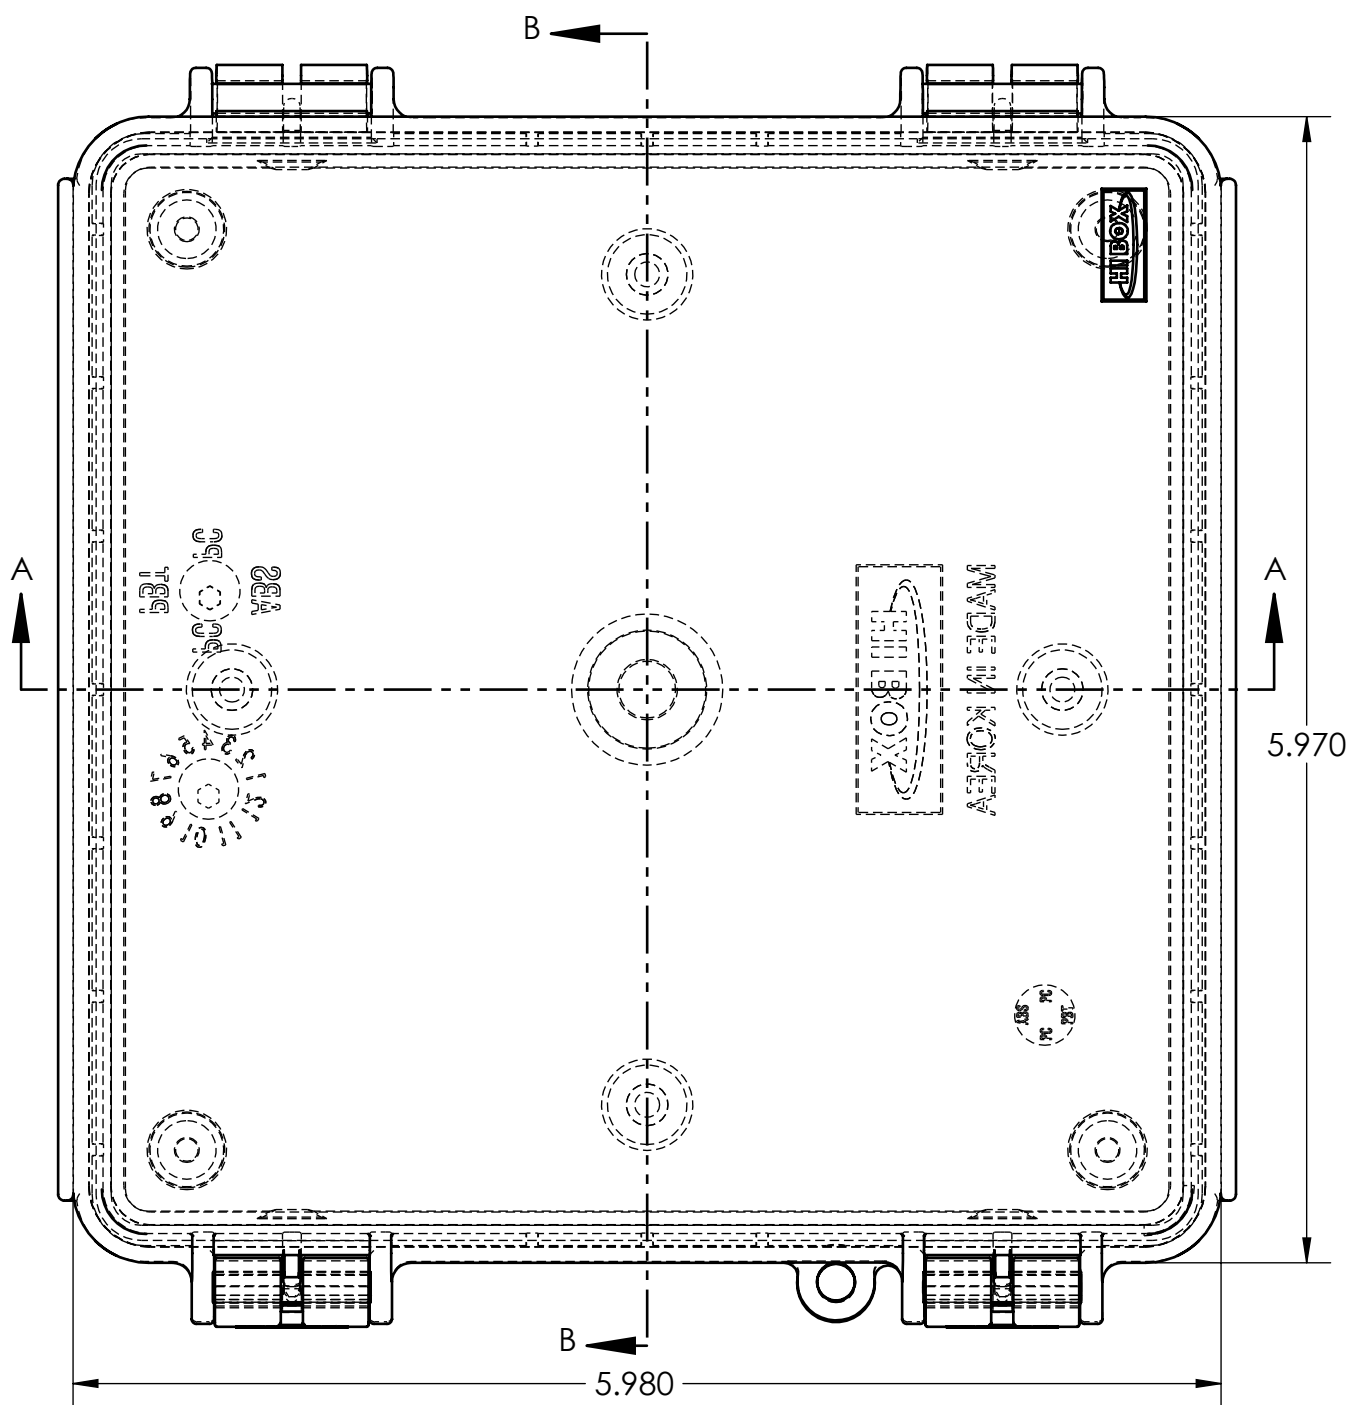



SCALE 1 : 1.5

UL LISTED: UL508-4X (E194432)
CONTINUOUS OPERATING TEMP: -40°C to 75°C/-40°F to 167°F

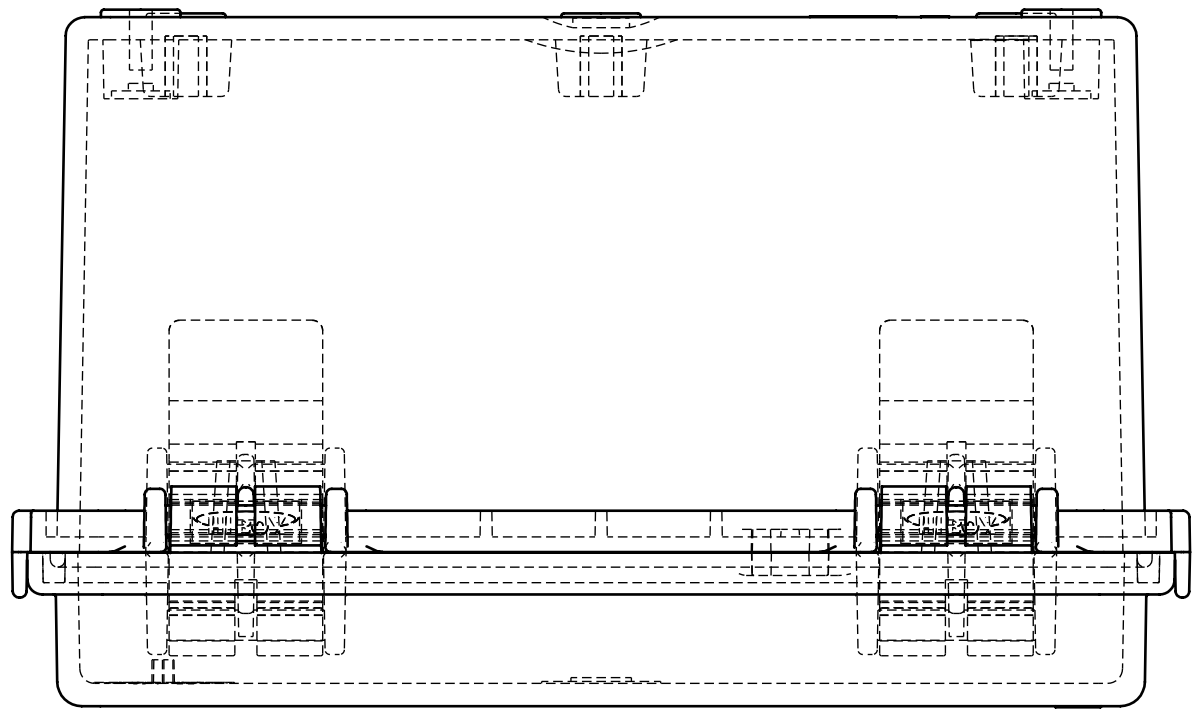


SECTION B-B

POLYURETHANE
FOAM GASKET

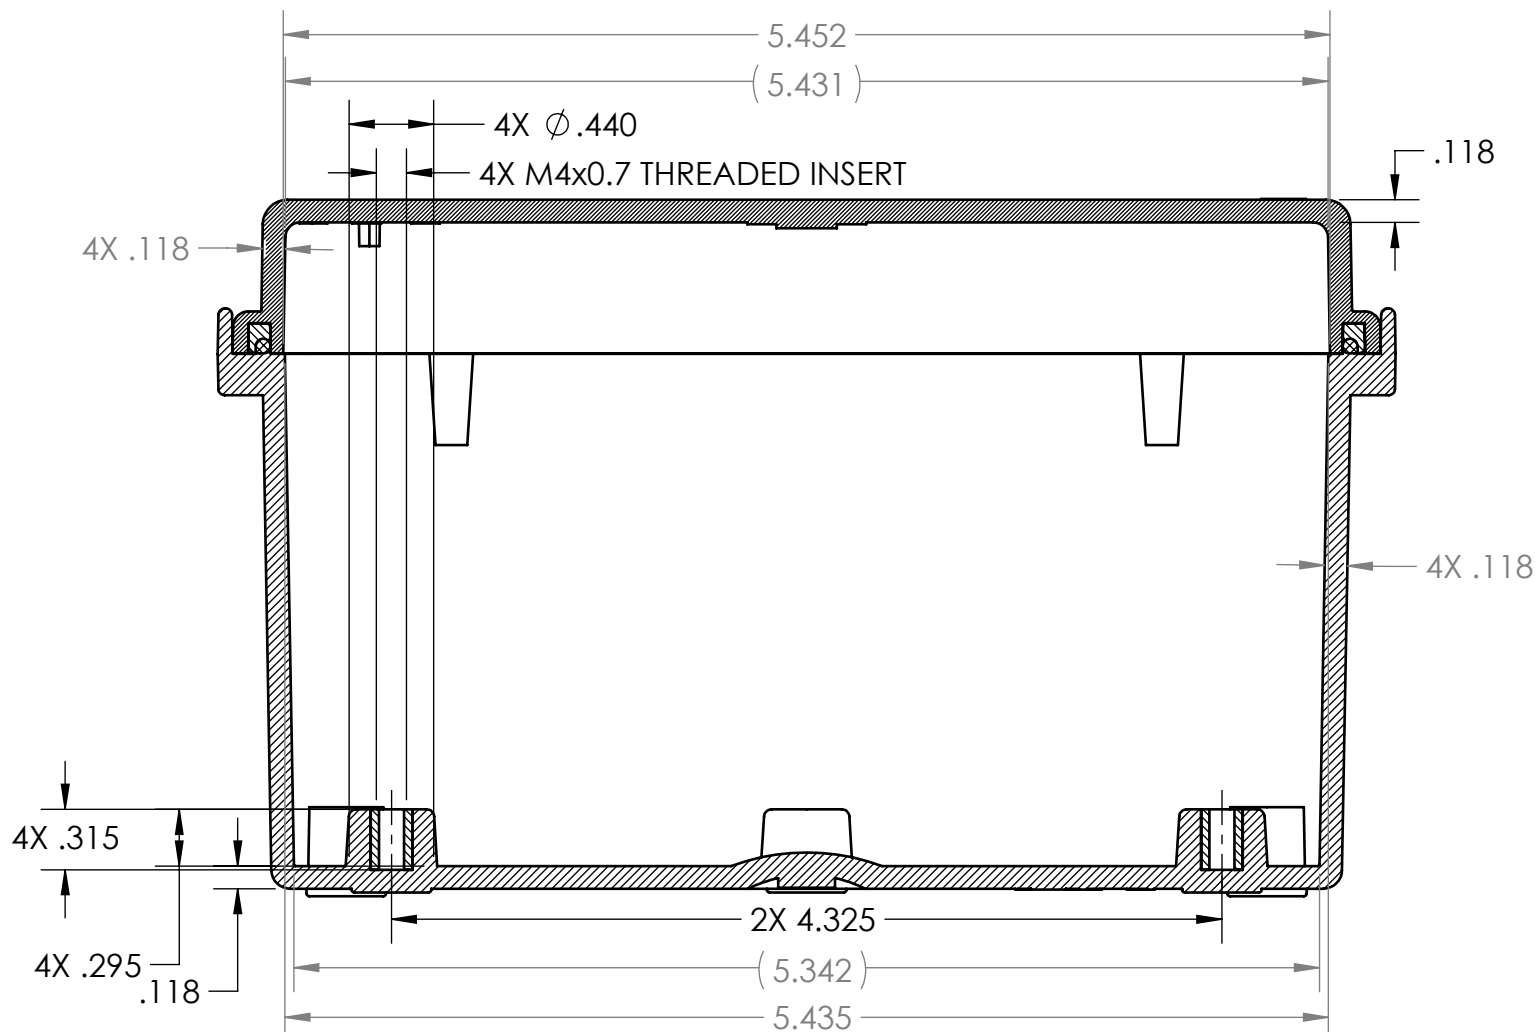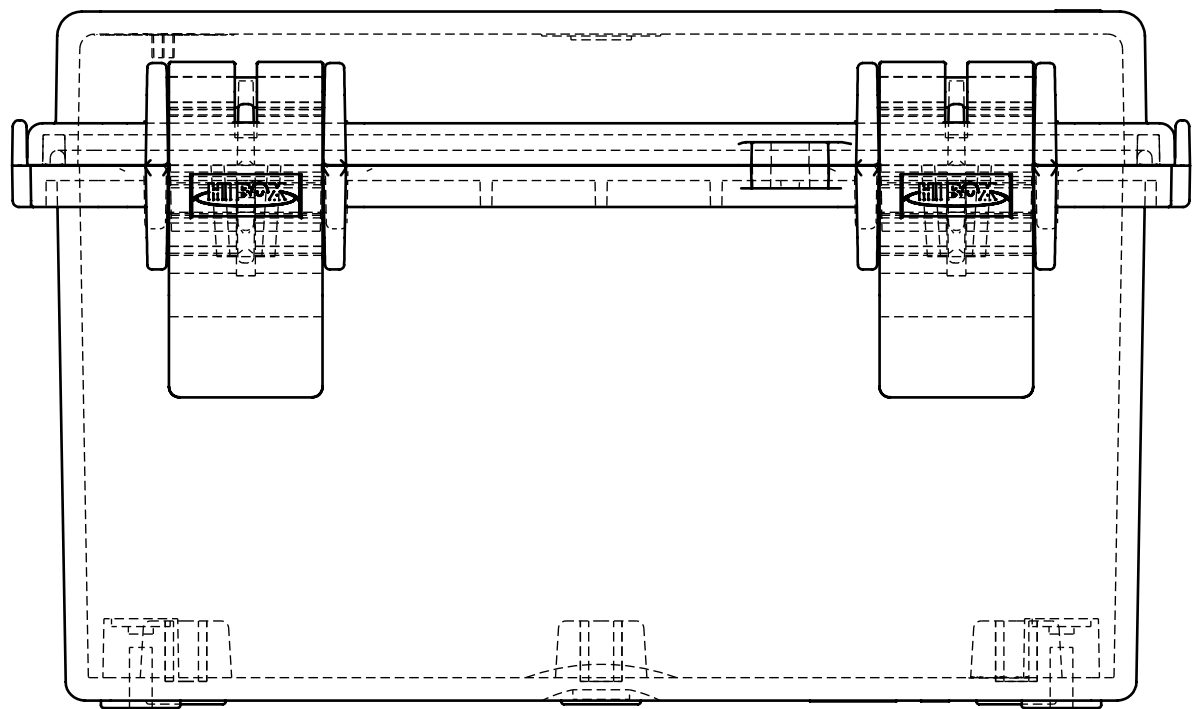

SECTION A-A

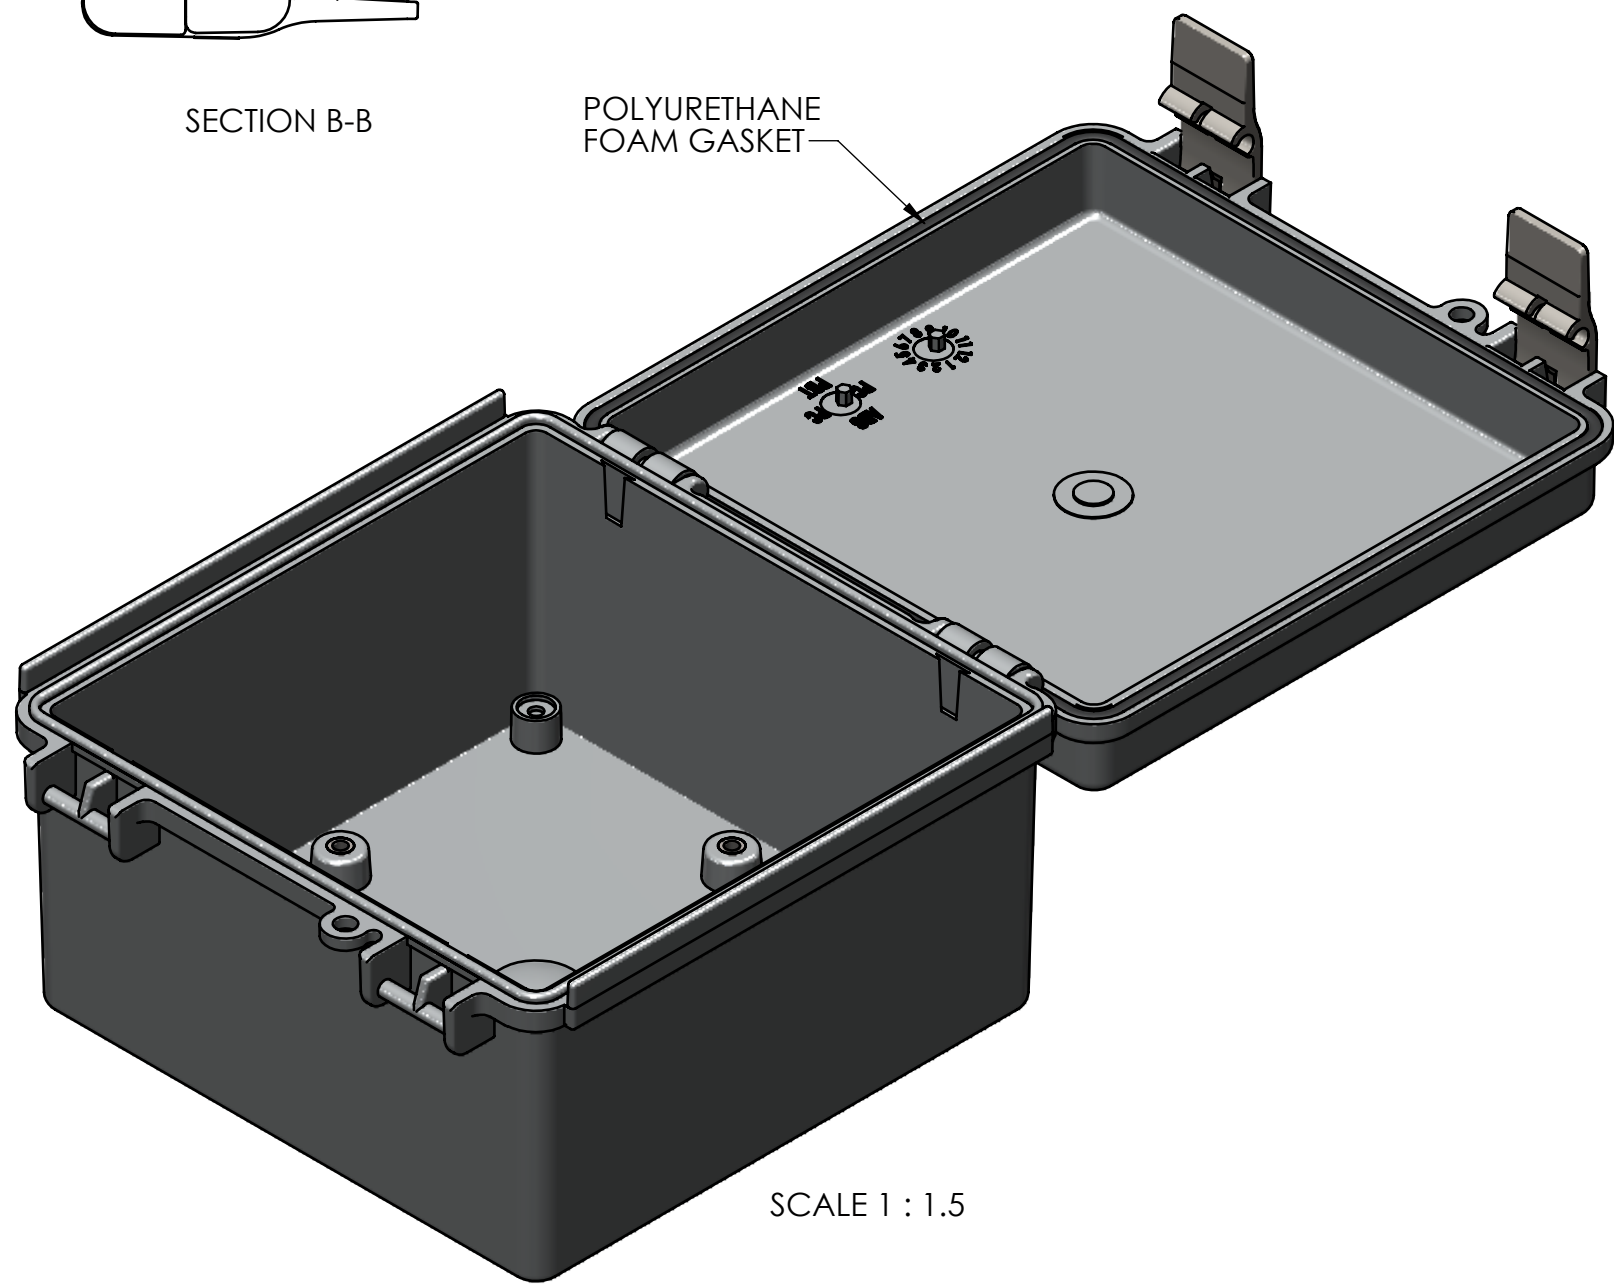

SCALE 1 : 1.5

1	revised base slightly	Douglas French	11-26-2024	TWO PLACE DECIMAL: ±.039 THREE PLACE DECIMAL: ±.039 PRINTED GRAPHICS: ±.039				MATERIAL						
0		Douglas French	9-6-2022	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: WH-10S-02				FLAME RATING UL94-5VA		SIZE D		Hinged Nema Enclosure- Outdoor Use		REV 1
REV.	COMMENT	ZONE	REVISED BY	CREATION DATE	NAME		DATE	DRAWN		DATE	SCALE: 1:1		SHEET 1 OF 1	
REVISIONS				D.M.F.		10/31/2012		J.P.M.		10/31/2012				