

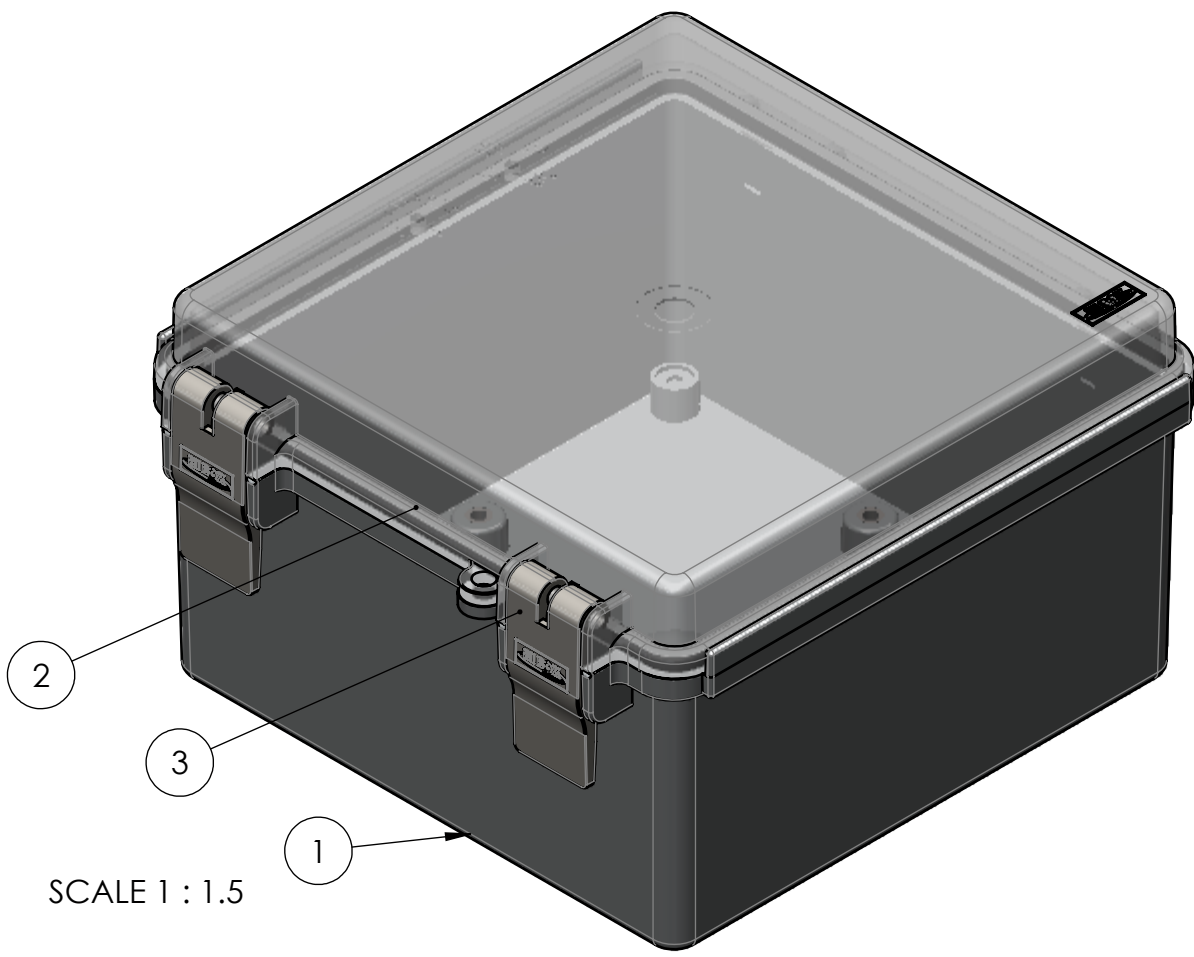
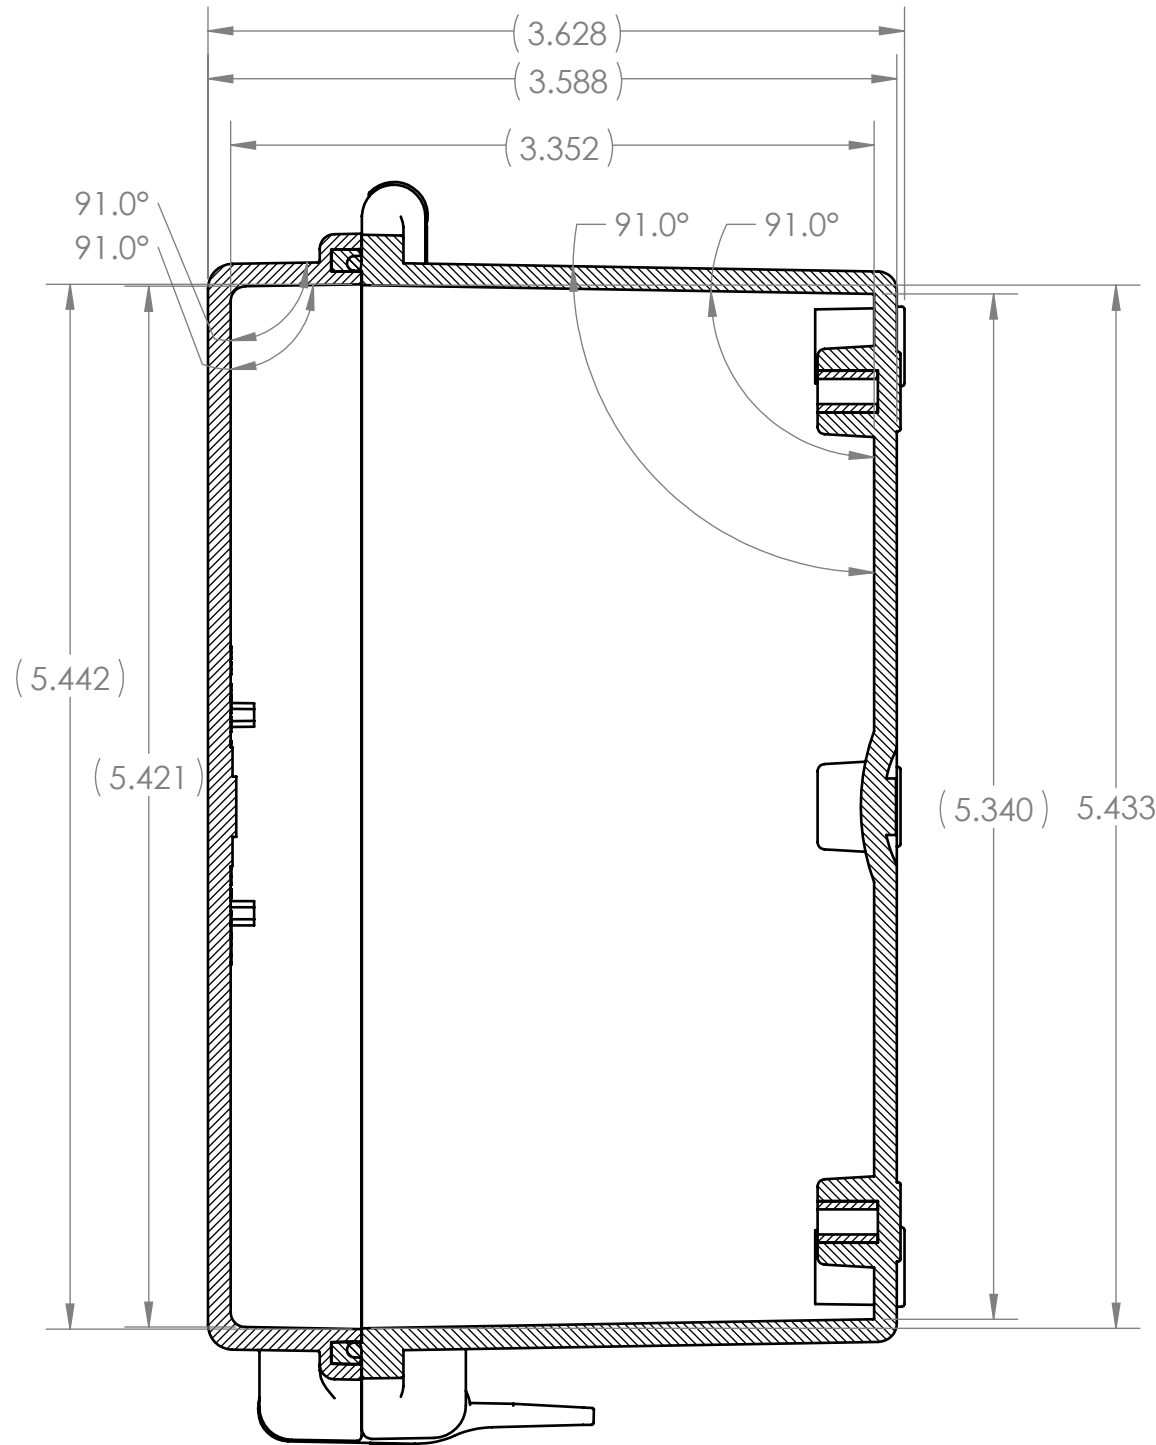
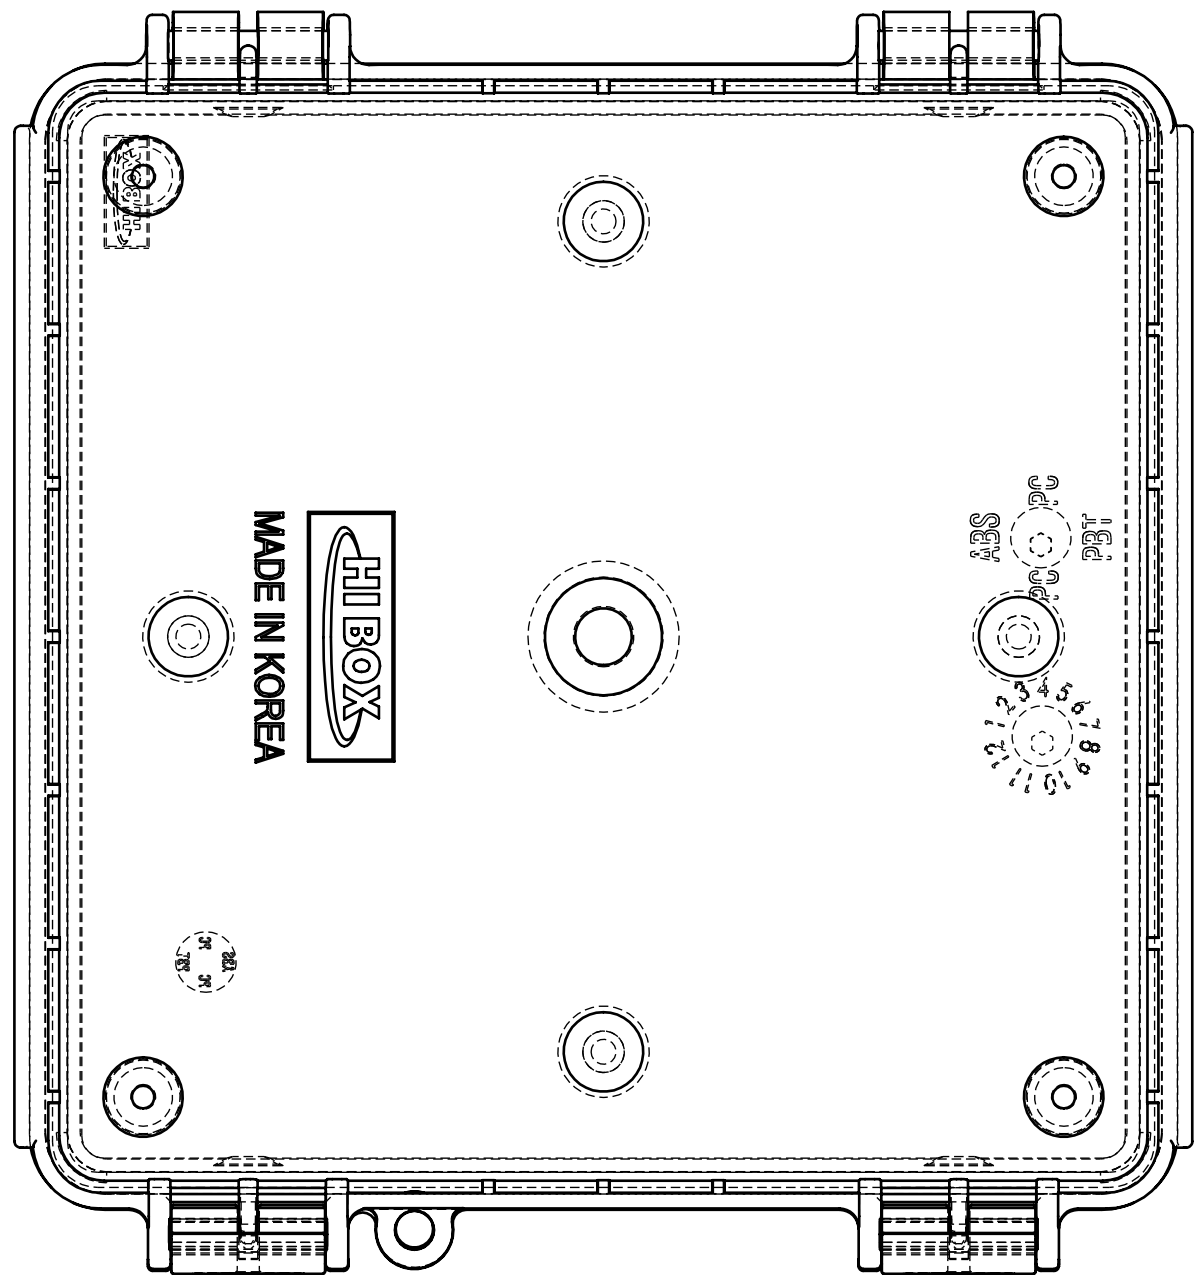
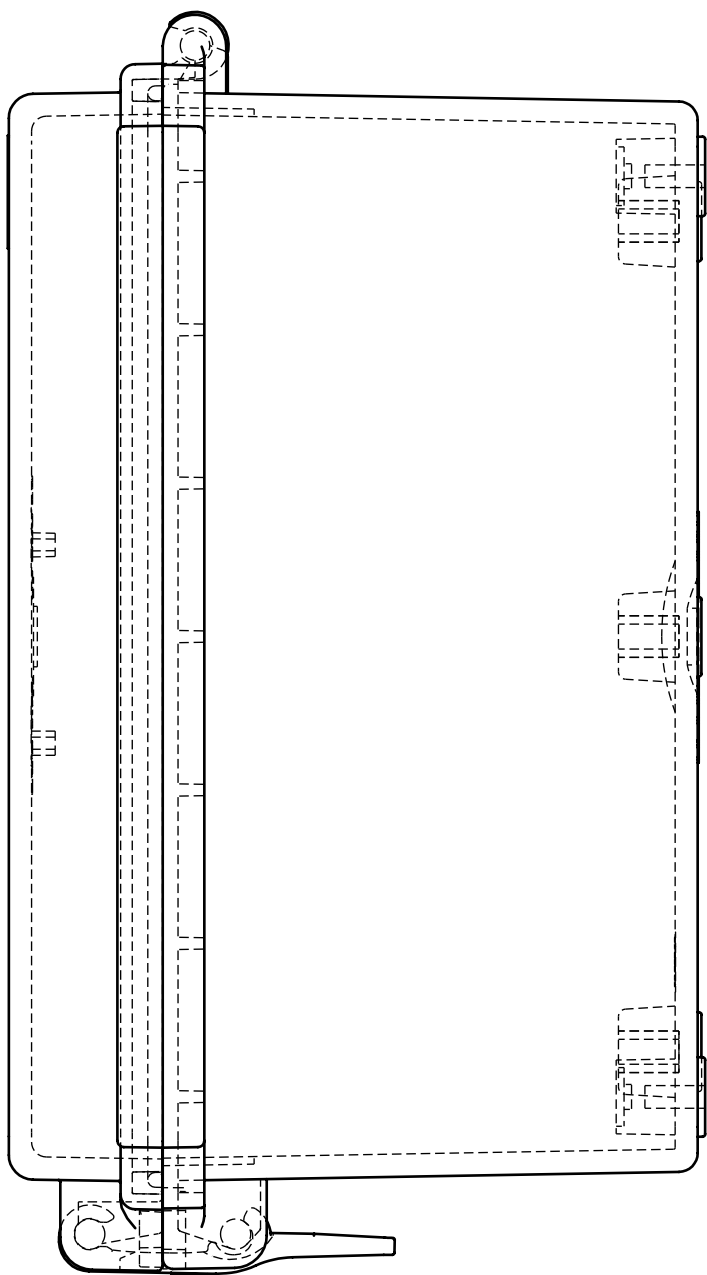


BOM Table								
ITEM NO.	PART NUMBER	Rev.	Description	Material	Flame Rating	Outdoor Suitability	Color	WH-10S-03/QTY.
1	WH-10B-02	1	BASE	PC/PBT	UL94-5VA	UL746C F1	GRAY	1
2	WH-10C-03	0	COVER W/GASKET	PC	UL94V-0	UL746C F1	CLEAR	1
3	WH-02L-01	0	LATCH	PC/PBT	UL94-5VA	UL746C F1	GRAY	2

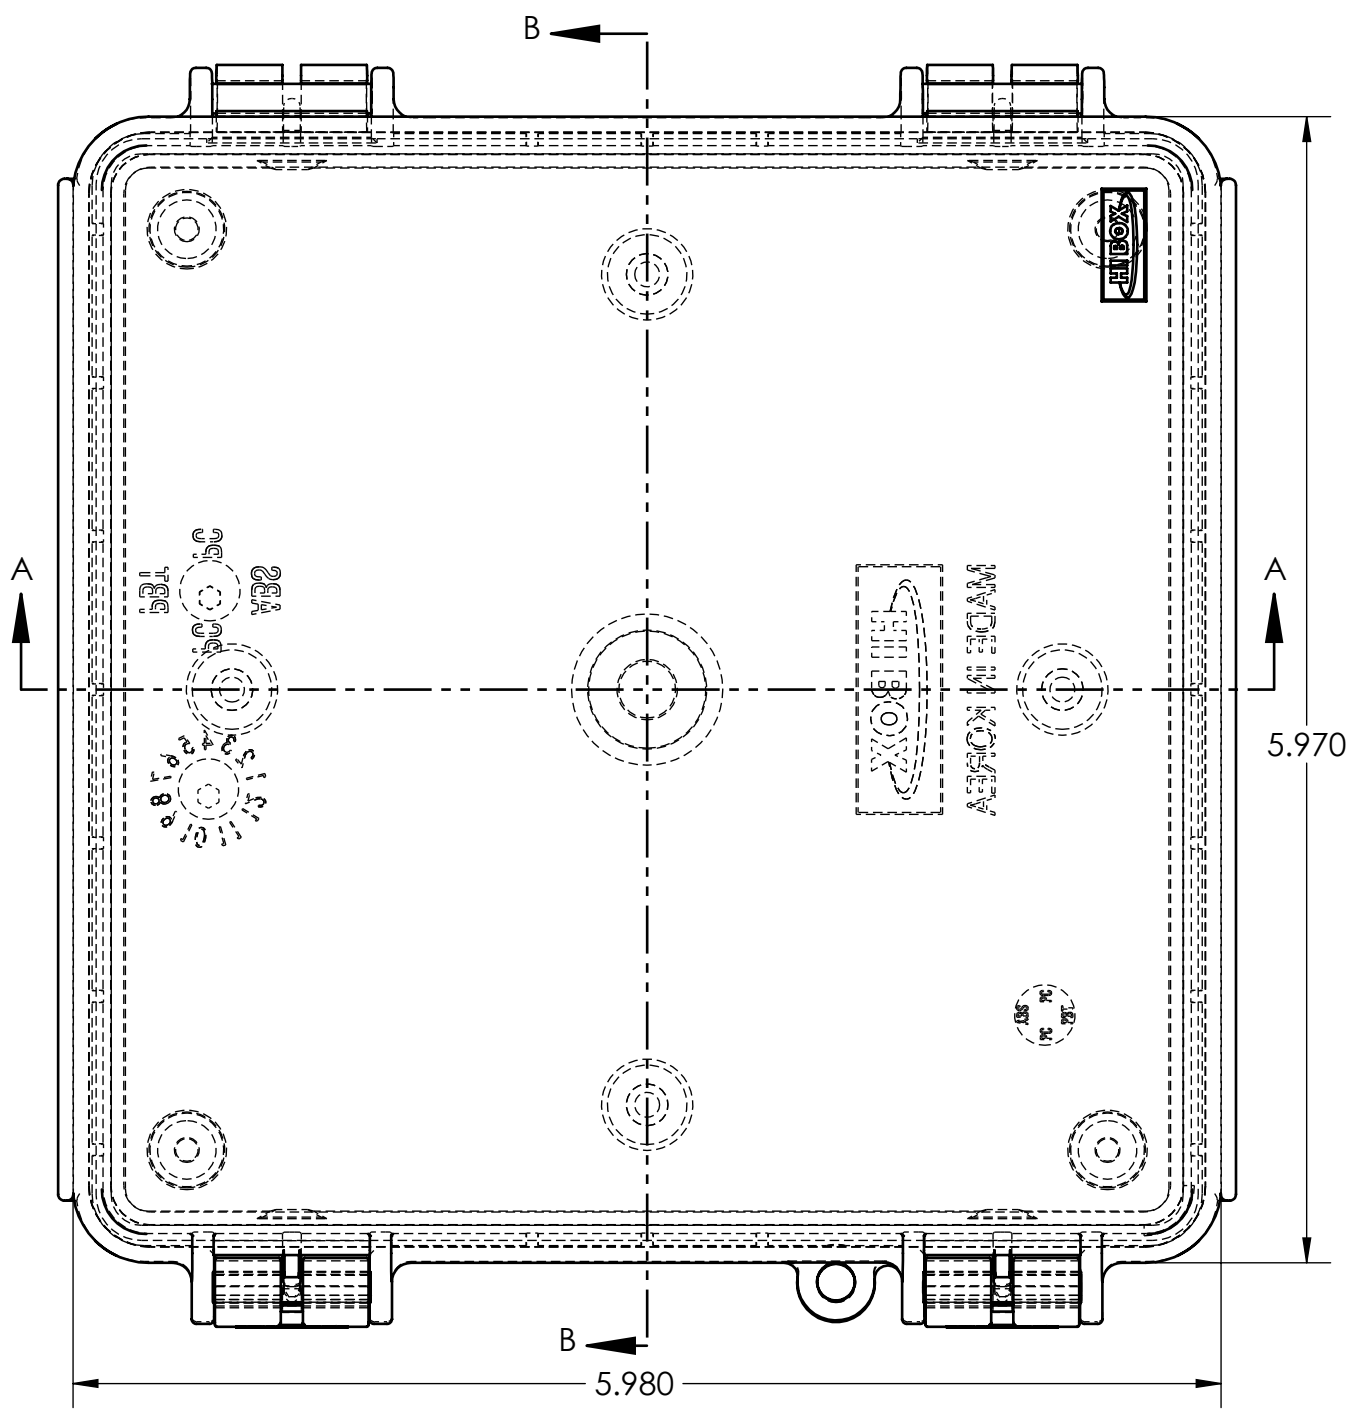



SCALE 1 : 1.5

UL LISTED: UL508-4X (E194432)
CONTINUOUS OPERATING TEMP: -40°C to 75°C/-40°F to 167°F

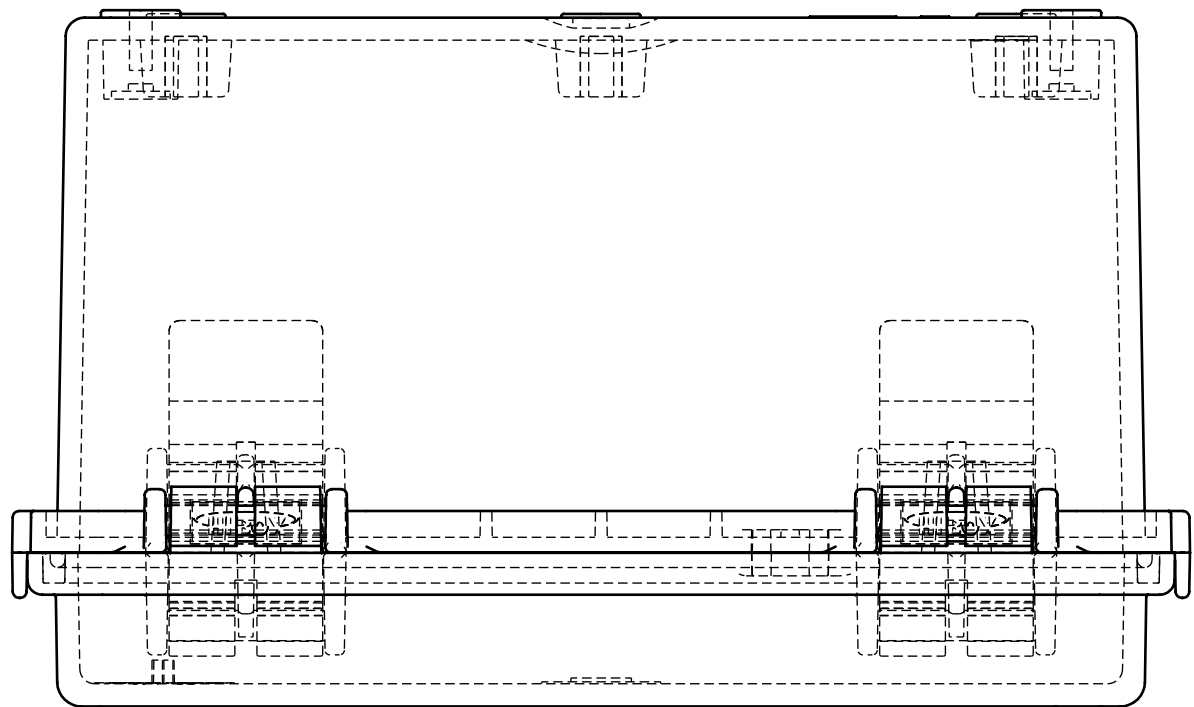


SECTION B-B

POLYURETHANE
FOAM GASKET

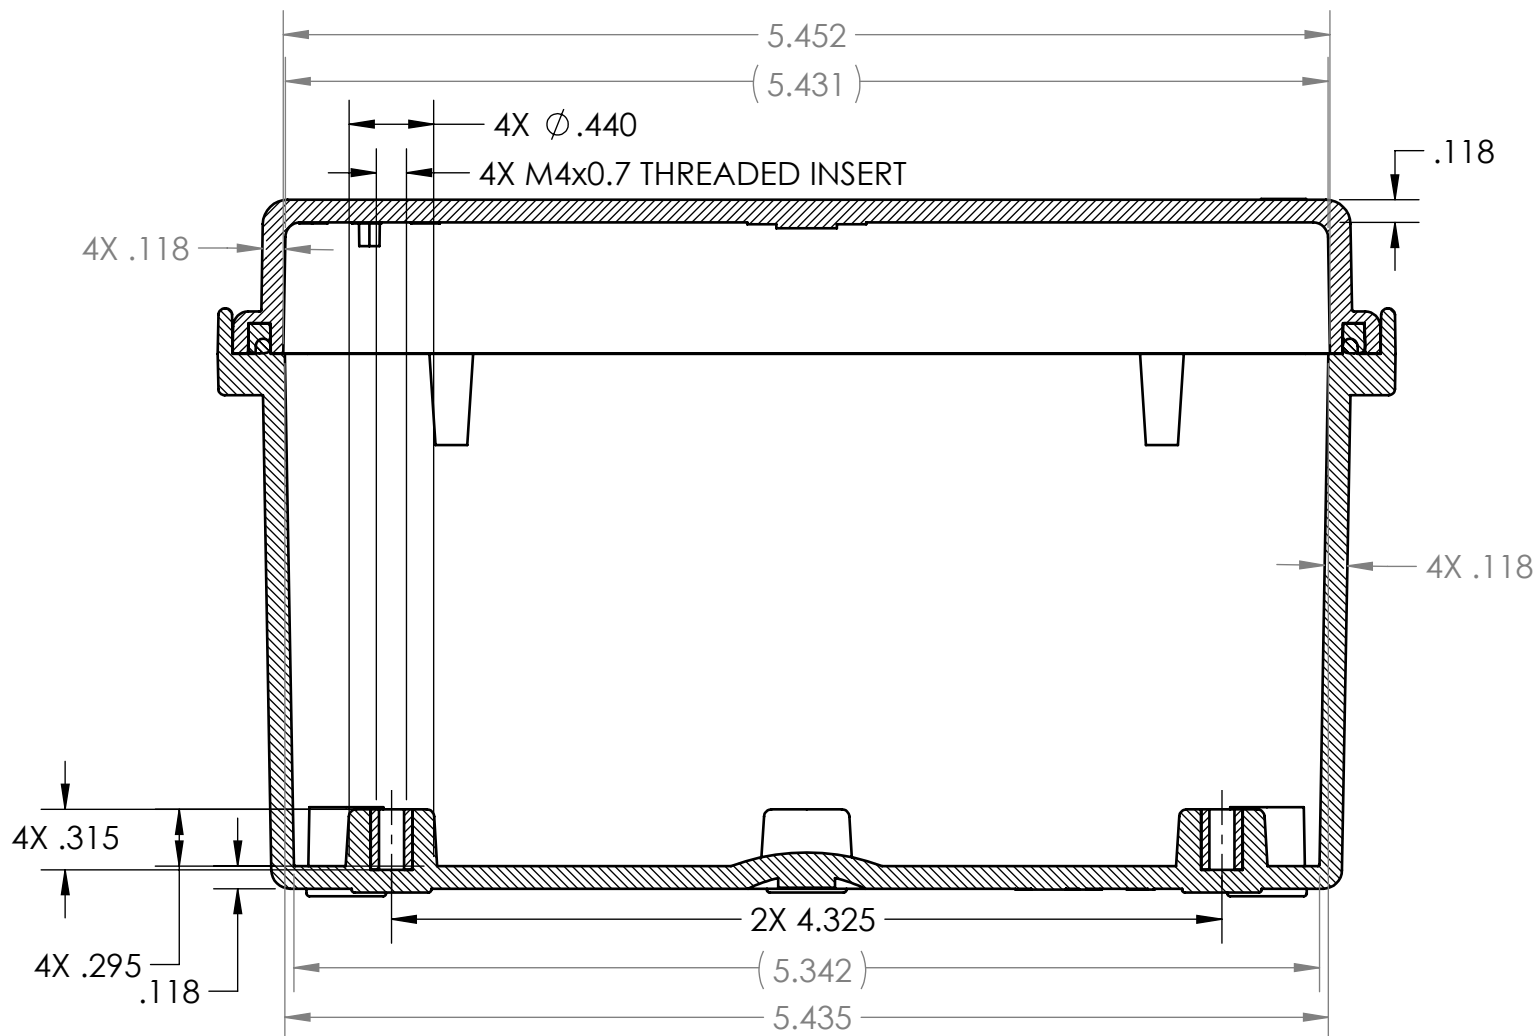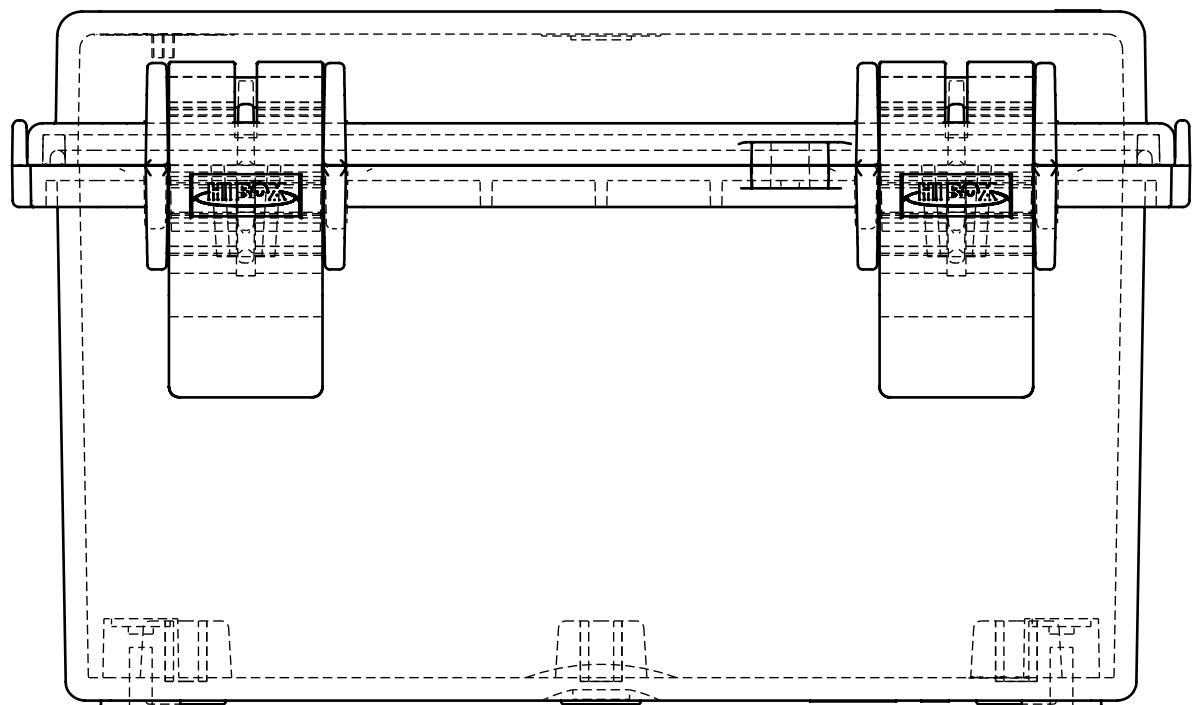

SECTION A-A

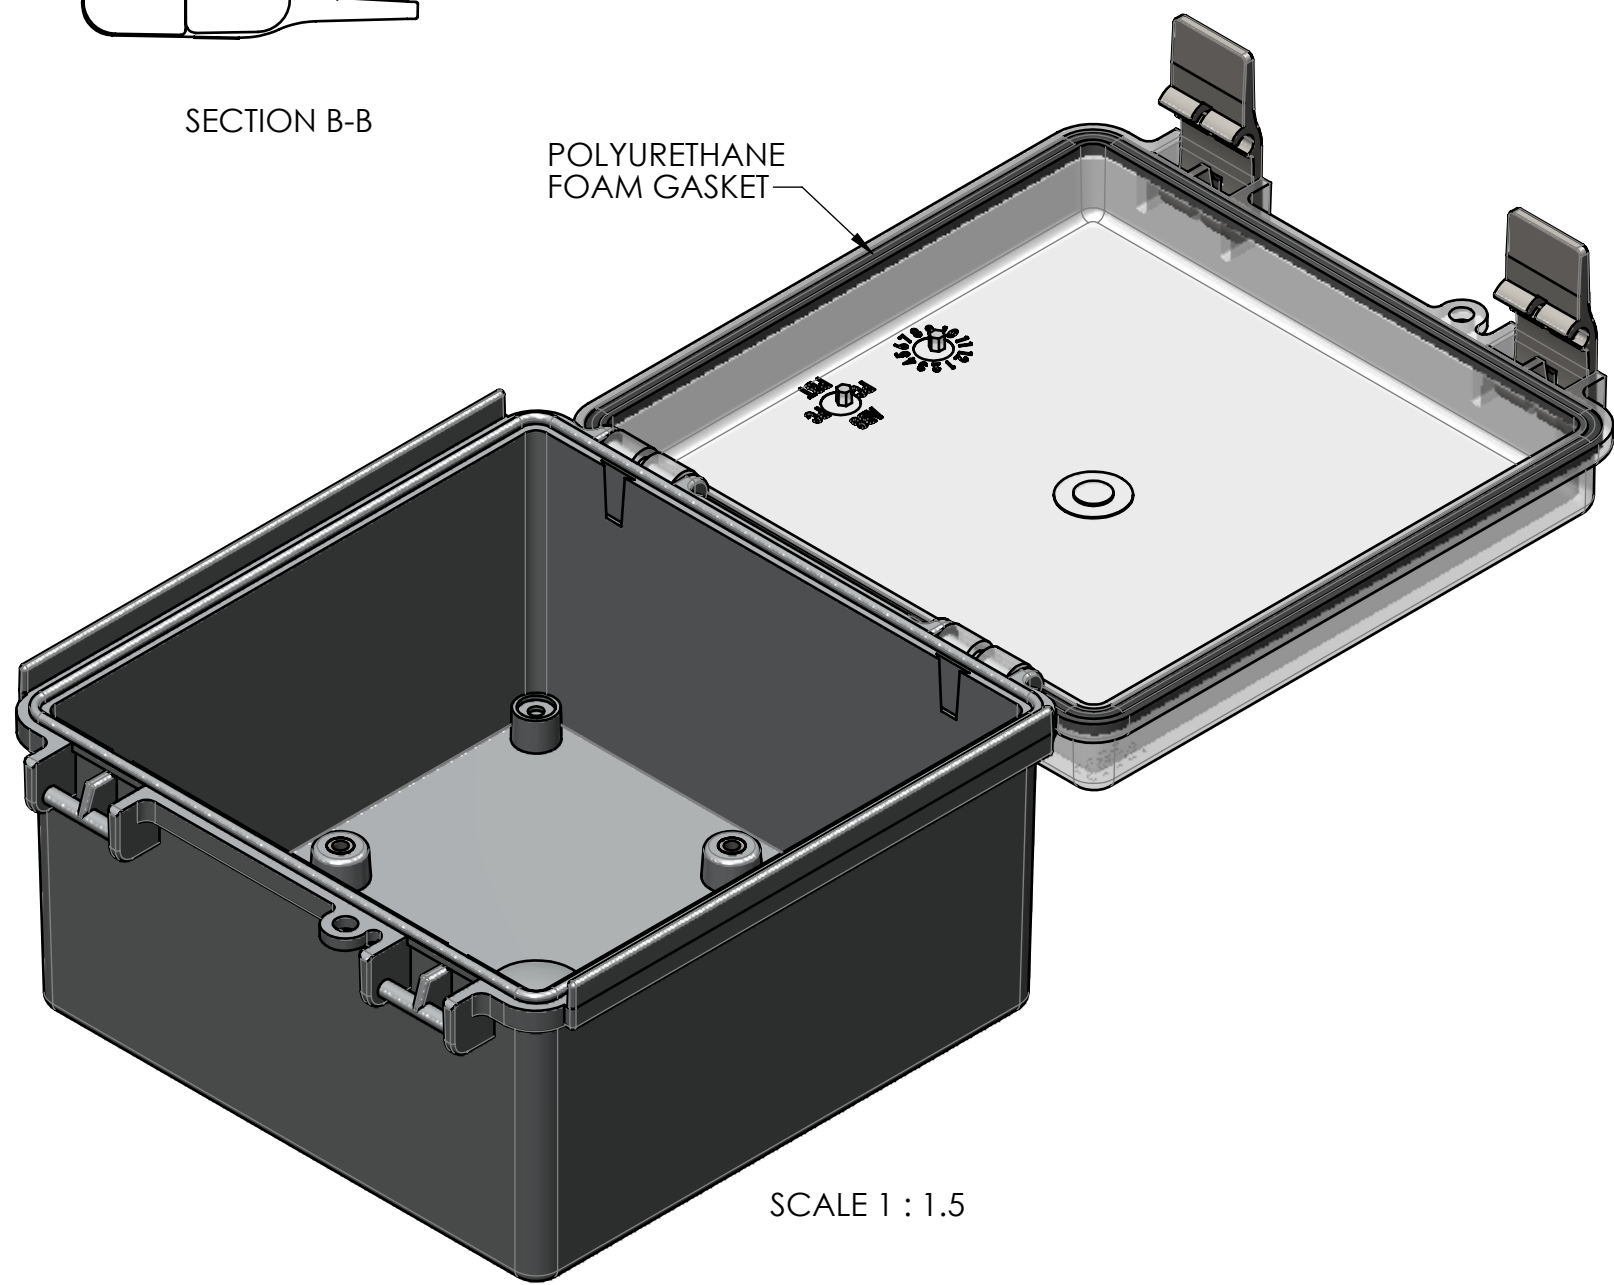

SCALE 1 : 1.5

1	revised base slightly	Douglas French	11-26-2024	MATERIAL				polycase			
0		Douglas French	9-6-2022	TWO PLACE DECIMAL: ±.031 THREE PLACE DECIMAL: ±.019 PRINTED GRAPHICS: ±.001				100 CUSTERS INC. HANNAH AVENUE, CHICO, OHIO 44127-1053 100 CUSTERS INC. HANNAH AVENUE, CHICO, OHIO 44127-1053			
REV.	COMMENT	ZONE	REVISED BY	CREATION DATE	FLAME RATING	SIZE	D	Hinged Nema Enclosure- Outdoor Use	REV	1	
REVISIONS					UL94V-0						
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (mm) TOLERANCES: ANGULAR: ±.4° TWO PLACE DECIMAL: ±.031 THREE PLACE DECIMAL: ±.019 PRINTED GRAPHICS: ±.001 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: WH-105-03					NAME	DATE					
					DRAWN	10/31/2012					
					CHECKED	J.P.M.	10/31/2012				
					SCALE: 1:1						