

Е

D


8

7

6

5

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES[mm] TOLERANCES: ANGULAR: ±2° TWO PLACE DECIMAL: ±.010 THREE PLACE DECIMAL: ±.005 PRINTED GRAPHICS: ±.010 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: WQ-68 ZONE BY APPR'D DATE DRAWN D.M.F. 2/25/2020 CHECKED C.C.B. 3/24/2020 SCALE: 1:2 SHEET 1 OF 1 $\bigcirc \bigcirc$ REVISIONS CAD FILE: WQ-68 4 3 2 1

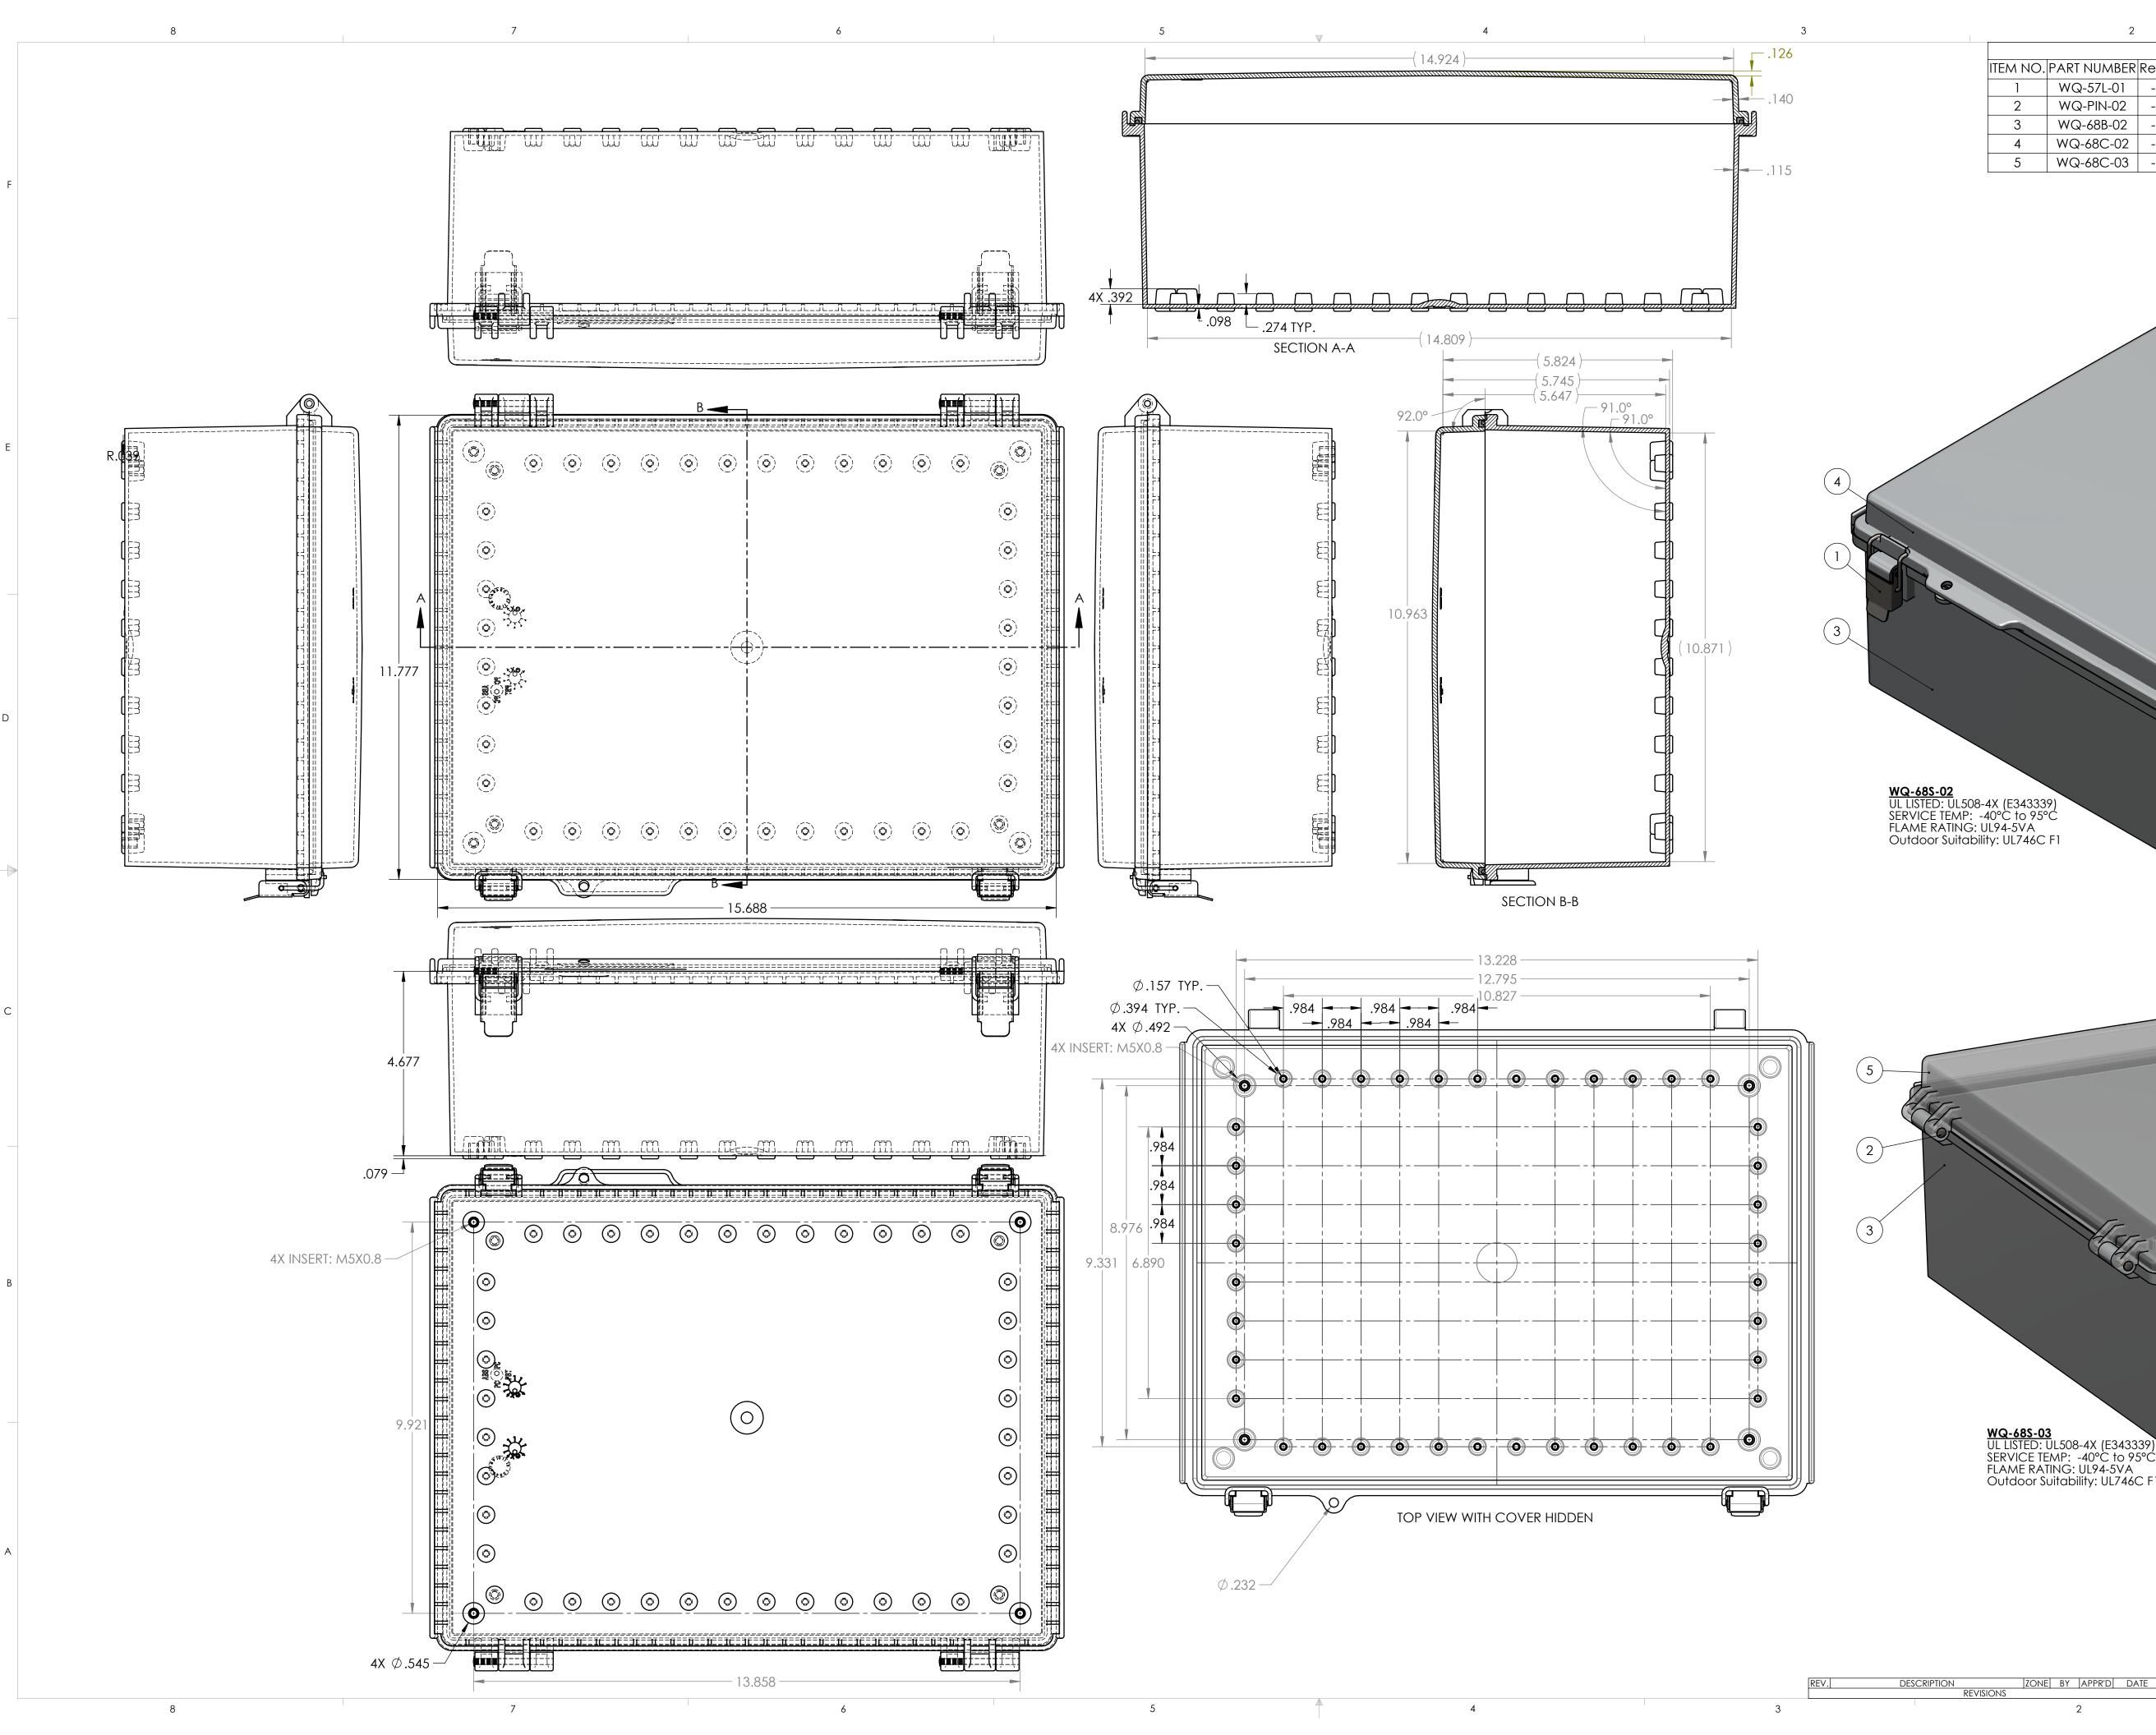

	BOM Table												
ITEM NC	PART NUMBER	Rev.	Description	Material	Color	WQ-68S-02/QTY.	WQ-68S-03/QTY.						
1	WQ-57L-01	-	LATCH ASSEMBLY	-		2	2						
2	WQ-PIN-02	-	HINGE PIN	SST	-	2	2						
3	WQ-68B-02	-	BASE	GFR10/PC	GRAY	1	1						
4	WQ-68C-02	-	COVER W/GASKET	PC	GRAY	1	_						
5	WQ-68C-03	-	COVER W/GASKET	PC	CLEAR	-]						

WQ-685-03 UL LISTED: UL508-4X (E343339) SERVICE TEMP: -40°C to 95°C FLAME RATING: UL94-5VA Outdoor Suitability: UL746C F1

2

ST

	UNLESS OTHERWISE SPEC	ICHES[mm]	PART NO. WQ-68S-02								
	DIMENSIONS ARE IN: INCH										
	TOLERANCES: ANGULA	· - [
	TWO PLACE DECIMAL THREE PLACE DECIMA		MATERIAL								
	PRINTED GRAPHICS:							1305 CHESTER IND.	PARKWAY AVO	N, OHIO 44011-1083 U.S.	
	PROPRIFTARY AND CONFIL						PH#: 1-800-248-1233, 440-934-0444 FAX#: 440-934-0088				
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF		FLAME RATING			SIZE	Hinged Nema Enclosure- Outdoor Use			REV	
	POLYCASE. ANY REPRODUCTION	CTION IN PART	UL94-5VA						-		
	OR AS A WHOLE WITHOUT TH	E WRITTEN		NAME	DATE						
	PERMISSION OF POLYCASE IS PROHIBITED.		DRAWN	D.M.F.	2/25/2020	5041	E: 1:2	$\triangle -1$	сці	SHEET 1 OF 1	
	CAD FILE: WQ-68S		CHECKED	C.C.B.	3/24/2020	JCAL	L. I.Z	W S	SHL	JULLI I OF I	

∙ KEV

Δ