



BOM Table						
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	QTY.
1	WQ-77S-02	-	Hinged Nema Enclosure-Outdoor Use			1
1.1	WQ-77B-02	-	BASE	GFR10/PC	GRAY	1
1.2	WQ-77C-02	-	COVER W/GASKET	PC	GRAY	1
1.3	WQ-76L-01	-.01	LATCH ASSEMBLY	-	-	3
1.4	WQ-PIN-03	-	HINGE PIN	SST	-	3
2	SCREWS-026-004	-	SCREWS, 4 PACK			1
2.1	SCREWS-026	-	M5X0.8 x 10mm CROSS TRUSS HEAD SCREW			4

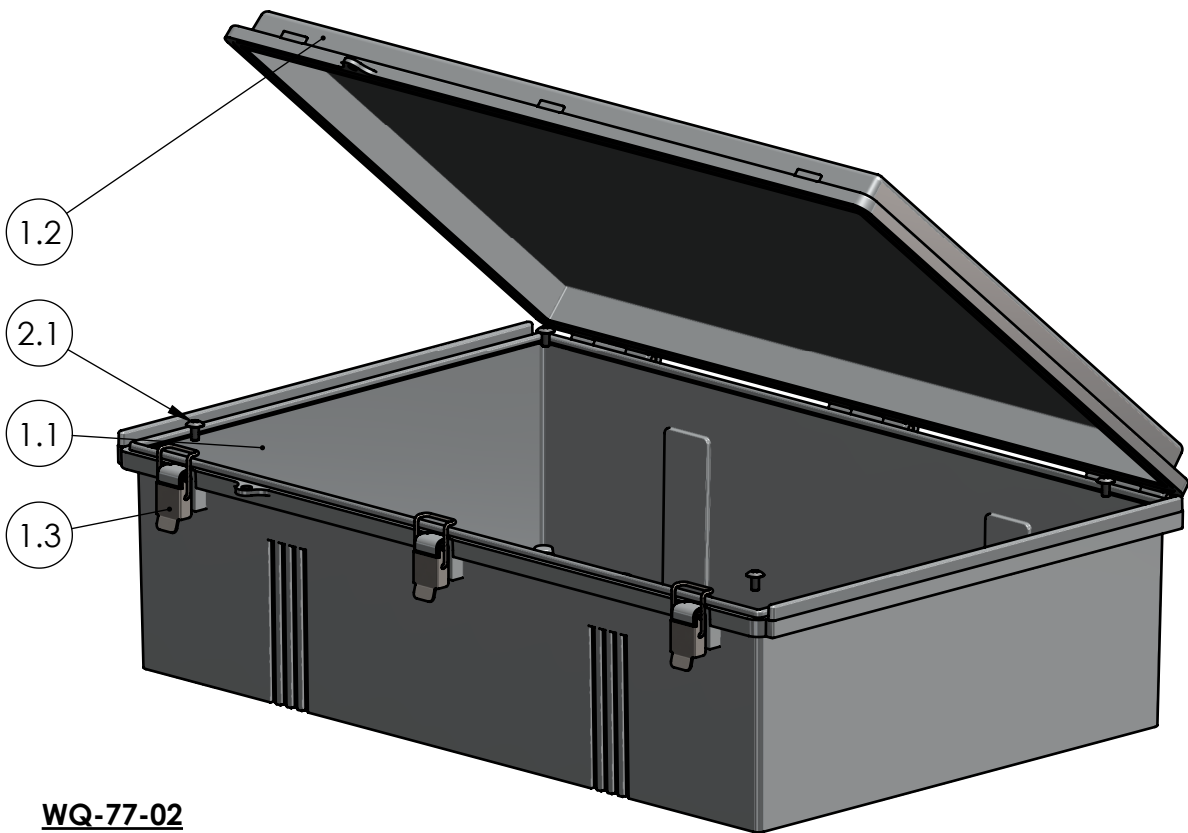

WQ-77-02
UL LISTED: UL508-4X
SERVICE TEMP: -40°C to 95°C
FLAME RATING: 5VA
Outdoor Suitability: UL746C F1

BOM Table						
ITEM NO.	PART NUMBER	Rev.	Description	Material	Color	QTY.
1	WQ-77S-03	-	Hinged Nema Enclosure-Outdoor Use			1
1.1	WQ-77B-02	-	BASE	GFR10/PC	GRAY	1
1.2	WQ-77C-03	-	COVER W/GASKET	PC	CLEAR	1
1.3	WQ-76L-01	-.01	LATCH ASSEMBLY	-	-	3
1.4	WQ-PIN-03	-	HINGE PIN	SST	-	3
2	SCREWS-026-004	-	SCREWS, 4 PACK			1
2.1	SCREWS-026	-	M5X0.8 x 10mm CROSS TRUSS HEAD SCREW			4

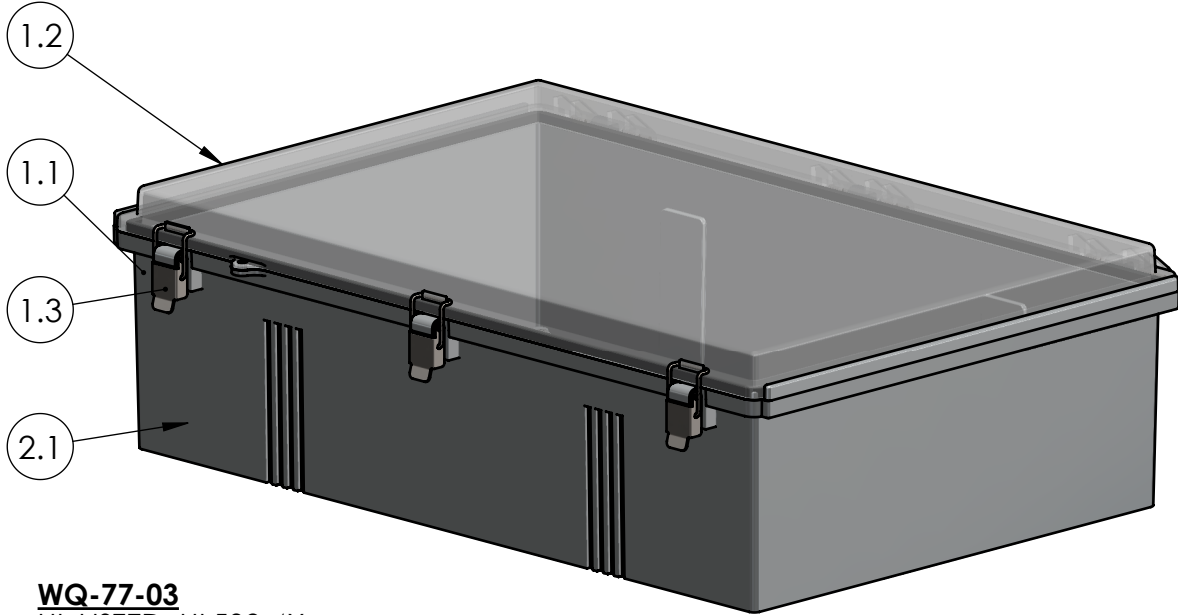




WQ-77-03
UL LISTED: UL508-4X
SERVICE TEMP: -40°C to 95°C
FLAME RATING: 5VA
Outdoor Suitability: UL746C F1

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN: INCHES[mm] TOLERANCES: ANGULAR: ±° TWO PLACE DECIMAL: ±. THREE PLACE DECIMAL: ±. PRINTED GRAPHICS: ±.		PART NO. WQ-77		MATERIAL	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLYCASE. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLYCASE IS PROHIBITED. CAD FILE: WQ-77		FLAME RATING 5VA		SIZE C	
DRAWN CHECKED		NAME D.M.F. C.C.B.		DATE 4/6/2021 4/20/2021	
SCALE: 1:5		Hinged Nema Enclosure, Outdoor Use, with Screw Kit		REV -	
SHEET 1 OF 1					

REV.	DESCRIPTION	ZONE	BY	APPR'D	DATE
REVISIONS					

F
E
D
C
B
A

F
E
D
C
B
A

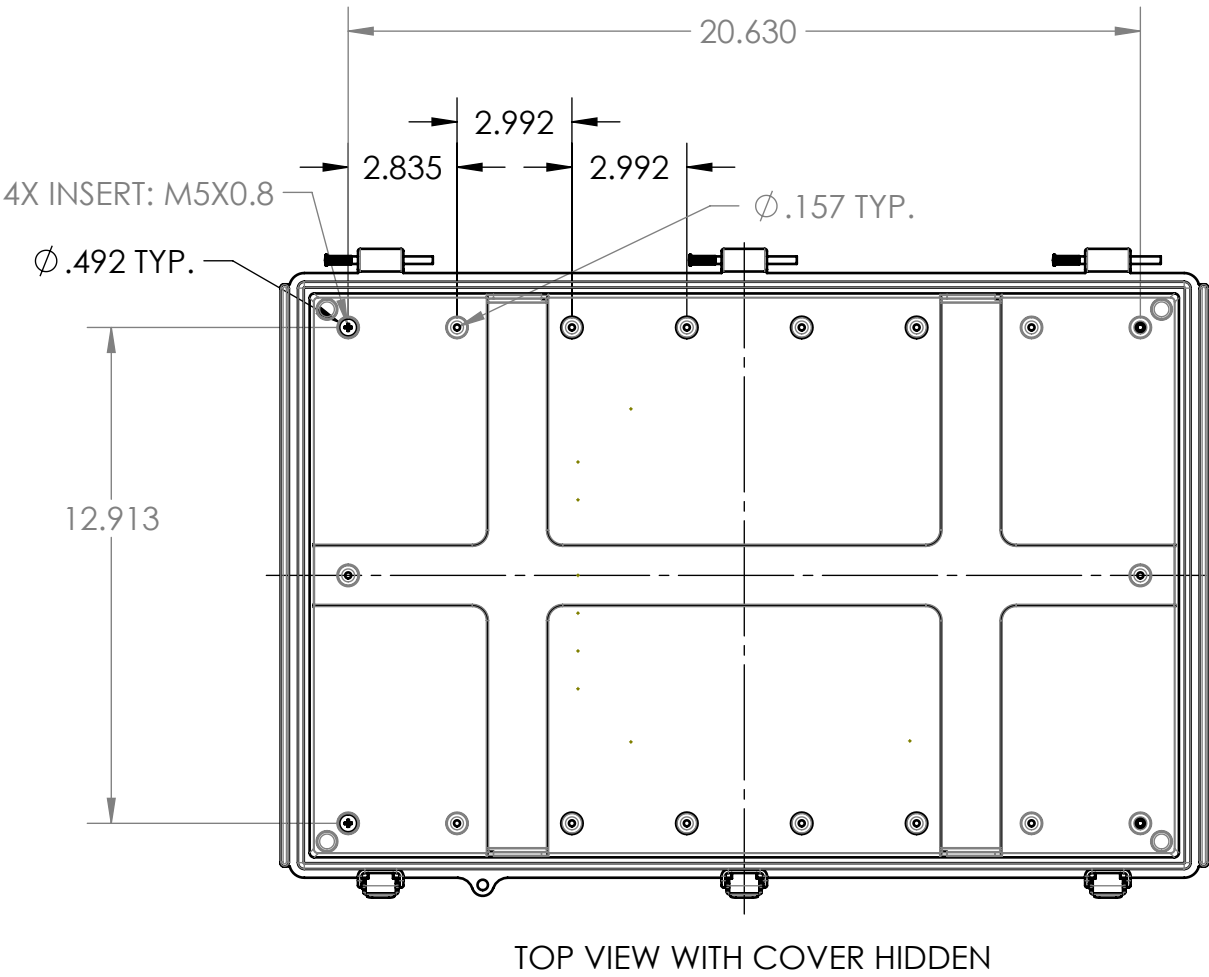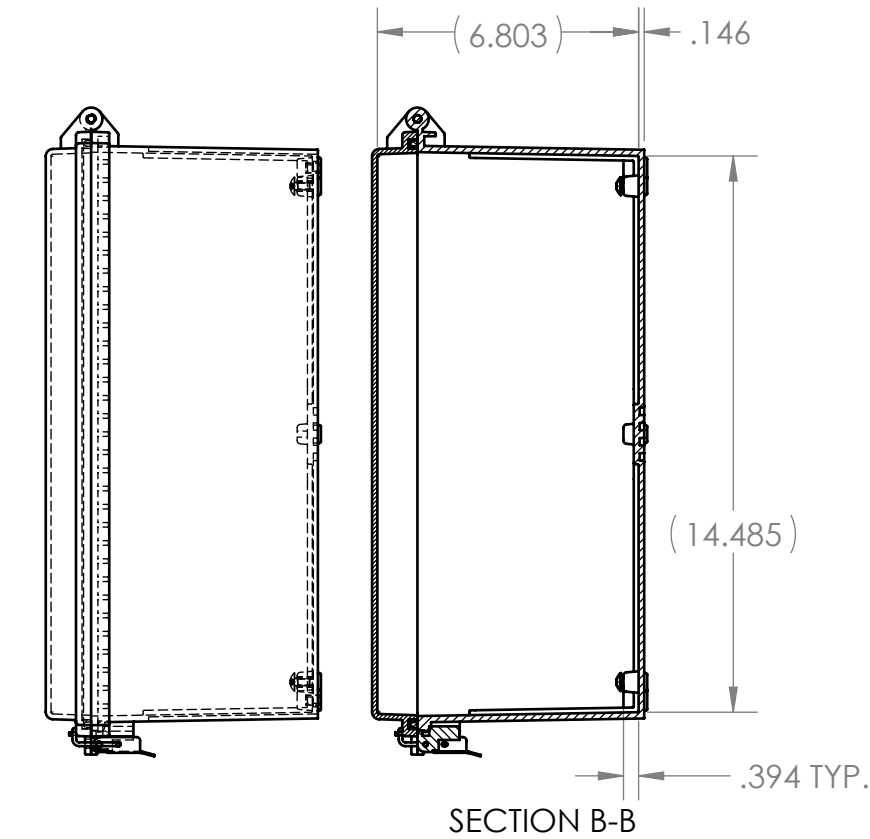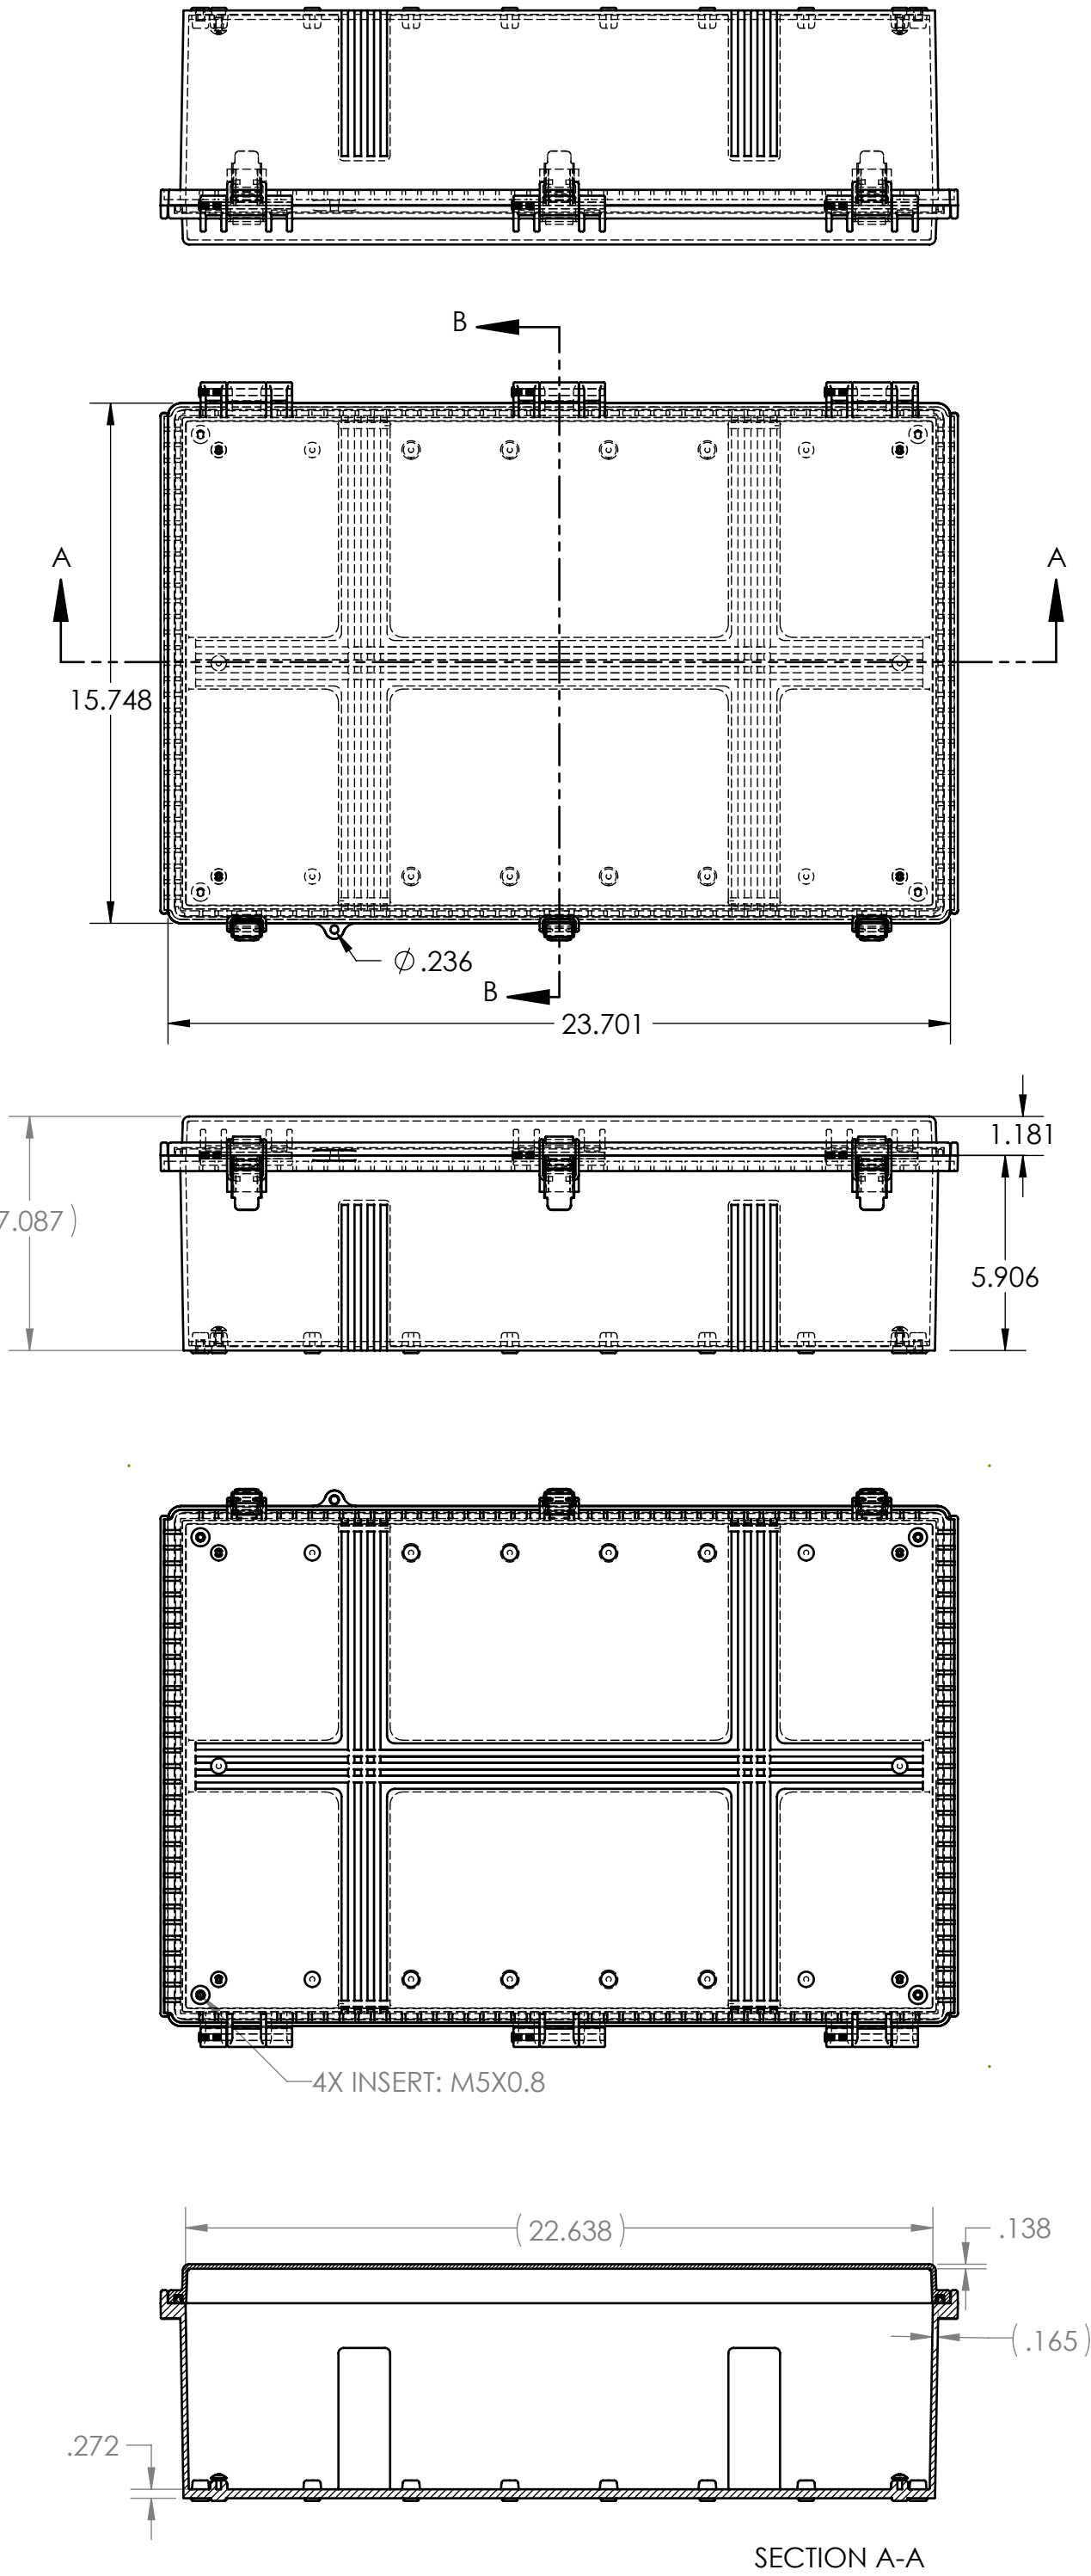

TOP VIEW WITH COVER HIDDEN

SECTION A-A

SECTION B-B